3VM1132-3EE32-0AA0

Data sheet



circuit breaker 3VM1 IEC frame 160 breaking capacity class N Icu=25kA @ 415V 3-pole, line protection TM220, ATFM, In=32A overload protection Ir=22A...32A short-circuit protection Ii=10 x In nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM220
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / at 50/60 Hz / rated value	500 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	11 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	3.53 W
mechanical service life (operating cycles) / typical	15 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
 communication function 	No
 other measurement function 	No
Net Weight	937 g
Current	
operational current	
• at 40 °C	32 A
• at 45 °C	32 A
● at 50 °C	32 A
● at 55 °C	31 A
• at 60 °C	31 A
● at 65 °C	30 A
● at 70 °C	30 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	N
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
• at 500 V	7 kA
operating short-circuit current breaking capacity (Ics)	

• at 240 V	27 kA
• at 415 V	18 kA
• at 440 V	12 kA
• at 500 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	76 kA
• at 415 V	53 kA
• at 440 V	32 kA
• at 500 V	12 kA
design of short-circuit protection	For switching capacity values in DC power systems, see the 3VA Molded Case Circuit Breaker Manual; link available under Service & Support in the last chapter
Adjustable parameters	Shaptor
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic	
• minimum	22 A
• maximum	32 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1 s
• maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	320 A
• maximum	320 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
adjustable current response value current / of instantaneous short-circuit trip unit	
• maximum	320 A
product function / grounding protection	No
Machanical Decision	
Mechanical Design	
product component	
product component • undervoltage release	No
product component • undervoltage release • voltage trigger	No
product component • undervoltage release • voltage trigger • trip indicator	No No
product component	No No 5.12 in
product component	No No 5.12 in 130 mm
product component	No No 5.12 in 130 mm 3 in
product component	No No 5.12 in 130 mm 3 in 76.2 mm
product component	No No 5.12 in 130 mm 3 in
product component	No No 5.12 in 130 mm 3 in 76.2 mm
product component	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in
product component	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No No S.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin

during storage / minimumduring storage / maximum

-40 °C 80 °C

Approvals / Certificates

General Product Approval



Confirmation







Miscellaneous

General Product Approval

Test Certificates

Marine / Shipping



Miscellaneous









Marine / Shipping

other

Environment



Miscellaneous

Confirmation

Environmental Confirmations Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM1132-3EE32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VM1132-3EE32-0AA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM1132-3EE32-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications

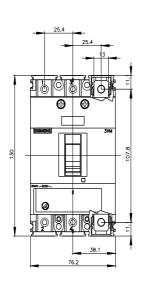

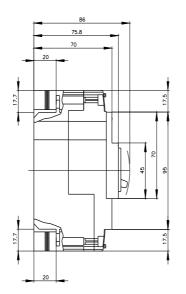

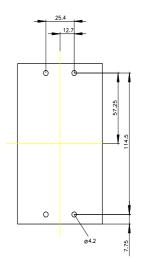



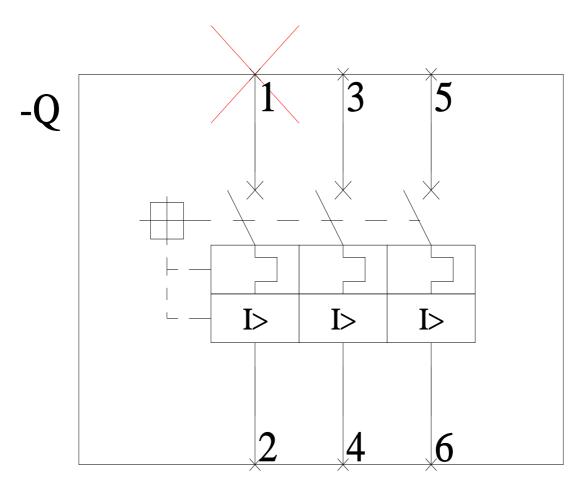

last modified: 3/11/2024 🖸

