## **SIEMENS**

Data sheet 3RU2146-4JB0



Overload relay 45...63 A Thermal For motor protection Size S3, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

| product brand name   | SIRIUS                 |  |
|--|------------------------|--|
| product designation  | thermal overload relay |  |
| product type designation   | 3RU2                   |  |
| General technical data   |                        |  |
| size of overload relay   | S3                     |  |
| size of contactor can be combined company-specific   | S3                     |  |
| power loss [W] for rated value of the current at AC in hot operating state                             | 17.1 W                 |  |
| • per pole   | 5.7 W                  |  |
| insulation voltage with degree of pollution 3 at AC rated value  | 1 000 V                |  |
| surge voltage resistance rated value   | 8 kV                   |  |
| maximum permissible voltage for protective separation  |                        |  |
| <ul> <li>in networks with ungrounded star point between auxiliary<br/>and auxiliary circuit</li> </ul> | 440 V                  |  |
| <ul> <li>in networks with grounded star point between auxiliary<br/>and auxiliary circuit</li> </ul>   | 440 V                  |  |
| <ul> <li>in networks with ungrounded star point between main and<br/>auxiliary circuit</li> </ul>      | 440 V                  |  |
| <ul> <li>in networks with grounded star point between main and<br/>auxiliary circuit</li> </ul>        | 440 V                  |  |
| shock resistance according to IEC 60068-2-27   | 8g / 11 ms             |  |
| reference code according to IEC 81346-2  | F                      |  |
| Substance Prohibitance (Date)  | 03/01/2017             |  |
| SVHC substance name  | Lead - 7439-92-1       |  |
| Weight   | 0.56 kg                |  |
| Ambient conditions   |                        |  |
| installation altitude at height above sea level maximum  | 2 000 m                |  |
| ambient temperature  |                        |  |
| during operation   | -40 +70 °C             |  |
| during storage   | -55 +80 °C             |  |
| during transport   | -55 +80 °C             |  |
| temperature compensation   | -40 +60 °C             |  |
| relative humidity during operation   | 10 95 %                |  |
| Main circuit   |                        |  |
| number of poles for main current circuit   | 3                      |  |
| adjustable current response value current of the current-<br>dependent overload release                | 45 63 A                |  |
| operating voltage  |                        |  |
| rated value  | 1 000 V                |  |
| • at AC-3e rated value maximum   | 1 000 V                |  |
| operating frequency rated value  | 50 60 Hz               |  |
| operational current rated value  | 63 A                   |  |

| number of NO contacts for auxiliary contacts  | ed actor disconnection sage "Tripped"                   |
|---|---|
| at AC-3  — at 400 V rated value — at 500 V rated value — at 690 V rated value 55 kW  at AC-3e — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value  Auxiliary circuit  design of the auxiliary switch  number of NC contacts for auxiliary contacts  a note  number of NO contacts for auxiliary contacts  a note  number of CO contacts for auxiliary contacts  a note  a not | actor disconnection                                     |
| - at 400 V rated value 30 kW - at 500 V rated value 55 kW - at 690 V rated value 55 kW  • at AC-3e - at 400 V rated value 30 kW - at 500 V rated value 37 kW - at 690 V rated value 55 kW  Auxiliary circuit  design of the auxiliary switch integrate 10 note for contacts • note for contacts for auxiliary contacts 1 number of NO contacts for auxiliary contacts 1 note for mession number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 • at 24 V 3 A  | actor disconnection                                     |
| - at 500 V rated value - at 690 V rated value 55 kW  ■ at AC-3e - at 400 V rated value 30 kW - at 500 V rated value 37 kW - at 690 V rated value 37 kW - at 690 V rated value 55 kW  Auxiliary circuit  design of the auxiliary switch number of NC contacts for auxiliary contacts ■ note number of NO contacts for auxiliary contacts 1 ■ note number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 ■ at 24 V 37 kW 37 k | actor disconnection                                     |
| - at 690 V rated value  • at AC-3e  - at 400 V rated value  - at 500 V rated value  - at 690 V rated value  - at 690 V rated value  55 kW  Auxiliary circuit  design of the auxiliary switch  number of NC contacts for auxiliary contacts  • note  number of NO contacts for auxiliary contacts  1  • note  number of CO contacts for auxiliary contacts  0  operational current of auxiliary contacts at AC-15  • at 24 V  3 A  | actor disconnection                                     |
| at AC-3e — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value  Auxiliary circuit  design of the auxiliary switch number of NC contacts for auxiliary contacts  anote number of NO contacts for auxiliary contacts  anote number of CO contacts for auxiliary contacts  at 24 V  3 A  | actor disconnection                                     |
| - at 400 V rated value 30 kW - at 500 V rated value 37 kW - at 690 V rated value 55 kW  Auxiliary circuit  design of the auxiliary switch integrate 10 number of NC contacts for auxiliary contacts 1 for contacts 1 number of NO contacts for auxiliary contacts 1 for messence 1 number of NO contacts for auxiliary contacts 1 for messence 10 number of CO contacts for auxiliary contacts 1 for messence 10 number of CO contacts for auxiliary contacts 3 | actor disconnection                                     |
| - at 500 V rated value 37 kW - at 690 V rated value 55 kW  Auxiliary circuit  design of the auxiliary switch integrate number of NC contacts for auxiliary contacts  • note for contacts  • note for must number of NO contacts for auxiliary contacts  • note for mess number of CO contacts for auxiliary contacts  0 operational current of auxiliary contacts at AC-15  • at 24 V 3 A   | actor disconnection                                     |
| — at 690 V rated value 55 kW  Auxiliary circuit  design of the auxiliary switch integrate number of NC contacts for auxiliary contacts 1  • note for contacts in auxiliary contacts 1  • note note for mession number of CO contacts for auxiliary contacts 0  operational current of auxiliary contacts at AC-15  • at 24 V 3 A  | actor disconnection                                     |
| Auxiliary circuit  design of the auxiliary switch  number of NC contacts for auxiliary contacts  • note  number of NO contacts for auxiliary contacts  • note  number of CO contacts for auxiliary contacts  onte  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at AC-15  • at 24 V  3 A   | actor disconnection                                     |
| design of the auxiliary switch  number of NC contacts for auxiliary contacts  • note  number of NO contacts for auxiliary contacts  • note  number of CO contacts for auxiliary contacts  onde  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at AC-15  • at 24 V  3 A  | actor disconnection                                     |
| number of NC contacts for auxiliary contacts  • note  number of NO contacts for auxiliary contacts  • note  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at AC-15  • at 24 V  3 A  | actor disconnection                                     |
| ● note for contain number of NO contacts for auxiliary contacts  ● note for mession number of CO contacts for auxiliary contacts  Operational current of auxiliary contacts at AC-15  ● at 24 V 3 A   |   |
| number of NO contacts for auxiliary contacts  onote for mess number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at AC-15 on at 24 V  3 A   |   |
| note for mess number of CO contacts for auxiliary contacts      operational current of auxiliary contacts at AC-15         • at 24 V          3 A   | sage "Tripped"  |
| number of CO contacts for auxiliary contacts 0  operational current of auxiliary contacts at AC-15  • at 24 V 3 A   | sage "Tripped"  |
| operational current of auxiliary contacts at AC-15  • at 24 V 3 A   |   |
| • at 24 V 3 A   |   |
|   |   |
|   |   |
| • at 110 V 3 A  |   |
| • at 120 V 3 A  |   |
| • at 125 V 3 A  |   |
| • at 230 V 2 A  |   |
| • at 400 V 1 A  |   |
| • at 690 V 0.75 A   |   |
| operational current of auxiliary contacts at DC-13  |   |
| • at 24 V 2 A   |   |
| • at 60 V 0.3 A   |   |
| • at 110 V 0.22 A   |   |
| • at 125 V 0.22 A   |   |
| • at 220 V 0.11 A   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required 6A (SCC)  | C less than equal to 0.5 kA; U less than equal to 260V) |
| contact rating of auxiliary contacts according to UL B600 / F   | R300  |
| Protective and monitoring functions   |   |
| trip class CLASS  | 10  |
| design of the overload release thermal  |   |
| UL/CSA ratings  |   |
| full-load current (FLA) for 3-phase AC motor  |   |
| • at 480 V rated value 52 A   |   |
| • at 600 V rated value 62 A   |   |
| Short-circuit protection  |   |
| design of the fuse link   |   |
| for short-circuit protection of the main circuit  |   |
| ·   | gG: 160 A; 1000 V: a.M. / g.B.: 125 A                   |
|   | gG: 125 A; 1000 V: a.M. / g.B.: 125 A                   |
|   | : 6 A, quick: 10 A                                      |
| Installation/ mounting/ dimensions  |   |
| mounting position any   |   |
|   | or mounting   |
| height 105 mm   |   |
| width 70 mm   |   |
| depth 125 mm  |   |
| Connections/ Terminals  |   |
| product component removable terminal for auxiliary and No control circuit   |   |
| type of electrical connection   |   |
| **  | ne terminals  |
|   | /pe terminals   |
|   | /pe terminals   |
| arrangement of electrical connectors for main current Top and circuit   | DOLLOTT   |

| 2x (2.5 16 mm²)                                  |
|--|
| 2x (6 16 mm²), 2x (10 50 mm²), 1x (10 70 mm²)    |
| 2x (2,5 50 mm²), 1x (10 70 mm²)                  |
| 2x (2.5 35 mm²), 1x (2.5 50 mm²)                 |
| 2x (10 1/0), 1x (10 2/0)                         |
|  |
|  |
| 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)              |
| 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)              |
| 2x (20 16), 2x (18 14)                           |
|  |
| 4.5 6 N·m  |
| 19 m   |
|  |
| 4.5 6 N·m  |
| 0.8 1.2 N·m                                      |
| Hexagonal socket                                 |
| 4 mm hexagon socket                              |
|  |
| M8   |
| M3   |
|  |
|  |
| 20 a   |
|  |
| IP20   |
| finger-safe, for vertical contact from the front |
|  |
|  |
| Slide switch                                     |
|  |

## **General Product Approval**







Confirmation





For use in hazardous locations Test Certificates Marine / Shipping





Miscellaneous

Type Test Certificates/Test Report

Special Test Certificate



## Marine / Shipping













other Railway Environment

<u>Confirmation</u> <u>Special Test Certificate</u>



Environmental Confirmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2146-4JB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2146-4JB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2146-4JB0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2146-4JB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2146-4JB0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2146-4JB0&objecttype=14&gridview=view1

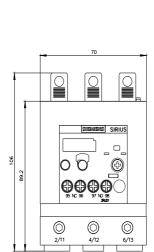

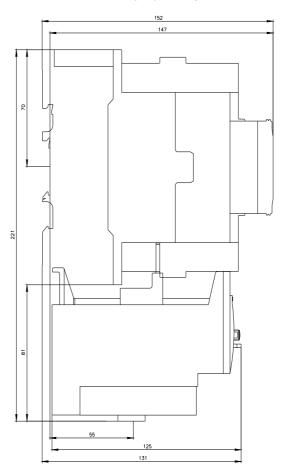

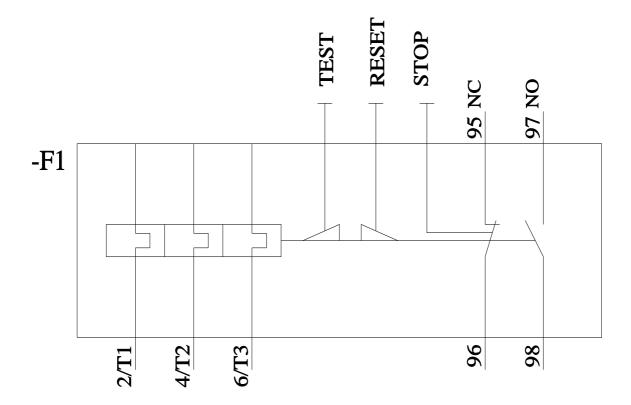

last modified: 6/3/2024 🖸