SIEMENS

product brand name

Data sheet 3RW5215-1AC04

SIRIUS



SIRIUS soft starter 200-480 V 25 A, 24 V AC/DC Screw terminals Analog output



product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS00
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3RV2032-4EA10; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3RV2032-4EA10; Type of coordination 1, Iq = 15 kA, CLASS 10
 of circuit breaker usable at 400 V at inside-delta circuit 	3RV2032-4VA10; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V at inside-delta circuit 	3RV2032-4VA10; Type of coordination 1, Iq = 15 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3822-6; Type of coordination 1, Iq = 65 kA
 of the gG fuse usable at inside-delta circuit up to 500 V 	3NA3822-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1817-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE8021-1; Type of coordination 2, Iq = 65 kA
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
 is supported HMI-Standard 	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
buffering time in the event of power failure	

for main current circuit	100 ms
for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
 between main and auxiliary circuit 	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4 Diboron trioxide - 1303-86-2
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque	Yes
adjustable current limitation	Yes
pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Electronic motor overload protection
evaluation of thermistor motor protection	No
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
communication function constraint management value display	Yes
operating measured value display orrestleshook	Yes; Only in conjunction with special accessories
error logbookvia software parameterizable	Yes; Only in conjunction with special accessories No
via software parameterizable via software configurable	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication module
• firmware update	Yes
removable terminal for control circuit	Yes
torque control	No
analog output	Yes; 4 20 mA (default) / 0 10 V (parameterizable with High Feature HMI)
Power Electronics	
operational current	
at 40 °C rated value	25 A
at 50 °C rated value	22.3 A
• at 60 °C rated value	19.6 A
operational current at inside-delta circuit	
• at 40 °C rated value	43.3 A
• at 50 °C rated value	39 A
at 60 °C rated value	33.9 A
operating voltage	
• rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 % -10 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motorsat 230 V at 40 °C rated value	5.5 kW

at 220 V at incide dalla alculut at 40 00	44 144
• at 230 V at inside-delta circuit at 40 °C rated value	11 kW
• at 400 V at 40 °C rated value	11 kW
at 400 V at inside-delta circuit at 40 °C rated value	18.5 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
 at rotary coding switch on switch position 1 	11.5 A
 at rotary coding switch on switch position 2 	12.4 A
at rotary coding switch on switch position 3	13.3 A
at rotary coding switch on switch position 4	14.2 A
 at rotary coding switch on switch position 5 	15.1 A
 at rotary coding switch on switch position 6 	16 A
 at rotary coding switch on switch position 7 	16.9 A
 at rotary coding switch on switch position 8 	17.8 A
 at rotary coding switch on switch position 9 	18.7 A
at rotary coding switch on switch position 10	19.6 A
at rotary coding switch on switch position 11	20.5 A
at rotary coding switch on switch position 12	21.4 A
at rotary coding switch on switch position 13	22.3 A
 at rotary coding switch on switch position 14 	23.2 A
at rotary coding switch on switch position 15	24.1 A
 at rotary coding switch on switch position 16 	25 A
• minimum	11.5 A
adjustable motor current	
 for inside-delta circuit at rotary coding switch on switch position 1 	19.9 A
 for inside-delta circuit at rotary coding switch on switch position 2 	21.5 A
 for inside-delta circuit at rotary coding switch on switch position 3 	23 A
 for inside-delta circuit at rotary coding switch on switch position 4 	24.6 A
 for inside-delta circuit at rotary coding switch on switch position 5 	26.2 A
 for inside-delta circuit at rotary coding switch on switch position 6 	27.7 A
 for inside-delta circuit at rotary coding switch on switch position 7 	29.3 A
 for inside-delta circuit at rotary coding switch on switch position 8 	30.8 A
 for inside-delta circuit at rotary coding switch on switch position 9 	32.4 A
 for inside-delta circuit at rotary coding switch on switch position 10 	33.9 A
 for inside-delta circuit at rotary coding switch on switch position 11 	35.5 A
 for inside-delta circuit at rotary coding switch on switch position 12 	37.1 A
 for inside-delta circuit at rotary coding switch on switch position 13 	38.6 A
 for inside-delta circuit at rotary coding switch on switch position 14 	40.2 A
 for inside-delta circuit at rotary coding switch on switch position 15 	41.7 A
 for inside-delta circuit at rotary coding switch on switch position 16 	43.3 A
at inside-delta circuit minimum	19.9 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	20 W
• at 50 °C after startup	19 W
at 60 °C after startup	18 W
power loss [W] at AC at current limitation 350 %	
at 40 °C during startup	376 W

• at 50 °C during startup	318 W
at 60 °C during startup at 60 °C during startup	278 W
Control circuit/ Control	
	AC/DC
type of voltage of the control supply voltage control supply voltage at AC	ACIDO
• at 50 Hz rated value	24 V
	24 V
at 60 Hz rated value	
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage at DC	
rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	360 mA
inrush current by closing the bypass contacts maximum	0.75 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of the overvoltage protection	
design of the overvoltage protection design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of
design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
design of short-circuit protection for control circuit Inputs/ Outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs number of digital inputs onto parameterizable	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3
Inputs/ Outputs number of digital inputs onto parameterizable	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
Inputs/ Outputs number of digital inputs number of digital outputs onto parameterizable digital output version number of analog outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 0 mm 100 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards • downwards	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 100 mm 75 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards • downwards • at the side	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 100 mm 75 mm 5 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards • downwards • at the side weight without packaging Connections/ Terminals	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 100 mm 75 mm 5 mm
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards • downwards • at the side weight without packaging	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 100 mm 75 mm 5 mm 2.1 kg
Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting • forwards • backwards • upwards • downwards • at the side weight without packaging Connections/ Terminals type of electrical connection	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 1 3 A 1 A +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface screw fixing 275 mm 170 mm 152 mm 10 mm 0 mm 100 mm 75 mm 5 mm

type of connectable conductor cross-sections	
• for main contacts	2v /4 0 2 5 mm²\ 2v /2 5 40 mm²\
— solid	2x (1.0 2.5 mm²), 2x (2.5 10 mm²)
— finely stranded with core end processing	2x (1.0 2.5 mm²), 2x (2.5 6.0 mm²)
for AWG cables for main current circuit solid type of connectable conductor areas postions	2x (16 12), 2x (14 8)
type of connectable conductor cross-sections	1v /0 F
for control circuit finally stranded with core and processing.	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
for control circuit finely stranded with core end processing for AWC cobles for control circuit solid.	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
for AWG cables for control circuit solid wire length	1x (20 12), 2x (20 14)
between soft starter and motor maximum	800 m
at the digital inputs at AC maximum	100 m
	1 000 m
at the digital inputs at DC maximum tightening torque	1 000 111
for main contacts with screw-type terminals	2 2.5 N·m
for auxiliary and control contacts with screw-type	0.8 1.2 N·m
terminals	U.O 1.2 N'III
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	18 22 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get
• during storage according to 120 00721	inside the devices), 1M4
 during transport according to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	
Siemens Eco Profile (SEP)	Siemens EcoTech
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
 of circuit breaker usable for Standard Faults 	
— at 460/480 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; lq = 5 kA
— 60/480 V according to UL	Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; lq max = 65 kA
— at 460/480 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
 — 60/480 V at inside-delta circuit according to UL 	Siemens type: 3VA51, max. 60 A; lq max = 65 kA
— at 575/600 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
— at 575/600 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA
of the fuse	
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 100 A; Iq = 5 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 100 A; Iq = 100 kA
 usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 100 A; Iq = 5 kA
 usable for High Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class J / L, max. 100 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	5 hp
 at 220/230 V at 50 °C rated value 	7.5 hp

15 hp • at 460/480 V at 50 °C rated value • at 200/208 V at inside-delta circuit at 50 °C rated value 10 hp • at 220/230 V at inside-delta circuit at 50 °C rated value 10 hp • at 460/480 V at inside-delta circuit at 50 °C rated value 25 hp R300-B300 contact rating of auxiliary contacts according to UL **Electrical Safety** protection class IP on the front according to IEC 60529 IP20 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

Approvals Certificates

General Product Approval







Confirmation





EMV **Test Certificates** Marine / Shipping



<u>KC</u>

Type Test Certificates/Test Report







Marine / Shipping other **Environment**



Confirmation





Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5215-1AC04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5215-1AC04

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RW5215-1AC0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5215-1AC04&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5215-1AC04/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5215-1AC04&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

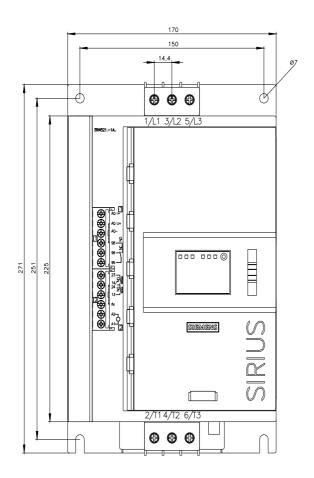

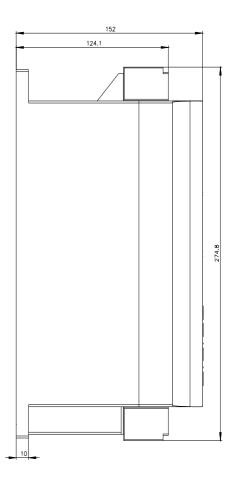

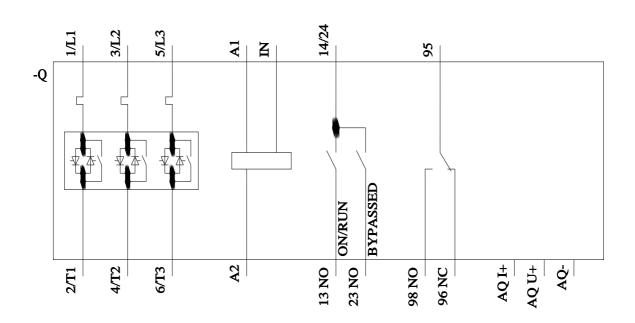

last modified: 4/19/2024 🖸

