SIEMENS

product brand name

product category

Data sheet 3RW5516-1HA14

SIRIUS

Hybrid switching devices



SIRIUS soft starter 200-480 V 32 A, 110-250 V AC Screw terminals





F	
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
of high feature HMI module usable	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3RV2032-4VA10; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3RV2032-4VA10; Type of coordination 1, Iq = 10 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3RV2032-4JA10; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 500 V at inside-delta circuit	3RV2032-4JA10; Type of coordination 1, Iq = 10 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3824-6; Type of coordination 1, Iq = 65 kA
• of the gG fuse usable at inside-delta circuit up to 500 V	3NA3824-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1818-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE8022-1; Type of coordination 2, Iq = 65 kA
eneral technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
UL approval	Yes

a CSA approval	Voc
CSA approval	Yes
product component	V
HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4 Diboron trioxide - 1303-86-2 Lead titanium trioxide - 12060-00-3
product function	
ramp-up (soft starting)	Yes
ramp-down (soft stop)	Yes
 breakaway pulse 	Yes
 adjustable current limitation 	Yes
 creep speed in both directions of rotation 	Yes
 pump ramp down 	Yes
DC braking	Van
 motor heating 	Yes
min/max pointer	Yes
trace function	
intrinsic device protection	Yes
	Yes Yes
motor overload protection	Yes Yes Yes
·	Yes Yes Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to
motor overload protection	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
motor overload protectionevaluation of thermistor motor protection	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick
 motor overload protection evaluation of thermistor motor protection inside-delta circuit 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display 	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes Yes Yes Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook via software parameterizable 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook via software parameterizable via software configurable screw terminal 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook via software parameterizable via software configurable 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
 motor overload protection evaluation of thermistor motor protection inside-delta circuit auto-RESET manual RESET remote reset communication function operating measured value display event list error logbook via software parameterizable via software configurable screw terminal spring-loaded terminal 	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes

voltage ramp	Yes
torque control	Yes
combined braking	Yes
analog output	Yes; 4 20 mA (default) / 0 10 V
 programmable control inputs/outputs 	Yes
 condition monitoring 	Yes
 automatic parameterisation 	Yes
application wizards	Yes
 alternative run-down 	Yes
 emergency operation mode 	Yes
 reversing operation 	Yes
 soft starting at heavy starting conditions 	Yes
Power Electronics	
operational current	
 at 40 °C rated value 	32 A
 at 40 °C rated value minimum 	6.5 A
 at 50 °C rated value 	28.4 A
 at 60 °C rated value 	26 A
operational current at inside-delta circuit	
• at 40 °C rated value	55.4 A
• at 50 °C rated value	49 A
• at 60 °C rated value	45 A
operating voltage	
• rated value	200 480 V
 at inside-delta circuit rated value 	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at	-15 %
relative positive tolerance of the operating voltage at	10 %
inside-delta circuit	
operating power for 3-phase motors	
at 230 V at 40 °C rated value	7.5 kW
 at 230 V at inside-delta circuit at 40 °C rated value 	15 kW
• at 400 V at 40 °C rated value	15 kW
at 400 V at inside-delta circuit at 40 °C rated value	22 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	10 W
• at 50 °C after startup	9 W
• at 60 °C after startup	8 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	519 W
at 50 °C during startup	437 W
at 60 °C during startup	386 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	10
type of voltage of the control supply voltage	AC
control supply voltage at AC	440 0501/
• at 50 Hz	110 250 V
• at 60 Hz relative negative tolerance of the control supply voltage at	-15 %
AC at 50 Hz relative positive tolerance of the control supply voltage at	10 %
AC at 50 Hz relative negative tolerance of the control supply voltage at	-15 %
AC at 60 Hz relative positive tolerance of the control supply voltage at	10 %
relative positive tolerance of the control supply voltage at	

AC at 60 Hz	
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	165 mA
inrush current by closing the bypass contacts maximum	0.2 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
 number of digital outputs 	4
 number of digital outputs parameterizable 	3
 number of digital outputs not parameterizable 	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	275 mm
width	170 mm
depth	152 mm
required spacing with side-by-side mounting	102 111111
forwards	10 mm
backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	2.6 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for control circuit	screw-type terminals
wire length for thermistor connection	
 with conductor cross-section = 0.5 mm² maximum 	50 m
 with conductor cross-section = 1.5 mm² maximum 	150 m
 with conductor cross-section = 2.5 mm² maximum 	250 m
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.0 2.5 mm²), 2x (2.5 10 mm²)
 finely stranded with core end processing 	2x (1.0 2.5 mm²), 2x (2.5 6.0 mm²)
• for AWG cables for main current circuit solid	2x (16 12), 2x (14 8)
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
for control circuit finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
for AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	, , , ,
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
- at the digital inputs at DO maximum	1 000 111

tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary and control contacts with screw-type terminals 	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	18 22 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
 during operation 	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2
during a standard paradia a ta IFO 00704	(sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
 during transport according to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	
Siemens Eco Profile (SEP)	Siemens EcoTech
EMC emitted interference	acc. to IEC 60947-4-2: Class A, Class B on request
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
PROFINET high-feature	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
• PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
 of circuit breaker usable for Standard Faults 	
— at 460/480 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
— 60/480 V according to UL	Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; Iq max = 65 kA
- at 460/480 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
- 60/480 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; Iq max = 65 kA
— at 575/600 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
- 75/600 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; Iq max = 65 kA
— at 575/600 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
• of the fuse	
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 125 A; Iq = 5 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 125 A; Iq = 100 kA
usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class RK5 / K5, max. 125 A; lq = 5 kA
usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 125 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
at 200/208 V at 50 °C rated value	7.5 hp
• at 220/230 V at 50 °C rated value	10 hp
• at 460/480 V at 50 °C rated value	20 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value	15 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value	15 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	30 hp
contact rating of auxiliary contacts according to UL	R300-B300
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
ATEX	
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1

PFHD with high demand rate according to IEC 61508 relating to ATEX	5E-7 1/h
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
hardware fault tolerance according to IEC 61508 relating to ATEX	0
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
 according to ATEX directive 2014/34/EU 	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]

Approvals Certificates

General Product Approval







Confirmation





EMV

For use in hazardous locations

Test Certificates

Marine / Shipping



<u>KC</u>





Type Test Certificates/Test Report



Marine / Shipping









other



Environment





Environment

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5516-1HA14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5516-1HA14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-1HA14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5516-1HA14&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-1HA14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5516-1HA14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

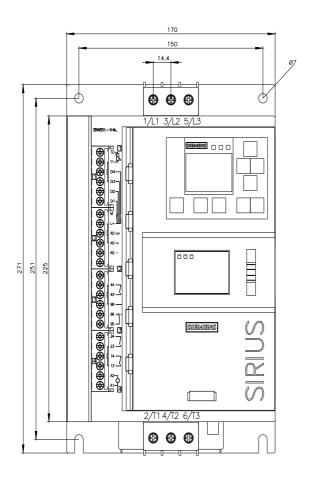

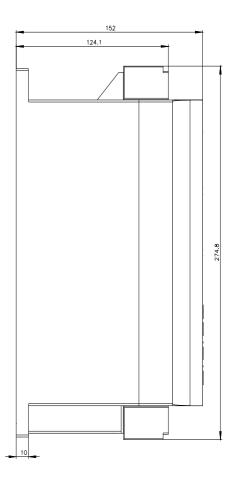

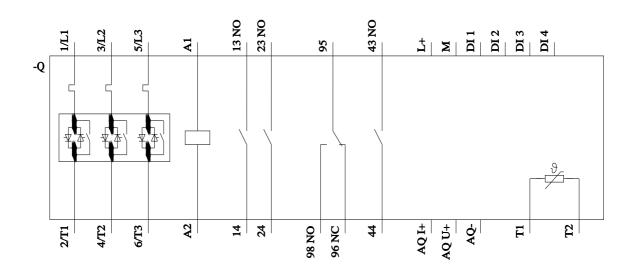

last modified: 6/6/2024 🖸

