# **SIEMENS**

product brand name

product category product designation

Data sheet 3RW5517-1HA14

SIRIUS

Soft starter

Hybrid switching devices



SIRIUS soft starter 200-480 V 38 A, 110-250 V AC Screw terminals





p	out ctarto.
product type designation	3RW55
manufacturer's article number	
of high feature HMI module usable	<u>3RW5980-0HF00</u>
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3RV2032-4WA10; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3RV2032-4WA10; Type of coordination 1, Iq = 10 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3RV2032-4RA10; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 500 V at inside-delta circuit	3RV2032-4RA10; Type of coordination 1, Iq = 10 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	3NA3824-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	3NA3824-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1820-0; Type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE8024-1; Type of coordination 2, Iq = 65 kA
eneral technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
UL approval	Yes

a CSA approval	Voc
CSA approval	Yes
product component	V
HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4 Diboron trioxide - 1303-86-2 Lead titanium trioxide - 12060-00-3
product function	
<ul><li>ramp-up (soft starting)</li></ul>	Yes
<ul><li>ramp-down (soft stop)</li></ul>	Yes
<ul> <li>breakaway pulse</li> </ul>	Yes
<ul> <li>adjustable current limitation</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> </ul>	Yes
<ul> <li>pump ramp down</li> </ul>	Yes
DC braking	Van
<ul> <li>motor heating</li> </ul>	Yes
min/max pointer	Yes
• trace function	
intrinsic device protection	Yes
	Yes Yes
motor overload protection	Yes Yes Yes
·	Yes Yes Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to
motor overload protection	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
<ul><li>motor overload protection</li><li>evaluation of thermistor motor protection</li></ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> </ul>	Yes Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes Yes Yes Yes Yes Yes Yes Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> <li>via software configurable</li> <li>screw terminal</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> <li>via software configurable</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes
<ul> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> <li>via software configurable</li> <li>screw terminal</li> <li>spring-loaded terminal</li> </ul>	Yes Yes Yes Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. Yes; Type A PTC or Klixon / Thermoclick Yes

voltage ramp	Yes
• torque control	Yes
<ul> <li>combined braking</li> </ul>	Yes
analog output	Yes; 4 20 mA (default) / 0 10 V
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes
<ul> <li>condition monitoring</li> </ul>	Yes
<ul> <li>automatic parameterisation</li> </ul>	Yes
<ul><li>application wizards</li></ul>	Yes
alternative run-down	Yes
<ul> <li>emergency operation mode</li> </ul>	Yes
reversing operation	Yes
soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
<ul> <li>at 40 °C rated value</li> </ul>	38 A
<ul> <li>at 40 °C rated value minimum</li> </ul>	7.5 A
<ul> <li>at 50 °C rated value</li> </ul>	33.5 A
<ul> <li>at 60 °C rated value</li> </ul>	30.5 A
operational current at inside-delta circuit	
• at 40 °C rated value	65.8 A
• at 50 °C rated value	58 A
• at 60 °C rated value	52.8 A
operating voltage	
• rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at	-15 %
inside-delta circuit	
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
<ul> <li>at 230 V at 40 °C rated value</li> </ul>	11 kW
<ul> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	18.5 kW
<ul> <li>at 400 V at 40 °C rated value</li> </ul>	18.5 kW
at 400 V at inside-delta circuit at 40 °C rated value	30 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	11 W
• at 50 °C after startup	10 W
at 60 °C after startup	9 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	616 W
at 50 °C during startup	511 W
• at 60 °C during startup	447 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz	110 250 V
• at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at	10 %

AC at 60 Hz	
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	165 mA
inrush current by closing the bypass contacts maximum	0.2 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
<ul> <li>number of digital outputs</li> </ul>	4
<ul> <li>number of digital outputs parameterizable</li> </ul>	3
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	275 mm
width	170 mm
depth	152 mm
required spacing with side-by-side mounting	102 111111
forwards	10 mm
backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	2.6 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for control circuit	screw-type terminals
wire length for thermistor connection	
<ul> <li>with conductor cross-section = 0.5 mm² maximum</li> </ul>	50 m
<ul> <li>with conductor cross-section = 1.5 mm² maximum</li> </ul>	150 m
<ul> <li>with conductor cross-section = 2.5 mm² maximum</li> </ul>	250 m
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.0 2.5 mm²), 2x (2.5 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1.0 2.5 mm²), 2x (2.5 6.0 mm²)
• for AWG cables for main current circuit solid	2x (16 12), 2x (14 8)
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
for control circuit finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
for AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	, , , ,
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
- at the digital inputs at DO maximum	1 000 111

tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	18 22 lbf-in
for auxiliary and control contacts with screw-type	7 10.3 lbf-in
terminals	7 10.0 lbf iii
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2
	(sand must not get into the devices), 3M6
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get
<ul> <li>during transport according to IEC 60721</li> </ul>	inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	E. C., 201, 201, 2012 (HIAA. IAII HEIGHT V.O III)
Siemens Eco Profile (SEP)	Siemens EcoTech
EMC emitted interference	acc. to IEC 60947-4-2: Class A, Class B on request
Communication/ Protocol	2. Oldso 7, Oldso B off Equest
communication module is supported	
PROFINET standard	Yes
PROFINET standard     PROFINET high-feature	Yes
EtherNet/IP	Yes
	Yes
Modbus RTU     Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	Tes
manufacturer's article number	
of circuit breaker usable for Standard Faults	Oissess have a ODV/0740 area, 70 A as 0V/AF4 area, 405 A. In. E.I.A
— at 460/480 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
— 60/480 V according to UL	Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; Iq max = 65 kA
— at 460/480 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; lq = 5 kA
— 60/480 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; lq max = 65 kA
— at 575/600 V according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; lq = 5 kA
— 75/600 V at inside-delta circuit according to UL	Siemens type: 3VA51, max. 60 A; lq max = 65 kA
— at 575/600 V at inside-delta circuit according to UL	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
of the fuse      vestels for Standard Faults up to E75/000 \/	Type: Class DI/E //E may 450 A. L. 51.A
<ul> <li>usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class RK5 / K5, max. 150 A; Iq = 5 kA
<ul> <li>usable for High Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 150 A; Iq = 100 kA
<ul> <li>usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class RK5 / K5, max. 150 A; Iq = 5 kA
usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 150 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
at 200/208 V at 50 °C rated value	10 hp
• at 220/230 V at 50 °C rated value	10 hp
• at 460/480 V at 50 °C rated value	20 hp
at 200/208 V at inside-delta circuit at 50 °C rated value	15 hp
at 220/230 V at inside-delta circuit at 50 °C rated value	20 hp
at 460/480 V at inside-delta circuit at 50 °C rated value	40 hp
contact rating of auxiliary contacts according to UL	R300-B300
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
ATEX	<u> </u>
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1

PFHD with high demand rate according to IEC 61508 relating to ATEX	5E-7 1/h
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
hardware fault tolerance according to IEC 61508 relating to ATEX	0
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]

#### Approvals Certificates

#### **General Product Approval**







Confirmation





EMV

For use in hazardous locations

**Test Certificates** 

Marine / Shipping



<u>KC</u>







Type Test Certificates/Test Report



Marine / Shipping





LRS



Confirmation

other



**Environment** 





## Environment

Environmental Confirmations

### Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5517-1HA14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5517-1HA14

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RW5517-1HA14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5517-1HA14\&lang=en}}$ 

Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5517-1HA14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5517-1HA14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

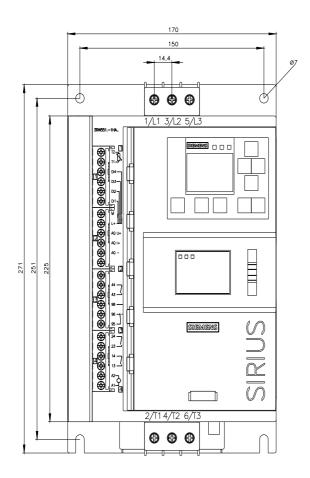

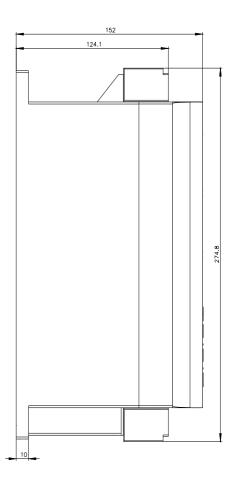

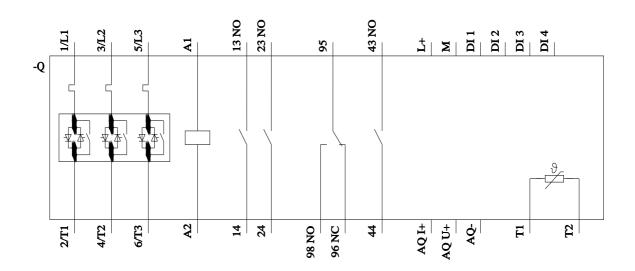

last modified: 6/6/2024 🖸

