

3.5 Type designation key

The type designation contains information on the inverter. The user can find the type designation on the type designation label attached to the inverter or the simple name plate.

GD200A-011G/015P-4

A B C D E F

Fig 3-4 Product type

| Key | Instructions | | | | | |
|------|---|--|--|--|--|--|
| A | GD200A : abbreviation of Gooddrive200A | | | | | |
| B, D | 3-digit code: output power. "R" means the decimal point; "011":11kW; "015":15kW | | | | | |
| C, E | C G:Constant torque load E P:Variable torque load | | | | | |
| F | Input voltage degree: 2: AC 3PH 220V(-15%)~240V(+10%) 4: AC 3PH 380V(-15%)~ 440V(+10%) 6: AC 3PH 520V(-15%)~690V(+10%) | | | | | |

3.6 Rated specifications

| Model | Constant torque | | | Variable torque | | |
|---------------------|-------------------|-------------------|--------------------|-------------------|-------------------|--------------------|
| | Output power (kW) | Input current (A) | Output current (A) | Output power (kW) | Input current (A) | Output current (A) |
| GD200A-0R7G-4 | 0.75 | 3.4 | 2.5 | | | |
| GD200A -1R5G-4 | 1.5 | 5.0 | 3.7 | | | |
| GD200A -2R2G-4 | 2.2 | 5.8 | 5 | | | |
| GD200A -004G/5R5P-4 | 4 | 13.5 | 9.5 | 5.5 | 19.5 | 14 |
| GD200A -5R5G/7R5P-4 | 5.5 | 19.5 | 14 | 7.5 | 25 | 18.5 |
| GD200A -7R5G/011P-4 | 7.5 | 25 | 18.5 | 11 | 32 | 25 |
| GD200A -011G/015P-4 | 11 | 32 | 25 | 15 | 40 | 32 |
| GD200A -015G/018P-4 | 15 | 40 | 32 | 18.5 | 47 | 38 |
| GD200A -018G/022P-4 | 18.5 | 47 | 38 | 22 | 56 | 45 |
| GD200A -022G/030P-4 | 22 | 56 | 45 | 30 | 70 | 60 |
| GD200A -030G/037P-4 | 30 | 70 | 60 | 37 | 80 | 75 |
| GD200A -037G/045P-4 | 37 | 80 | 75 | 45 | 94 | 92 |
| GD200A -045G/055P-4 | 45 | 94 | 92 | 55 | 128 | 115 |
| GD200A -055G/075P-4 | 55 | 128 | 115 | 75 | 160 | 150 |
| GD200A -075G/090P-4 | 75 | 160 | 150 | 90 | 190 | 180 |
| GD200A -090G/110P-4 | 90 | 190 | 180 | 110 | 225 | 215 |
| GD200A -110G/132P-4 | 110 | 225 | 215 | 132 | 265 | 260 |

| Model | Constant torque | | | Variable torque | | |
|---------------------|-------------------|-------------------|--------------------|-------------------|-------------------|--------------------|
| | Output power (kW) | Input current (A) | Output current (A) | Output power (kW) | Input current (A) | Output current (A) |
| GD200A -132G/160P-4 | 132 | 265 | 260 | 160 | 310 | 305 |
| GD200A -160G/185P-4 | 160 | 310 | 305 | 185 | 345 | 340 |
| GD200A -185G/200P-4 | 185 | 345 | 340 | 200 | 385 | 380 |
| GD200A -200G/220P-4 | 200 | 385 | 380 | 220 | 430 | 425 |
| GD200A -220G/250P-4 | 220 | 430 | 425 | 250 | 485 | 480 |
| GD200A -250G/280P-4 | 250 | 485 | 480 | 280 | 545 | 530 |
| GD200A -280G/315P-4 | 280 | 545 | 530 | 315 | 610 | 600 |
| GD200A -315G/350P-4 | 315 | 610 | 600 | 350 | 625 | 650 |
| GD200A -350G/400P-4 | 350 | 625 | 650 | 400 | 715 | 720 |
| GD200A -400G-4 | 400 | 715 | 720 | | | |
| GD200A -500G-4 | 500 | 890 | 860 | | | |

Note:

1. The input current of 1.5~315kW inverters is measured when the input voltage is 380V and no DC reactor and input/output reactor.
2. The input current of 350~500kW inverters is measured when the input voltage is 380V and the circuit is with input reactor.
3. The rated output current is defined as the output current when the output voltage is 380V.
4. In the allowable voltage range, the output power and current can not exceed the rated output power and current in any situation.

3.7 Structure diagram

Below is the layout figure of the inverter (take the inverter of 30kW as the example).

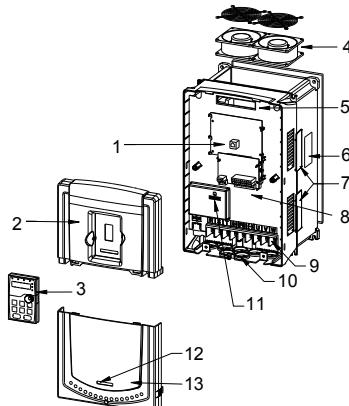


Fig 3-5 Product structure diagram