Specifications



Multifunction Timer Relay - 24VDC/ 24..240 V AC - 2 C/O

RE22R2MMU

Main

| Range of product | Harmony Timer Relays |
|---------------------------|----------------------|
| Discrete output type | Relay |
| Product or component type | Modular timing relay |
| Device short name | RE22 |
| nominal output current | 8 A |

Complementary

| Contacts type and composition | 1 C/O timed contact 1 C/O timed or instantaneous contact |
|--------------------------------|---|
| time delay type | Power on-delay On-delay and off-delay Interval Off-delay Symmetrical flashing |
| time delay range | 10100 h 660 s 0.11 s 110 h 110 s 110 min 660 min |
| Control type | Rotary knob front panel |
| [Us] rated supply voltage | 24240 V AC 24 V DC |
| Voltage range | 0.851.1 Us |
| Supply frequency | 5060 Hz +/- 5 % |
| Connections - terminals | Screw terminals, 2 x 1.5 mm ² with cable end Screw terminals, 2 x 2.5 mm ² without cable end |
| Tightening torque | 0.61 N.m conforming to IEC 60947-1 |
| Housing material | Self-extinguishing |
| Repeat accuracy | +/- 0.5 % conforming to IEC 61812-1 |
| Temperature drift | +/- 0.05 %/°C |
| Voltage drift | +/- 0.2 %/V |
| Setting accuracy of time delay | +/- 10 % of full scale at 25 °C conforming to IEC 61812-1 |

| Power on-delay - A- Power on-delay relay On-delay and off-delay - Ac- On-delay and off-delay relay w/ control signal Power on-delay - At- Power on-delay relay w/ pause/summation (Y1) Interval - B- Single interval relay w/ control signal Interval - Bw- Double interval relay w/ control signal Off-delay - C- Off-delay relay w/ control signal Symmetrical flashing - D- Symmetrical flashing relay (starting pulse-off) Symmetrical flashing - Di- Symmetrical flashing relay (starting pulse-on) Interval - H- Interval relay Interval - Ht- Interval relay w/ pause/summation (Y1) |
|--|
| 30 ms 100 ms under load |
| 100 MOhm at 500 V DC conforming to IEC 60664-1 |
| 120 ms on de-energisation |
| 10 ms |
| 50 VA at 240 V AC |
| 0.7 W at 24 V DC |
| 2000 VA |
| 10 mA at 5 V |
| 8 mA |
| 250 V |
| 100000 cycles for resistive load, 8 A at 250 V, AC |
| 1000000 cycles |
| 5 kV for 1.250 μs conforming to IEC 60664-1 5 kV conforming to IEC 61812-1 |
| 100 ms |
| MTTFd = 182.6 years B10d = 170000 |
| Any position in relation to normal vertical mounting plane |
| 35 mm DIN rail conforming to IEC 60715 |
| LED green (flashing) for timing in progress LED green (steady) for power ON LED yellow for relay energised |
| A- Power on-delay relay-2 C/O Ac- On-delay and off-delay relay w/ control signal-2 C/O At- Power on-delay relay w/ pause/summation (Y1)-2 C/O B- Single interval relay w/ control signal-2 C/O Bw- Double interval relay w/ control signal-2 C/O C- Off-delay relay w/ control signal-2 C/O D- Symmetrical flashing relay (starting pulse-off)-2 C/O Di- Symmetrical flashing relay (starting pulse-on)-2 C/O H- Interval relay-2 C/O Ht- Interval relay w/ pause/summation (Y1)-2 C/O |
| 22.5 mm |
| 0.09 kg |
| With test button |
| 10 |
| |

Environment

Dielectric strength

2.5 kV for 1 mA/1 minute at 50 Hz conforming to IEC 61812-1

| Standards | IEC 61812-1 |
|--|---|
| | IEC 61000-6-1 |
| | IEC 61000-6-2 |
| | IEC 61000-6-3 |
| | IEC 61000-6-4 |
| | |
| Directives | 2004/108/EC - electromagnetic compatibility |
| | 2006/95/EC - low voltage directive |
| Product certifications | cULus |
| | CSA |
| | CE |
| | CCC |
| | RCM |
| | GL |
| | EAC |
| | |
| Ambient air temperature for operation | -2060 °C |
| Ambient air temperature for storage | -3060 °C |
| IP degree of protection | IP40 housing: conforming to IEC 60529 |
| | IP20 terminal block: conforming to IEC 60529 |
| | IP40 front face: conforming to IEC 60529 |
| Vibration resistance | 20 m/s ² (f= 10150 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 15 gn for 11 ms conforming to IEC 60068-2-27 |
| Relative humidity | 93 %, without condensation conforming to IEC 60068-2-30 |
| Electromagnetic compatibility | Electrostatic discharge immunity test - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 |
| | Electrostatic discharge immunity test - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 |
| | Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4 |
| | Fast transients immunity test - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4 |
| | Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5 |
| | Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5 |
| | Radiated radio-frequency electromagnetic field immunity test - test level: 10 V level 3 (0.1580 MHz) conforming to IEC 61000-4-6 |
| | Electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz1 GHz) conforming to IEC 61000-4-3 |
| | Immunity to necosition-4-3 Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11 |
| | Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11 |
| | Conducted and radiated emissions class B conforming to EN 55022 |
| | |

Packing Units

| 0 | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 2.500 cm |
| Package 1 Width | 8.200 cm |
| Package 1 Length | 9.500 cm |
| Package 1 Weight | 105.000 g |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 40 |
| Package 2 Height | 15.000 cm |
| Package 2 Width | 30.000 cm |
| Package 2 Length | 40.000 cm |
| Package 2 Weight | 4.667 kg |

Contractual warranty


Warranty

18 months

4

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

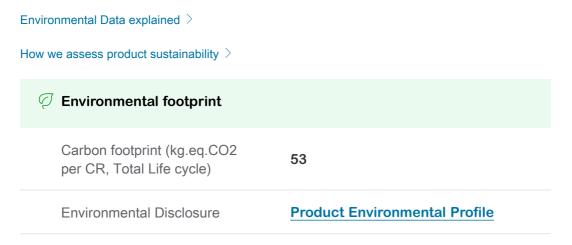

Use Better


| Materials and Substances | |
|--|--|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| SCIP Number | 7bdc2711-0ad2-427c-8ece-532c5e9f09d7 |
| REACh Regulation | REACh Declaration |
| China RoHS Regulation | China RoHS declaration |


Use Again

| ○ Repack and remanufacture | |
|----------------------------|-------------------------|
| Circularity Profile | End of Life Information |

Dimensions Drawings


Dimensions

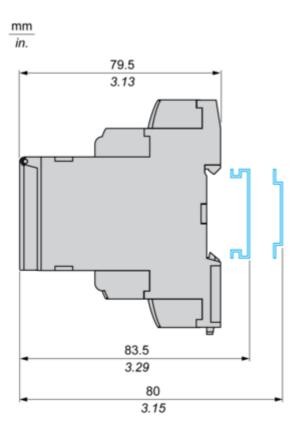

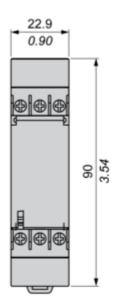


Connections and Schema

Internal Wiring Diagram



Wiring Diagram




Technical Description

Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

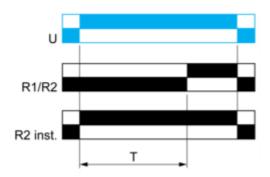


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function Ac : On- and Off-Delay Relay with Control Signal

Description

After power-up, closing of the control contact Y1 causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes. When control contact Y1 re-opens, the timing T starts.At the end of this timing period T

At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

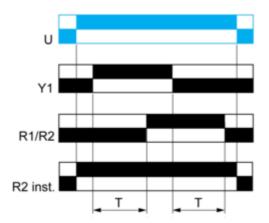


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

RE22R2MMU

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

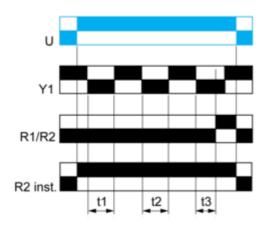


T = t1+t2+t3

Function B : Interval Relay with Control Signal

Description


After power-up, pulsing or maintaining control contact Y1 starts the timing T. The output relay closes for the duration of the timing period T then reverts to its initial state.

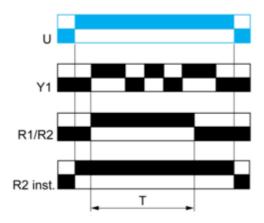

Function Bw : Double Interval Relay with Control Signal

Description


On closing and opening of control contact Y1, the output relay closes for the duration of the timing period T.

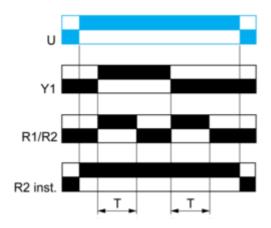

Function C : Off-Delay Relay with Control Signal

Description

After power-up and closing of the control contact Y1, the output relay closes. When control contact Y1 re-opens, timing T starts. At the end of the timing period, the output(s) relay revert(s) to its/their initial state.

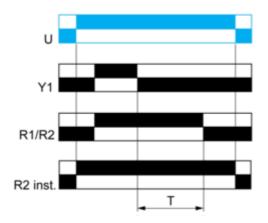


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

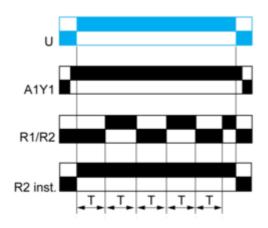


Before power-up Y1 should be permanently connected to A1. 2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

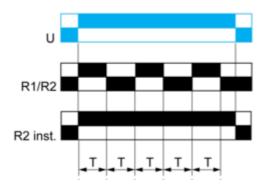


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay

Description

On energization of the relay, timing period T starts and the output(s) relay close(s). At the end of the timing period T, the output(s) relay revert(s) to its/their initial state

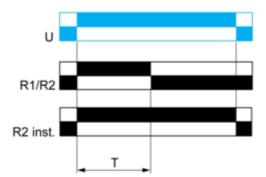

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

| Legend | | |
|-------------|--|--|
| | Relay de-energised | |
| | Relay energised | |
| Output open | | |
| | Output closed | |
| Y1 : | Control contact | |
| R1/R2 : | 2 timed outputs | |
| R2 inst. : | The second output is instantaneous if the right position is selected | |
| Т: | Timing period | |
| U : | Supply | |

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

Function: 1 Output






Function: 2 Outputs




T = t1 + t2 + ...

Function: 1 Output with Retrigger / Restart Control





Function: 2 Outputs with Retrigger / Restart Control





T = t1 + t2 +...

Technical Illustration

Dimensions

mm

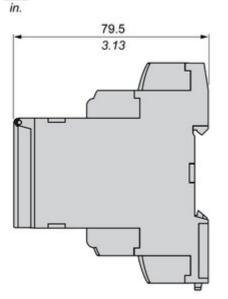

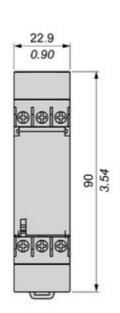

Offer Marketing Illustration

Product benefits / Features




Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative

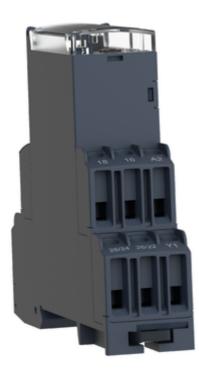



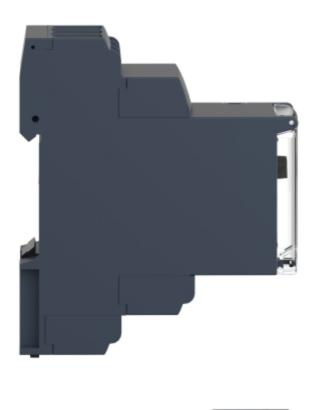








Image of product in real life situation

