

# XGFEC2525

Radio frequency identification XG, field expander universal type, Sn 26...150 mm, 250 x 250 x 10 mm



## Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part type	Field expander
Product specific application	Universal
Product compatibility	XGCS4901201 + XGHB440245 XGCS4901201 + XGHB90E340 XGCS4901201 + XGHB320246 XGCS4901201 + XGHB221346 XGCS4901201 + XGHB320345 XGCS4901201 + XGHB520246
Accessory / separate part destination	Station with associated label
[Sn] nominal sensing distance	26...150 mm

## Complementary

Accessory dimension	250 x 250 x 10 mm
---------------------	-------------------

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.000 cm
Package 1 Width	29.700 cm
Package 1 Length	30.000 cm
Package 1 Weight	542.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	4.039 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty


Warranty	18 months
----------	-----------

## Field Expanders



## Minimum Mounting Distances


### Distance Between Field Expanders

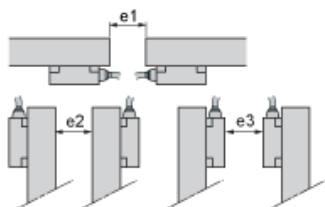

Tag	e1	e2	e3
XGHB90E340 XGHB520246	570	890	960
XGHB320345	720	1275	1200

## Minimum Mounting Distances in a Metal Structure


### Distance Between Field Expanders

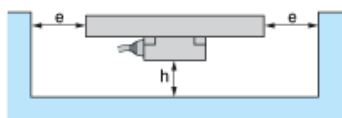

Field expanders	
e (mm)	h (mm)
0	75

## Curves


### Dialogue Zones for Field Expanders

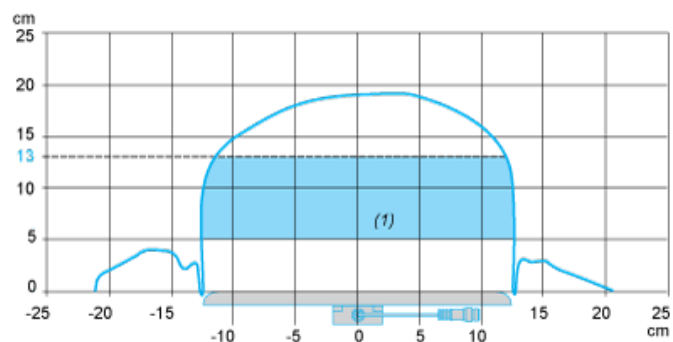

(1) Recommended working zone.

## Curves

### Dialogue Zones for Field Expanders

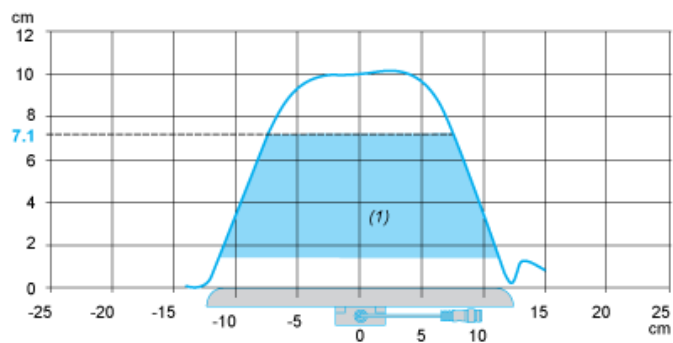

(1) Recommended working zone.