


[Home](#) > [Electrification](#) > [Automation & Control](#) > [Contactors](#) > [Contactors < 100A](#) > TAL9-30-01 77-143V DC Contactor



♥ [ADD TO WISH LIST](#)

Share with your friends

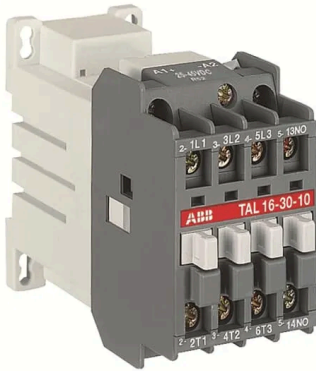

Automation & Control

Genuine products

Dedicated Support

Doorstep Delivery



eMart

TAL9-30-01 77-143V DC Contactor

₹1593.60 + ₹286.85 (GST 18%)

- 1 +

Buy Now

Add to Cart

Pin Code

Calculate Shipping

Please enter your PIN Code to check the best offers

Product Id#: 1SBL143061R6201

[Be the first to review this product](#)

Sold and delivered by **System Controls and Switchgears**

TAL 9 contactors are mainly used for controlling 3-phase motors and generally for controlling power circuits up to 690 V AC or 220 V DC. The contactors can also be used for many other applications such as isolation, capacitor switching, lighting. The TAL... series 1-stack 3-pole contactors are of the block type design. - Main poles and auxiliary contact blocks: 3 main poles, 1 built-in auxiliary contact, front and side-mounted add-on auxiliary contact blocks - Control circuit: DC operated with solid core magnet circuit. The polarity on the coil terminals (A1+ and A2-) must be respected - Accessories: a wide range of accessories is available. TAL... contactors are fitted with low consumption DC coils and offer a large coil voltage range.

Enquire Now



More about TAL9-30-01 77-143V DC Contactor

Technical Specification

MRP (Indian Rupees)	Not for Retail Sale
Compatibility	TAL Contactors
Max Mechanical Switching Frequency	3600 cycles per hour
Max Electrical Switching Frequency	AC-1 600 cycles per hour, AC-2 / AC-4 300 cycles per hour, AC-3 1200 cycles per hour
Conventional Free-air Thermal Current (Ith)	acc. to IEC 60947-5-1, q = 40 °C 16 ampere, acc. to IEC 60947-4-1, Open Contactors q = 40 °C 26 ampere
Coil Consumption	Holding DC (Umin / Umax) 2.5 / 8.5 watt, Pull-in DC (Umin / Umax) 2.5 / 8.5 watt
Terminal Type	Screw Terminals
Rated Operational Voltage	Auxiliary Circuit 690 volt, Main Circuit 690 volt
Operate Time	Between Coil De-energization and NC Contact Closing 16 ... 27 millisecond, Between Coil De-energization and NO Contact Opening 10 ... 17 millisecond, Between Coil Energization and NC Contact Opening 20 ... 70 millisecond, Between Coil Energization and NO
Rated Control Circuit Voltage (Uc)	DC Operation 77-143V
Rated Breaking Capacity AC-3 acc. to IEC 60947-4-1	8 x Ie AC-3
Rated Operational Power AC-3 (Pe)	(220 / 230 / 240 V) 2.2 KWT, (380 / 400 V) 4 KWT, (415 V) 4 KWT, (440 V) 4 KWT, (500 V) 5.5 KWT, (690 V) 5.5 KWT
Rated Operational Current DC-13 (Ie)	(125 V) 1.1 / 138 ampere, (24 V) 6 A / 144 watt, (250 V) 0.55 / 138 ampere, (48 V) 2.8 A / 134 watt, (72 V) 2 / 144 ampere
Rated Operational Current AC-3 (Ie)	(220 / 230 / 240 V) 55 °C 9 ampere, (380 / 400 V) 55 °C 9 ampere, (415 V) 55 °C 9 ampere, (440 V) 55 °C 9 ampere, (500 V) 55 °C 9 ampere, (690 V) 55 °C 7 ampere
Rated Operational Current AC-15 (Ie)	(220 / 240 V) 4 ampere, (24 / 127 V) 6 ampere, (380 / 440 V) 3 ampere, (500 V) 2 ampere, (690 V) 2 ampere
Rated Operational Current AC-1 (Ie)	(690 V) 40 °C 25 ampere, (690 V) 55 °C 22 ampere, (690 V) 70 °C 18 ampere
Rated Making Capacity AC-3 acc. to IEC 60947-4-1	10 x Ie AC-3
Rated Frequency Limits	25 ... 400 hertz
Rated Frequency (f)	Supply Circuit 50 60 hertz
Package Width	86 millimetre
Package Length	141 millimetre
Package Height	51 millimetre

Enquire Now

Invoice Description	TAL9-30-01 77-143V DC Contactor
Product Range	TAL Contactors
Package Gross Weight	0.52 kilogram
Extended Product Type	TAL9-30-01 77-143V DC
Number of Aux Contacts NC	1
Ambient Air Temperature	Close to Contactor for Storage -60 ... +80 degree Celsius, Close to Contactor without Thermal O/L Relay -40 ... +55 degree Celsius, Close to Contactor Fitted with Thermal O/L Relay -25 ... +55 degree Celsius
Rated Insulation Voltage (Ui)	acc. to UL/CSA 600 volt, acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 volt
Product Class	Block Contactors
Total GST Percentage	18.00
HSN Number	85364900
Country of origin	Bulgaria (BG) - Imported by ABB India Limited

[Download](#)

[Offers](#)

[Reviews](#)

Enquire Now

Recently Viewed

 <p>TAL12-30-10 77-143V DC Contactor 1SBL163061R6210 Out of Stock</p>	 <p>TAL26-30-10 77-143V DC Contactor 1SBL243061R6210 ₹1,998.26</p>	 <p>TAL30-30-10 77-143V DC Contactor 1SBL283061R6210 Out of Stock</p>	 <p>TAL40-30-10 77-143V DC Contactor 1SBL323061R6210 ₹4,383.68</p>
---	---	--	---

☐ [Write to Us](#)

1800 420 0707

@ contactabb.in@abb.com
(Only for India Inquiries)

Disha - Plot No.5 & 6, 2nd Stage, Peenya
Industrial Area IV, Peenya 560058,

COMPANY



AboutSell Our
Us With Sellers
Us

INFORMATION

BlogsExchange and
Returns Policy
Privacy Terms
Policy of Use
How to create a
Company Account
FAQ

PAYMENT METHODS

Bangalore, Karnataka, India.

 [Facebook](#)  [Twitter](#)

 [LinkedIn](#)  [Youtube](#)

Copyright © 2025 ABB India Ltd. | Address: Disha - Plot No.5 & 6, 2nd Stage, Peenya Industrial Area IV, Peenya 560058, Bangalore, Karnataka, India.

Enquire Now

