


Product datasheet

Specifications

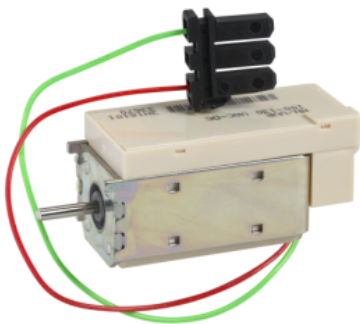

MN undervoltage release, Compact NS 630b to Compact NS 3200, 48 VDC to 60 VDC, 48 VAC 50/60 Hz

33669

Main

Range	ComPacT
Range of product	ComPacT NS630b...1600 new generation ComPacT NS1600b...3200 new generation
Device short name	MN
Product or component type	Voltage release
Device application	Control
Voltage release type	Opening coil Undervoltage release
Control type	Standard
[Uc] control circuit voltage	48 V AC 50/60 Hz 48...60 V DC
Circuit breaker mounting mode	Fixed
Range compatibility	ComPact ComPact NS630b...1600 ComPact ComPact NS1600b...3200

Complementary

Operating threshold	0.35...0.7 x Un opening 0.85 x Un closing
Response time	90 ms +/- 5 % for Compact NS630b...1600 90 ms +/- 5 % for Compact NS1600b...3200 40 ms +/- 5 % for MasterPact NT 90 ms +/- 5 % for MasterPact NW
Supply holding power	4.5 VA
Accessory / separate part category	Spare part for MasterPact NT Spare part for MasterPact NW Spare part for ComPacT NS630b...1600 new generation Spare part for ComPacT NS1600b...3200 new generation

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.4 cm
Package 1 Width	6.2 cm
Package 1 Length	8.3 cm
Package 1 Weight	151.0 g
Unit Type of Package 2	BB1

Number of Units in Package 2	10
Package 2 Height	9.0 cm
Package 2 Width	13.2 cm
Package 2 Length	18.5 cm
Package 2 Weight	1.554 kg
Unit Type of Package 3	S03
Number of Units in Package 3	60
Package 3 Height	30.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	9.747 kg

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)