



Figure similar

SITOR fuse link, with female thread on both sides, In: 710 A, aR, Un AC: 800 V, Un DC: 440 V, front indicator

| Model | | | |
|--|--|--|-------|
| product brand name | | SETRON | |
| product designation | | SITOR fuse link | |
| design of the product | | With female thread on both sides | |
| design of an identification indicator | | front indicator | |
| design of the switching contact | | with female thread at both ends for SITOR 6QG12 thyristor sets | |
| design of the fuse link | | Fuses for special applications | |
| General technical data | | | |
| size of fuse system according to EN 60269-1 | | others | |
| operating class of the fuse link | | aR | |
| varying load factor (WL) | | 0.95 | |
| type of voltage of the operating voltage | | AC/DC | |
| Supply voltage | | | |
| supply voltage | | | |
| • at AC | | 800 V | |
| • at DC | | 440 V | |
| Breaking Capacity | | | |
| switching capacity current | | | |
| • according to IEC 60947-2 rated value | | 100 kA | |
| Dissipation | | | |
| power loss [W] | | 155 W | |
| power loss [W] | | | |
| • for rated value of the current at AC in hot operating state per pole | | 155 W | |
| • maximum | | 155 W | |
| Product details | | | |
| product description | | with female thread on both sides, silver-plated | |
| accessories included | | no | |
| Mechanical Design | | | |
| mounting position | | Any, preferably vertical | |
| net weight | | 687 g | |
| Environmental conditions | | | |
| ambient temperature during operation | | | |
| • minimum | | -20 °C | |
| • maximum | | 50 °C | |
| environmental category | | -20 to +50 at 95% relative humidity | |
| Approvals Certificates | | | |
| General Product Approval | | Test Certificates | other |

| | |
|-------|-------------|
| other | Environment |
|-------|-------------|

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE4337-6>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NE4337-6>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE4337-6

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

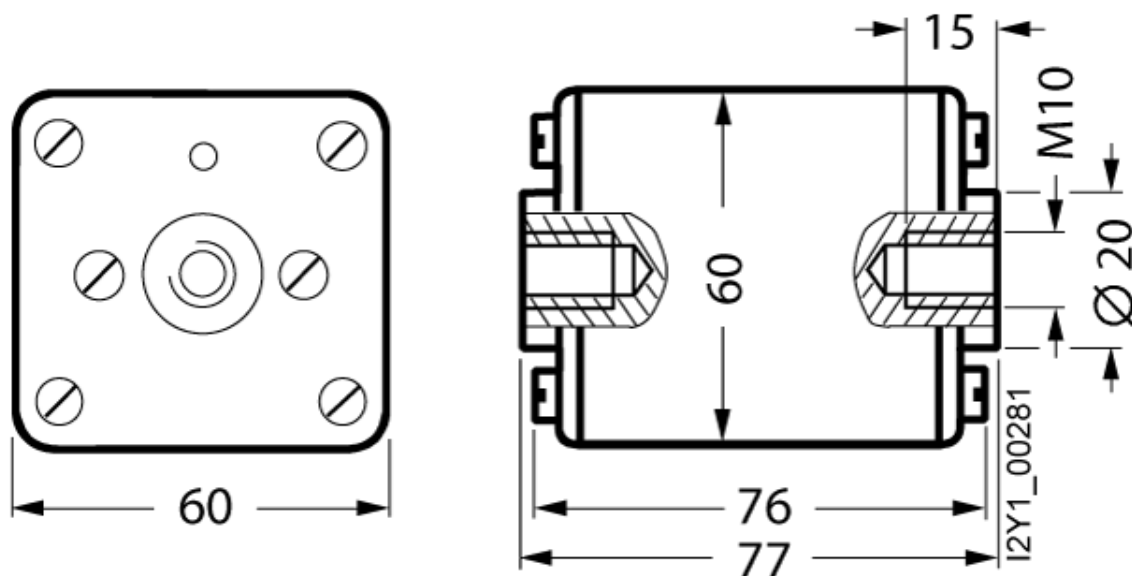

last modified:

3/11/2024

