



bus connectors broadened front mounted; 4 units extended pole-center distance for India

Model		
product brand name	SETRON	
product designation	Front bus connectors broadened 4 units	
accessories	Bus connector offset	
General technical data		
designation / of the terminal	screw-type termination	
Connections according IEC		
connectable conductor cross-section		
• for copper cable / stranded / minimum	120 mm²	
• for copper cable / stranded / maximum	370 mm²	
type of connectable conductor cross-sections / of the laminated conductor rails		
• minimum	1 x 60mm x 5mm	
• maximum	1x60x12.5	
tightening torque / when using copper cables		
• stranded	30	
thickness / of the busbar		
• minimum	5 ... 12.5	
• maximum		
width / of the busbar / maximum	60 mm	
Certificates		
General Product Approval	EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment		
	Miscellaneous	Confirmation	Miscellaneous	Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9484-0QC50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9484-0QC50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9484-0QC50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

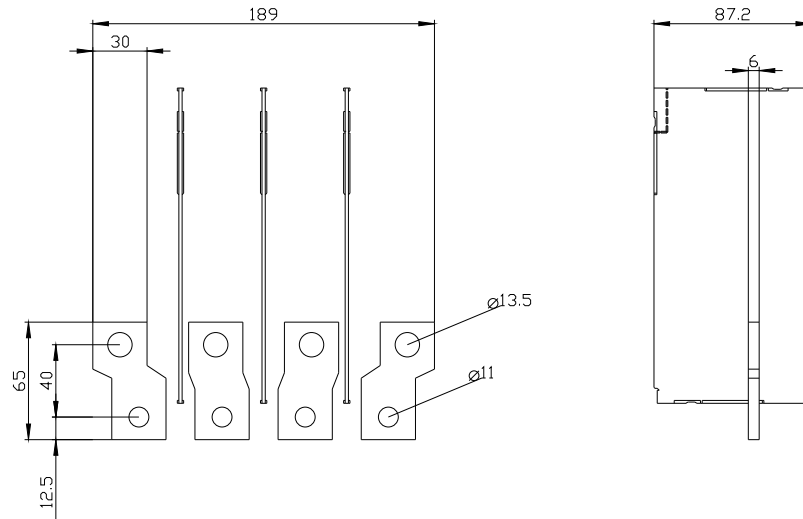

last modified:

7/5/2024 

