


accessory 3VJ9 IEC framesize 3VJ10 125A alarm switch 1 x changeover contact left

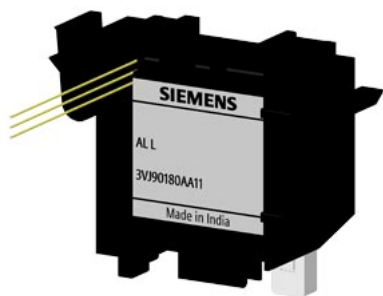


Model	
product designation	alarm switch
design of the product	accessory for 3VJ breaker
accessories	alarm switch
Voltage	
insulation voltage	500 V
operating voltage / at AC / at 50 Hz / rated value / minimum	240 V
operating voltage / at DC / rated value / minimum	48 V
Current	
thermal current	5 A
Mechanical Design	
net weight	13 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)


[Confirmation](#)

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9018-0AA11>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9018-0AA11>  
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VJ9018-0AA11](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9018-0AA11)  
CAx-Online-Generator  
<http://www.siemens.com/cax>  
Tender specifications

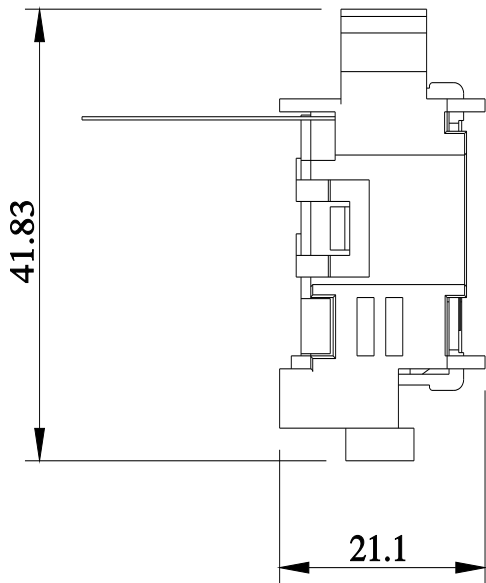

FRONT VIEW

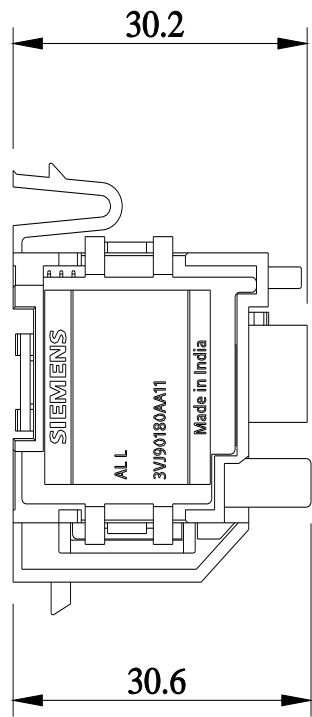

SIDE VIEW

last modified:

5/21/2021 

