

accessory 3VJ9 IEC framesize 3VJ11 125 framesize 3VJ12 250A shunt trip
110VDC


Model	
product designation	shunt
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
consumed active power / at DC / maximum	55 W
Voltage	
control supply voltage (Us) / at DC	110 V
Mechanical Design	
net weight	77 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)


[Confirmation](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9218-0ST15>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9218-0ST15>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9218-0ST15

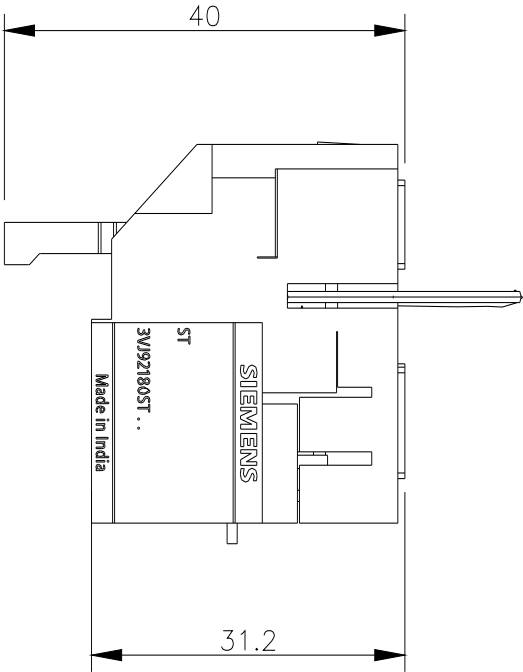

Side
View

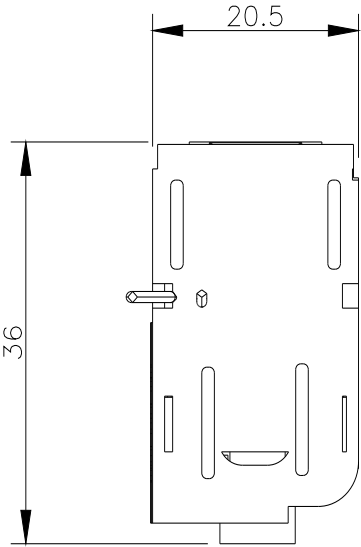

Front
View

last modified: 1/14/2021 

