

accessory 3VJ9 IEC framesize 3VJ11 125A framesize 3VJ12 250A undervoltage release 220VAC 50/60Hz

Model	
product designation	undervoltage release
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
apparent power consumption / maximum	55 VA
Voltage	
control supply voltage (Us) / at AC	220 V AC 50/60Hz
Mechanical Design	
net weight	148 g
ambient temperature / during operation	
• minimum	-5 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-5 °C
• maximum	70 °C
tightening torque / with screw-type terminals / minimum	0.5 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
ambient temperature / during storage	
• minimum	-5 °C
• maximum	70 °C
ambient temperature / during operation	
• minimum	-5 °C
• maximum	60 °C
Connections according IEC	
type of electrical connection / for auxiliary circuit	screw connection
stripped length	10 mm
connectable conductor cross-section	
• minimum	0.5 ... 2.5
• maximum	
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#) [Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9218-0UV36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9218-0UV36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9218-0UV36

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

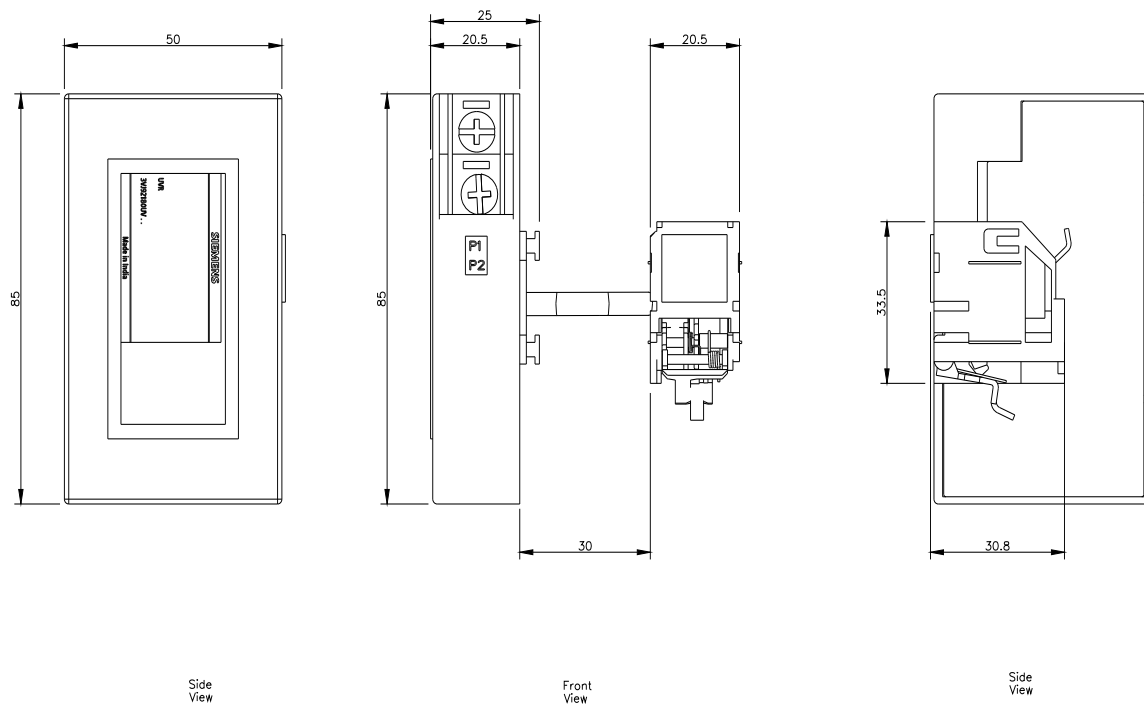

last modified:

1/14/2021 

