



accessory 3VJ9 IEC framesize 3VJ13 400A framesize 3VJ14 630A shunt trip  
110VAC 50/60Hz / DC

Model	
product designation	shunt
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
apparent power consumption / maximum	150 VA
consumed active power / at DC / maximum	130 W
Voltage	
control supply voltage (Us) / at AC	110 V AC 50/60Hz
control supply voltage (Us) / at DC	110 V
Mechanical Design	
net weight	143 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)

[Confirmation](#)

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9417-0ST25>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9417-0ST25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VJ9417-0ST25](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9417-0ST25)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

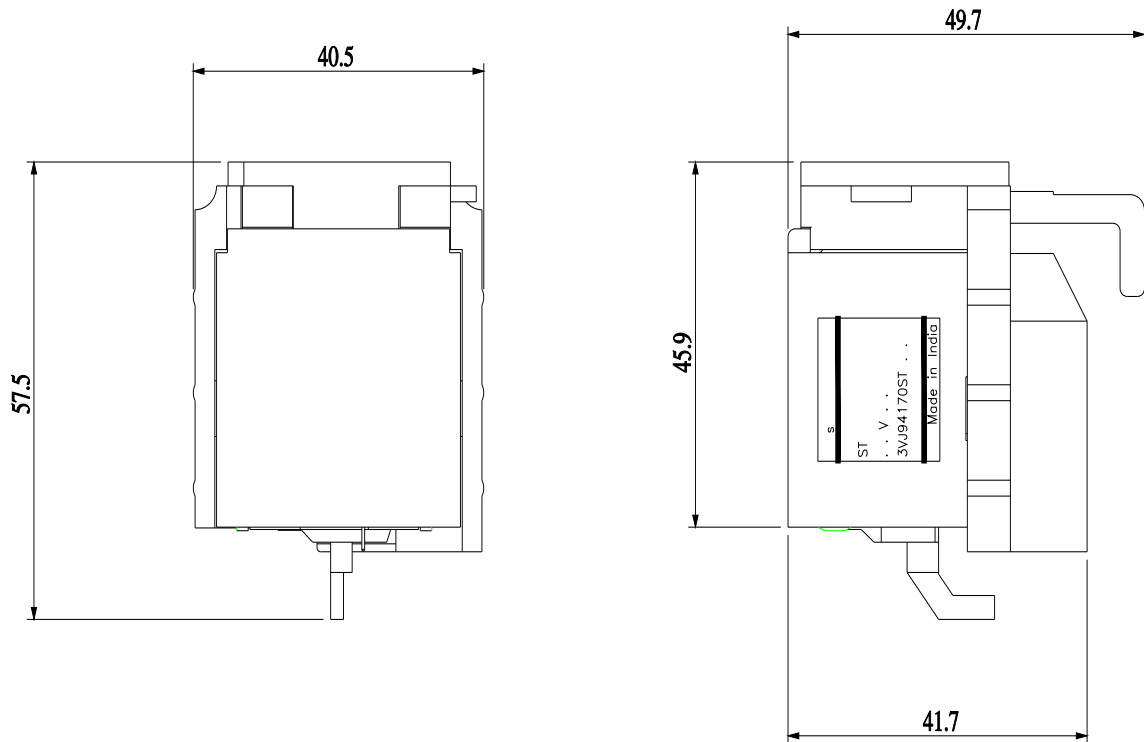

last modified:

1/14/2021

