




accessory 3VJ9 IEC framesize 3VJ13 400A framesize 3VJ14 630A shunt trip  
415VAC 50/60Hz

Model	
product designation	shunt
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
apparent power consumption / maximum	150 VA
Voltage	
control supply voltage (Us) / at AC	415 V AC 50/60Hz
Mechanical Design	
net weight	143 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information
Information on the packaging <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>
Information- and Downloadcenter (Catalogs, Brochures,...) <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>
Industry Mall (Online ordering system) <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9417-0ST37">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9417-0ST37</a>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <a href="https://support.industry.siemens.com/cs/ww/en/ps/3VJ9417-0ST37">https://support.industry.siemens.com/cs/ww/en/ps/3VJ9417-0ST37</a>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) <a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9417-0ST37">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9417-0ST37</a>

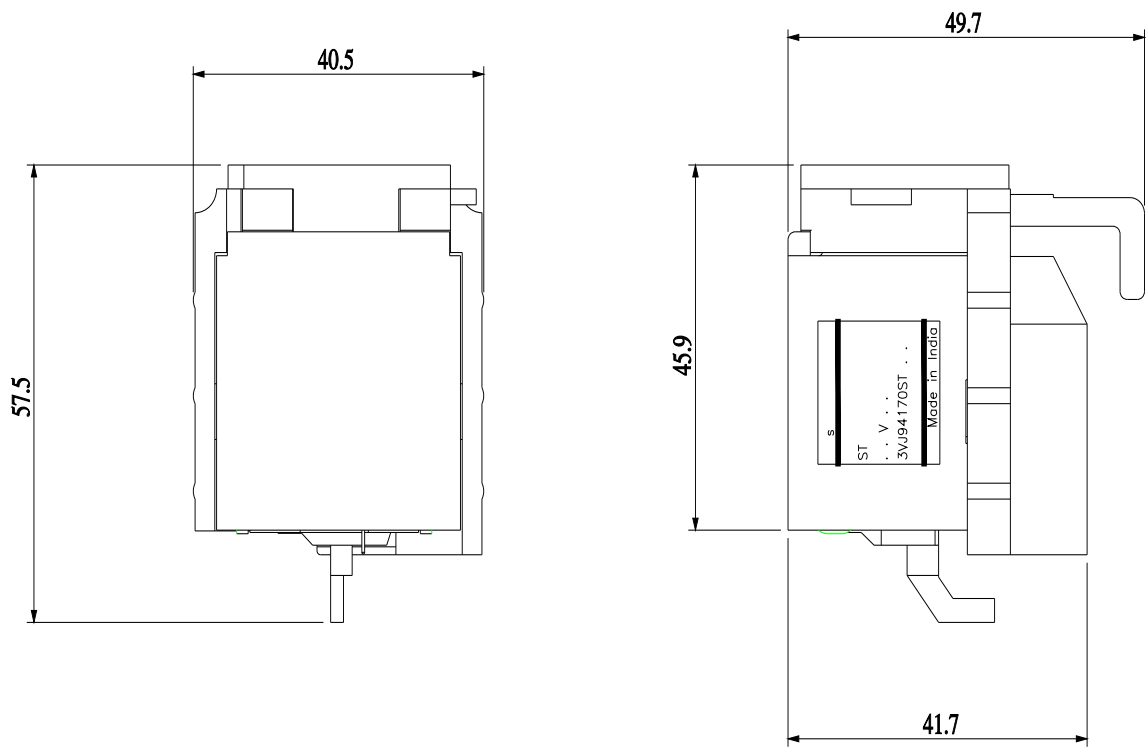

last modified:

1/14/2021

