SIEMENS

Data sheet 3VM9908-0BB11



undervoltage release 24 V DC accessory for: 3VM10-3VM14

product brand name	SENTRON	
product designation	Accessories	
design of the product	auxiliary release	
accessories	Auxiliary release	
eneral technical data		
degree of pollution	3	
overvoltage category	III	
consumed active power / at DC / maximum	2.5 W	
oltage		
surge voltage resistance	4 kV	
echanical Design		
neight	65.1 mm	
width	25.7 mm	
number of slots	3	
depth	28.8 mm	
net weight	91 g	
tightening torque / with screw-type terminals / minimum	0.4 N·m	
tightening torque / with screw-type terminals / maximum	0.5 N·m	
onnections according IEC		
stripped length	10 mm	
connectable conductor cross-section		
• minimum	0.5 1.5	
• maximum		
AWG number / as coded connectable conductor cross section / for auxiliary contacts		
• minimum	20	
• maximum	16	
onnetctions according UL		
stripped length [in]	0.4 in	
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in	
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in	





Confirmation

Miscellaneous

EHC

Miscellaneous

Marine / Shipping Environment other

LRS

Confirmation

Miscellaneous

Environmental Confirmations

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9908-0BB11

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VM9908-0BB11


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9908-0BB11


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

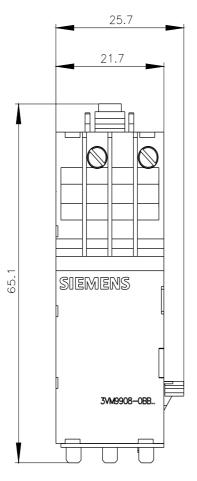

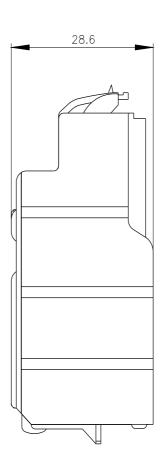

last modified: