SIEMENS

Data sheet 3VM9908-0BB23



undervoltage release 110 V AC 50/60 Hz accessory for: 3VM10-3VM14

product brand name	SENTRON	
product designation	Accessories	
lesign of the product	auxiliary release	
accessories	Auxiliary release	
neral technical data		
legree of pollution	3	
overvoltage category	III	
apparent power consumption / maximum	2 VA	
Itage		
surge voltage resistance	4 kV	
echanical Design		
neight	65.1 mm	
vidth	25.7 mm	
number of slots	3	
lepth	28.8 mm	
net weight	91 g	
ightening torque / with screw-type terminals / minimum	0.4 N·m	
ightening torque / with screw-type terminals / maximum	0.5 N·m	
nnections according IEC		
tripped length	10 mm	
connectable conductor cross-section		
• minimum	0.5 1.5	
• maximum		
AWG number / as coded connectable conductor cross section / or auxiliary contacts		
• minimum	20	
• maximum	16	
nnetctions according UL		
stripped length [in]	0.4 in	
ightening torque [lbf-in] / with screw-type terminals / minimum	3.5 lbf·in	
ightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in	





Confirmation

Miscellaneous



Miscellaneous

Marine / Shipping Environment other



Miscellaneous

Confirmation

Environmental Confirmations

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9908-0BB23

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VM9908-0BE


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9908-0BB23


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

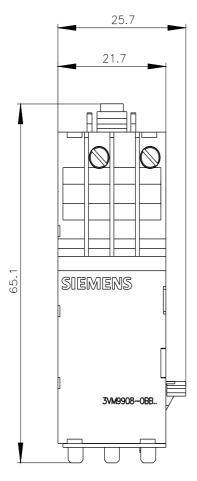

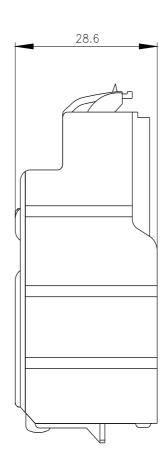

last modified:

3/11/2024

