## SIEMENS

## Data sheet

## 3VM9908-0BL33



shunt trip left 208-277 V AC 50/60Hz 220-250 V DC accessory for: 3VM10-3VM14

| odel   |                   |                   |  |  |
|--|-------------------|-------------------|--|--|
| product brand name   | SENTRON           |                   |  |  |
| product designation  | Accessories       |                   |  |  |
| design of the product  | auxiliary release |                   |  |  |
| accessories  | Auxiliary release |                   |  |  |
| eneral technical data  |                   |                   |  |  |
| degree of pollution  | 3                 |                   |  |  |
| overvoltage category   | III               |                   |  |  |
| apparent power consumption / maximum   | 40 VA             |                   |  |  |
| consumed active power / at DC / maximum  | 35 W              |                   |  |  |
| oltage   |                   |                   |  |  |
| surge voltage resistance   | 4 kV              |                   |  |  |
| echanical Design   |                   |                   |  |  |
| height   | 65.1 mm           |                   |  |  |
| width  | 25.7 mm           |                   |  |  |
| number of slots  | 3                 |                   |  |  |
| depth  | 31.2 mm           |                   |  |  |
| net weight   | 91 g              |                   |  |  |
| tightening torque / with screw-type terminals / minimum                            | 0.4 N·m           |                   |  |  |
| tightening torque / with screw-type terminals / maximum                            | 0.5 N·m           |                   |  |  |
| onnections according IEC   |                   |                   |  |  |
| stripped length  | 10 mm             |                   |  |  |
| connectable conductor cross-section  |                   |                   |  |  |
| • minimum  | 0.5 1.5           |                   |  |  |
| • maximum  |                   |                   |  |  |
| AWG number / as coded connectable conductor cross section / for auxiliary contacts |                   |                   |  |  |
| • minimum  | 20                |                   |  |  |
| • maximum  | 16                |                   |  |  |
| onnetctions according UL   |                   |                   |  |  |
| stripped length [in]   | 0.4 in            |                   |  |  |
| tightening torque [lbf·in] / with screw-type terminals / minimum                   | 3.5 lbf·in        |                   |  |  |
| tightening torque [lbf·in] / with screw-type terminals / maximum                   | 4.4 lbf·in        |                   |  |  |
| ertificates  |                   |                   |  |  |
| General Product Approval   |                   | Test Certificates |  |  |
|  |                   |                   |  |  |

| Marine / Shipping   | other                |                     | Environment                      |                                  |  |
|---------------------|----------------------|---------------------|----------------------------------|----------------------------------|--|
| Lloyd's<br>Register | <u>Miscellaneous</u> | <u>Confirmation</u> | Environmental Con-<br>firmations | Environmental Con-<br>firmations |  |

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9908-0BL33

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VM9908-0BL33

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VM9908-0BL33

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

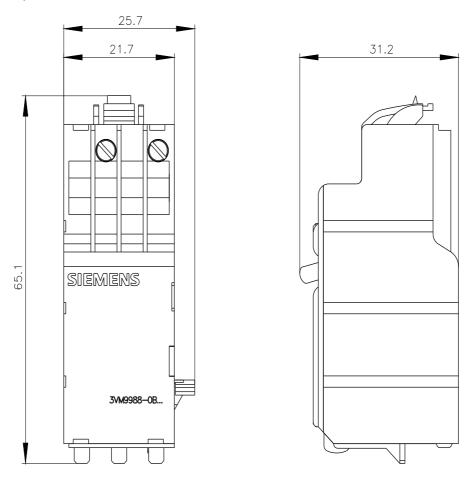

last modified: