



Miniature circuit breaker 240/415 V 10kA, 1-pole, C, 2A

Model	
product brand name	SETRON
product designation	Miniature circuit breaker
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	C
mechanical service life (operating cycles)	
• at AC typical	10 000
overvoltage category	III
degree of pollution	2
Voltage	
type of voltage of the operating voltage	AC
type of voltage	Use only in alternating current or direct current circuits. Mixed use is not permitted.
<b>insulation voltage (Ui)</b>	
• with single-phase operation at AC rated value	250 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	2 A
• at AC rated value	2 A
Supply voltage	
value range of the supply voltage frequency	50/60 Hz
operating voltage	
• with multi-phase operation at AC maximum	440 V
• at DC rated value maximum	62.5 V
•	The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V
value range of the supply voltage at AC	240/415 V
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
energy limitation class	3
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.25 W
suitability for operation	Residential buildings/infrastructure
Product details	
product feature touch protection	Yes

product component neutral conductor switching	No
<b>product feature</b>	
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

#### Connections

connectable conductor cross-section solid	
• minimum	0.75 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
connectable conductor cross-section stranded	
• minimum	0.75 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
connectable conductor cross-section finely stranded with core end processing	
• minimum	0.75 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3 N·m

#### Mechanical Design

height	90 mm
width	18 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1
mounting position	any
net weight	118 g

#### Environmental conditions

vibration resistance according to IEC 60068-2-6	no
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

#### Environmental footprint

Environmental Product Declaration (EPD)	Yes
Global Warming Potential [CO2 eq] total	26.9 kg
Global Warming Potential [CO2 eq] during manufacturing	0.73 kg
Global Warming Potential [CO2 eq] during operation	26.3 kg
Global Warming Potential [CO2 eq] after end of life	-0.066 kg

#### Approvals Certificates

General Product Approval	Test Certificates	other
--------------------------	-------------------	-------



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

other	Environment
-------	-------------

[Miscellaneous](#)



[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL4102-7RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL4102-7RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL4102-7RC](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL4102-7RC)


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

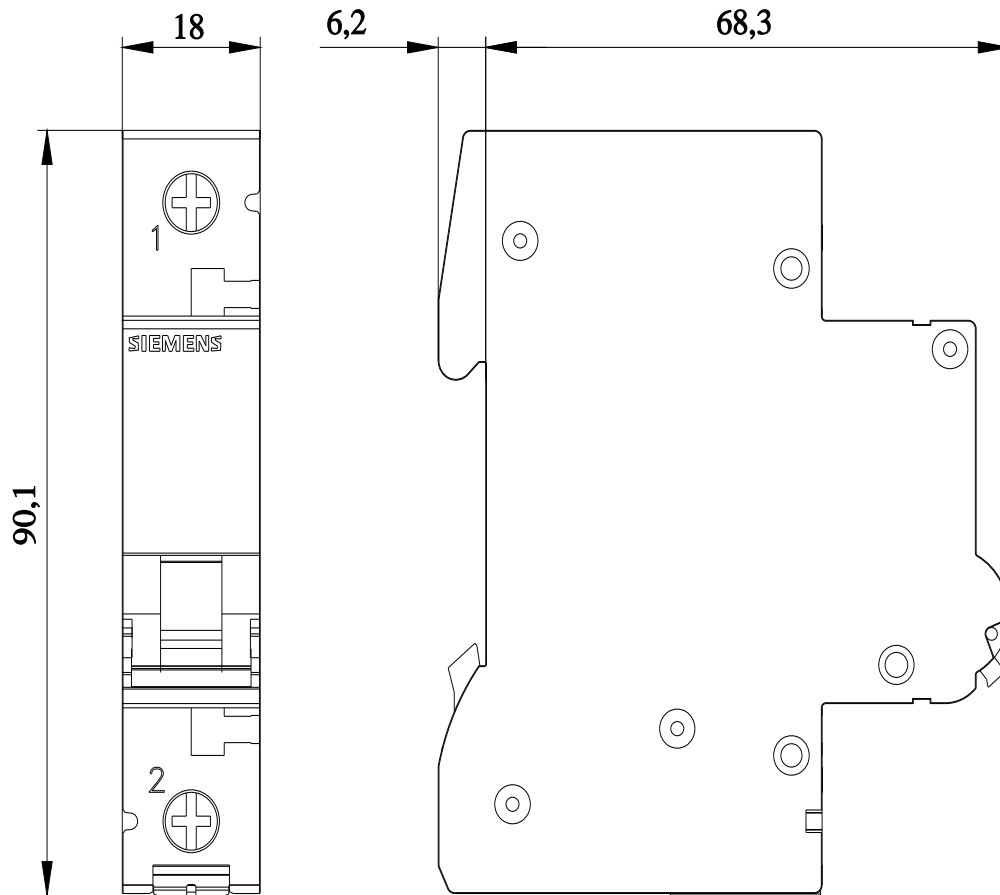

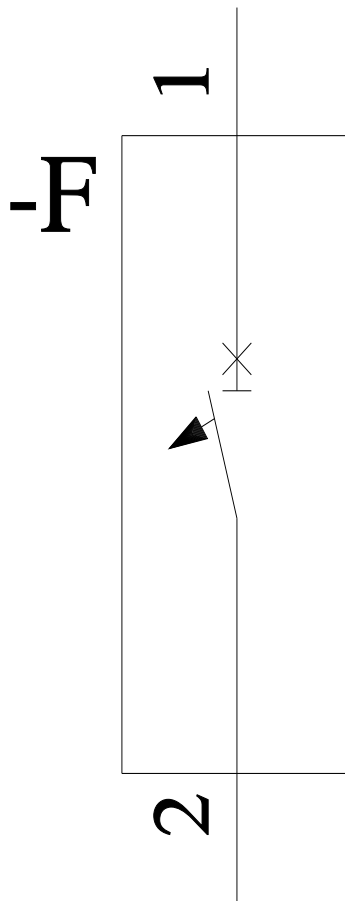

---

last modified:

8/6/2024 