



Miniature Circuit Breaker 32A 1-pole Z characteristic 10kA

| Model | |
|---|--|
| product brand name | Betagard |
| product designation | Miniature circuit breaker |
| General technical data | |
| number of poles | 1 |
| design of pole | 1P |
| tripping characteristic class | Z |
| mechanical service life (operating cycles) | |
| • typical | 8 500 |
| overvoltage category | III |
| degree of pollution | 3 |
| Voltage | |
| type of voltage of the operating voltage | AC |
| type of voltage | Use only in alternating current or direct current circuits. Mixed use is not permitted. |
| insulation voltage (Ui) | |
| • with single-phase operation at AC rated value | 440 V |
| • with multi-phase operation at AC rated value | 440 V |
| operational current | |
| • at 30 °C rated value | 35.8 A |
| • at 40 °C rated value | 34 A |
| • at 50 °C rated value | 32 A |
| • at 55 °C rated value | 31 A |
| • at 60 °C rated value | 29.9 A |
| • at AC rated value | 32 A |
| Supply voltage | |
| value range of the supply voltage frequency | 50/60 Hz |
| operating voltage | |
| • with multi-phase operation at AC maximum | 440 V |
| • at DC rated value maximum | 62.5 V |
| • | The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V |
| value range of the supply voltage at AC | 240/415 V |
| Protection class | |
| protection class IP | IP20, with connected conductors |
| Breaking Capacity | |
| switching capacity current | |
| • according to EN 60898 rated value | 10 kA |
| • according to IEC 60947-2 rated value | 10 kA |
| energy limitation class | NA |

| Product details | | | |
|--|--|-------------------------|-------------|
| product feature touch protection | | Yes | |
| product component neutral conductor switching | | No | |
| product feature | | | |
| • halogen-free | | Yes | |
| • sealable | | Yes | |
| • silicon-free | | Yes | |
| product extension installable supplementary devices | | Yes | |
| Connections | | | |
| connectable conductor cross-section solid | | | |
| • minimum | | 0.75 mm² | |
| • maximum | | 25 mm² | |
| connectable conductor cross-section stranded | | | |
| • minimum | | 0.75 mm² | |
| • maximum | | 25 mm² | |
| connectable conductor cross-section finely stranded with core end processing | | | |
| • minimum | | 0.75 mm² | |
| • maximum | | 25 mm² | |
| tightening torque with screw-type terminals | | | |
| • minimum | | 2.5 N·m | |
| • maximum | | 3 N·m | |
| Mechanical Design | | | |
| height | | 90 mm | |
| width | | 18 mm | |
| depth | | 76 mm | |
| installation depth | | 70 mm | |
| number of modular width units | | 1 | |
| mounting position | | any | |
| net weight | | 149 g | |
| Environmental conditions | | | |
| vibration resistance according to IEC 60068-2-6 | | 50 m/s² at 25 to 150 Hz | |
| ambient temperature during storage | | | |
| • minimum | | -40 °C | |
| • maximum | | 75 °C | |
| Environmental footprint | | | |
| Environmental Product Declaration(EPD) | | Yes | |
| Global Warming Potential [CO2 eq] total | | 26.9 kg | |
| Global Warming Potential [CO2 eq] during manufacturing | | 0.73 kg | |
| Global Warming Potential [CO2 eq] during operation | | 26.3 kg | |
| Global Warming Potential [CO2 eq] after end of life | | -0.066 kg | |
| Approvals Certificates | | | |
| General Product Approval | | Test Certificates | other |
| | | | Environment |

[Confirmation](#)



[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)



Environment

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL4132-0RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL4132-0RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL4132-0RC


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

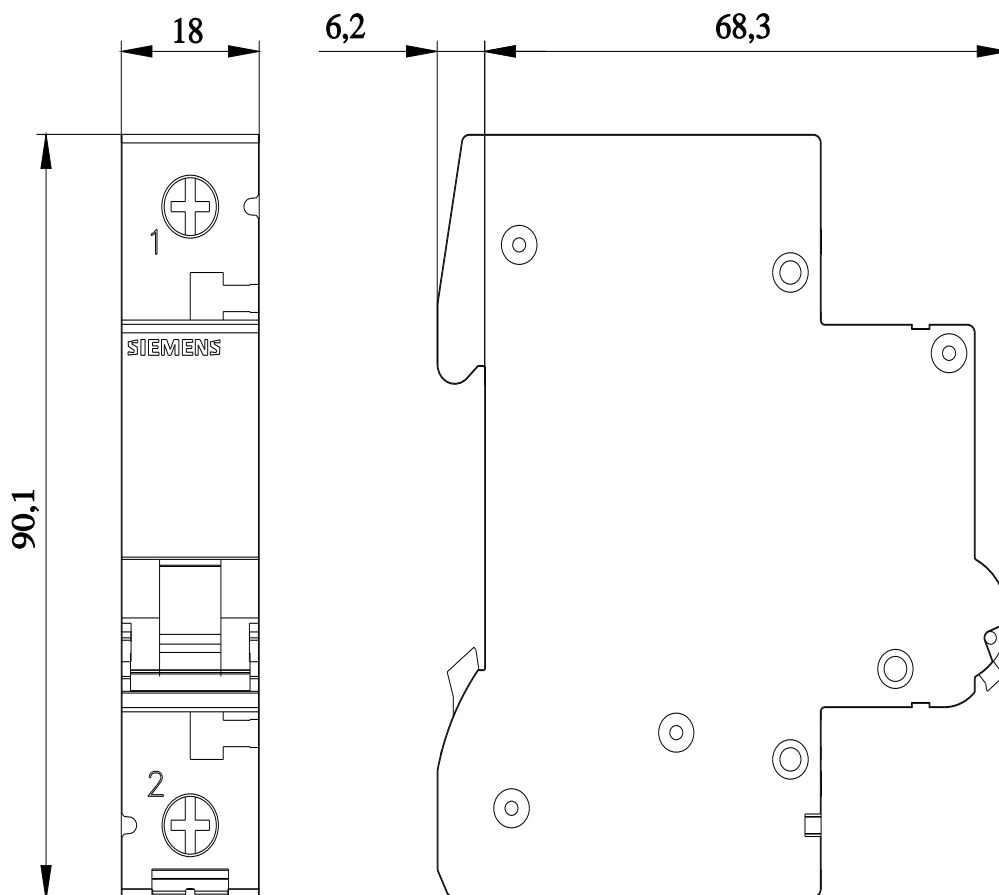

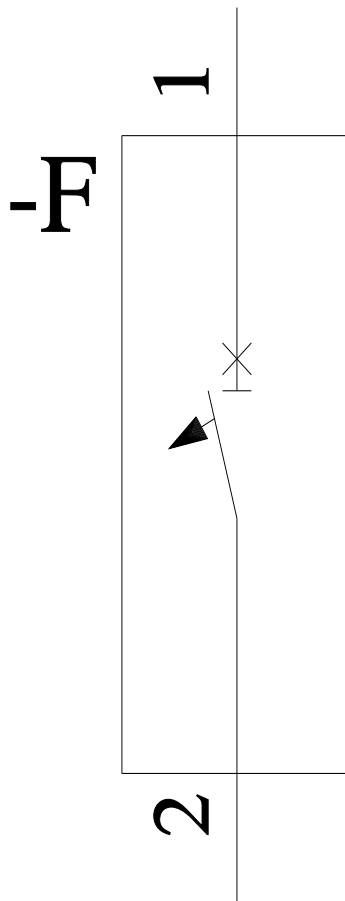

last modified:

8/6/2024 