


# Product datasheet

Specifications

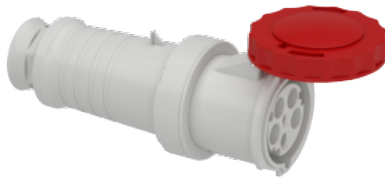

## PratiKa wander socket - straight - 63 A - 3P + N + E - 380...415 V AC - IP67

81483

### Main

Range	Mureva
Product or component type	Wander socket
Device short name	Mureva socket
Plug, socket category	Low voltage
Poles description	3P + N + E
Network type	AC
Outlet standard	Industrial

### Complementary

Plug, socket, control station shape	Straight
[In] rated current	63 A
[Ue] rated operational voltage	380...415 V
Network frequency	50/60 Hz
Ground lug clockwise position	6 h
Plug, socket material	Housing: self-extinguishing engineering polymer
Contacts material	Pins: stainless steel Sleeves: nickel plated brass Springs: stainless steel
Connections - terminals	Captive screws
Cable cross section	6...25 mm²
Cable outer diameter	17...31 mm
Cable entry	Cable gland
Thread type	Pg 36
Net weight	0.783 kg
Height	110 mm
Width	110 mm
Depth	265 mm
Colour	Grey (RAL 7035)
Voltage colour	Red

Environment

Standards	IEC 60309-2 IEC 60309-1
IP degree of protection	IP67 conforming to IEC 60529
IK degree of protection	IK08 conforming to EN 62262
Fire resistance	850 °C conforming to IEC 60695-2-1
Relative humidity	50 % at 40 °C 70 % at 30 °C 90 % at 20 °C
Ambient air temperature for operation	35 °C ( 86400 s ) -25...40 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.800 cm
Package 1 Width	10.900 cm
Package 1 Length	27.600 cm
Package 1 Weight	788.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	10
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	8.387 kg

Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Circularity Profile	No need of specific recycling operations

Recommended replacement(s)