


Product datasheet

Specifications



voltage transformer - 230..400 V - 1 x 24 V - 160 VA

Local distributor code:

391228494

ABL6TS16B

⚠ To be discontinued on: 30 May 2024

⚠ To be end-of-service on: 30 May 2025

⚠ To be discontinued

EAN Code: 3389110585841

Main

Range Of Product	Modicon Transformer Optimized
Product Or Component Type	Safety and isolation transformer
Rated Power In Va	160 VA
Input Voltage	230 V AC single phase, terminal(s): N-L1 400 V AC phase to phase, terminal(s): L1-L2
Output Voltage	24 V AC
Secondary Winding	Single
Protective Cover	Without
Ambient Air Temperature For Operation	-20...50 °C

Complementary

Input Voltage Limits	360...440 V 207...253 V
Network Frequency Limits	47...63 Hz
Input Voltage Tolerance	+/- 15 V
Efficiency	88 %
Power Dissipation In W	21.8 W
Output Sustained Overvoltage	7 % (no load, hot state)
Maximum Voltage Drop At Rated Load	0.3 %
No Load Losses	9.1 W
Short-Circuit Voltage	0,0681
Output Protection Type	Against overload, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against overvoltage, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against short-circuits, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection
Connections - Terminals	For input connection: screw type terminals, connection capacity: 5 x 4 mm ² AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 4 mm ² AWG 11 For output connection: screw type terminals, connection capacity: 2 x 4 mm ² AWG 11
Marking	CE
Fixing Mode	By 4 screws diameter: 5.8 mm on vertical panel, operating position: horizontal By 4 screws diameter: 5.8 mm on vertical panel, operating position: vertical By 4 screws diameter: 5.8 mm on horizontal panel with derating to 90 %
Operating Altitude	3000 m

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Electrical Insulation Class	Class B
Width	105.0 mm
Height	81.0 mm
Depth	112.0 mm
Net Weight	2.84 kg

Environment

Product Certifications	EAC UR DNV-GL
Standards	UL 506
Ip Degree Of Protection	IP20
Environmental Characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Protective Treatment	TC
Ambient Air Temperature For Storage	-40...80 °C
Overvoltage Category	Class I conforming to VDE 0106-1
Dielectric Strength	2000 V between winding and ground 4000 V between primary and secondary

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	22.500 cm
Package 1 Width	22.000 cm
Package 1 Length	20.000 cm
Package 1 Weight	3.114 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	30
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	105.940 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability



Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance


<div><div>✓</div><div>Mercury Free</div></div>	
<div><div>✓</div><div>Rohs Exemption Information</div></div>	<div>Yes</div>
<div><div>✓</div><div>Pvc Free</div></div>	

Certifications & Standards

Reach Regulation	<div>REACH Declaration</div>
Eu Rohs Directive	<div>Pro-active compliance (Product out of EU RoHS legal scope)</div>
China Rohs Regulation	<div>China RoHS declaration</div>
Environmental Disclosure	<div>Product Environmental Profile</div>
Circularity Profile	<div>No need of specific recycling operations</div> <div>Circularity Profile</div>

Dimensions Drawings

Dimensions

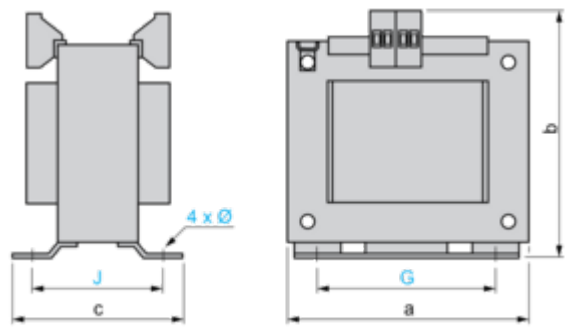

Dimensions in mm


a	b	c	G	J	Ø
105	112	81	80.5	63	5.8

Dimensions in in.


a	b	c	G	J	Ø
4.13	4.41	3.19	3.17	2.48	0.23

Connections and Schema

Internal Scheme

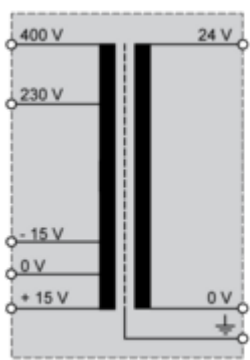

Primary Voltage Wiring

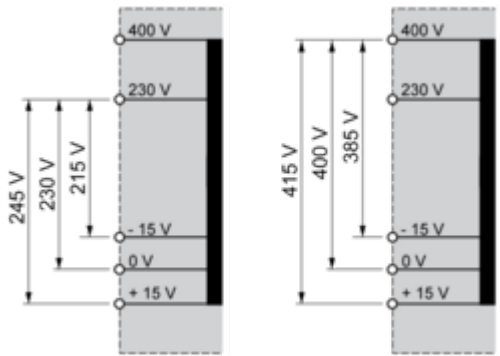

Secondary Voltage Wiring

