Product datasheet

Specification





Regulated Power Supply, 100 to 240V AC, 5V, 3.6A, single phase, Modular

ABLM1A05036

Main

Range of product	Modicon Power Supply		
Product or component type	Power supply		
Power supply type	Regulated switch mode		
Variant option	Modular		
Enclosure material	Plastic		
Nominal input voltage	100240 V AC single phase 100240 V AC phase to phase		
Rated power in W	18 W		
Output voltage	5 V DC		
Power supply output current	3.6 A		

Complementary

Complementary	
Input voltage limits	90264 V AC
Nominal network frequency	5060 Hz
Network system compatibility	TN
	TT IT
	11
Maximum leakage current	0.25 mA 240 V AC
Input protection type	Integrated fuse (not interchangeable) 3.15 A
	External protection (recommended) 20 A Curve B
	External protection (recommended) 20 A Curve C
	External protection (recommended) 4 A Curve B
	External protection (recommended) 4 A Curve C
Inrush current	25 A at 115 V
	50 A at 230 V
Power factor	0.48 at 115 V AC
	0.38 at 230 V AC
Efficiency	80 % at 115 V AC
•	80 % at 230 V AC
Output voltage adjustment	4.55.5 V
Power dissipation in W	4.5 W
Current consumption	< 0.6 A 115 V AC
	< 0.4 A 230 V AC
Turn-on time	<2s
Holding time	> 20 ms 115 V AC
	> 60 ms 230 V AC
Startup with capacitive loads	3000 μF

Residual ripple	< 100 mV				
Meantime between failure [MTBF]	2500000 h at 25 °C, full load 1000000 h at 55 °C, 80 % load				
Output protection type	Against overload and short-circuits, protection technology: automatic reset Against over temperature, protection technology: manual reset Against overvoltage, protection technology: manual reset				
Connections - terminals	Screw connection: 0.51.5 mm², (AWG 20AWG 16) without wire end ferrule for input/output Screw connection: 0.51 mm², (AWG 20AWG 18) with wire end ferrule for input/output				
Line and load regulation	< 0.5 % at in line < 1 % at 0 to 100 % load				
Status LED	1 LED (green) output voltage				
Depth	55.6 mm				
Height	91 mm				
Width	36 mm				
Net weight	0.170 kg				
Output coupling	Serial				
Mounting support	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 Double-profile DIN rail panel mounting				
Supply	SELV conforming to IEC 60950-1 SELV conforming to IEC 60204-1 SELV conforming to IEC 60364-4-41				
Dielectric strength	3000 V AC input/output				
Service life	10 year(s)				
Overvoltage category	П				

Environment

Standards	IEC 62368-1 EN/IEC 61010-1 EN 61010-2-201 EN/IEC 61204-3 IEC 61000-6-1 IEC 61000-6-2 IEC 61000-6-3 IEC 61000-8-3 IEC 61000-3-2 EN 61000-3-3 UL 62368-1 UL 61010-1 UL 61010-2-201 CSA C22.2 No 61010-1 CSA C22.2 No 61010-2-201 EN/IEC 62368-1
Product certifications	CE CUL listed CUL recognized RCM CB Scheme EAC KC NEC: class 2
Operating altitude	< 2000 m overvoltage category III 2000 m5000 m overvoltage category II
Shock resistance	150 m/s² for 11 ms
IP degree of protection	IP20

Ambient air temperature for operation	-2555 °C without current derating mounting position A < 2000 m 5570 °C with current derating of 2.67 % per °C mounting position A < 2000 m		
Electrical shock protection class	Class II without PE connection		
Pollution degree	2		
Vibration resistance	3 mm (f= 29 Hz) conforming to IEC 60721-3-3		
	10 m/s² (f= 9200 Hz) conforming to IEC 60721-3-3		
Electromagnetic immunity	Immunity to electrostatic discharge - test level: 8 kV (contact discharge) conforming to IEC 61000-4-2		
	Immunity to electrostatic discharge - test level: 15 kV (air discharge) conforming to IEC 61000-4-2		
	Electromagnetic field immunity test - test level: 15 V/m (80 MHz2 GHz) conforming to IEC 61000-4-3		
	Electromagnetic field immunity test - test level: 5 V/m (22.7 GHz) conforming to IEC 61000-4-3		
	Electromagnetic field immunity test - test level: 5 V/m (2.76 GHz) conforming to IEC 61000-4-3		
	Immunity to fast transients - test level: 4 kV (on input-output) conforming to IEC 61000-4-4		
	Surge immunity test - test level: 4 kV (between power supply and earth) conforming to IEC 61000-4-5		
	Surge immunity test - test level: 3 kV (between phases) conforming to IEC 61000-4-5 Immunity to conducted disturbances - test level: 15 V (0.1580 MHz) conforming to IEC 61000-4-6		
	Immunity to magnetic fields - test level: 30 A/m (5060 Hz) conforming to IEC 61000-4-8		
	Immunity to voltage dips - test level: 100 % (1 cycle) conforming to IEC 61000-4-11 Immunity to voltage dips - test level: 60 % (10 cycles) conforming to IEC 61000-4-11 Immunity to voltage dips - test level: 30 % (25 cycles) conforming to IEC 61000-4-11 Dicturbing fold emission conforming to EN 5E116 3 2		
	Disturbing field emission conforming to EN 55016-2-3 Limits for harmonic current emissions conforming to IEC 61000-3-2 conforming to EN 55016-1-2 conforming to EN 55016-2-1		
Electromagnetic emission	Conducted emissions conforming to IEC 61000-6-3 Radiated emissions conforming to IEC 61000-6-4		

Packing Units

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	6.2 cm
Package 1 Length	11 cm
Package 1 Weight	173 g
Unit Type of Package 2	S02
Number of Units in Package 2	29
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.51 kg
Unit Type of Package 3	P12
Number of Units in Package 3	928
Package 3 Height	75.0 cm
Package 3 Width	120.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	186 kg

Sustainability Screen Premium*

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

06-Aug-2024

Product datasheet

ABLM1A05036


Dimensions Drawings


Electrical Safety

- If the unit is use in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
- For means of disconnection a switch or circuit breaker, located near the product, must be included in the installation. A marking as disconnecting device for the product is required.
- The device has an internal fuse. The unit is tested and approved with branch circuit protective device up to 20A. This circuit breaker can be used as disconnecting device.
- The power supply is only suitable for audio, video, information, communication, industrial and control equipment

Dimensions

Side and Rear View

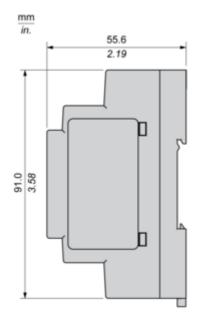


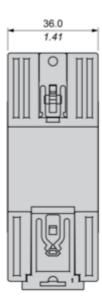

Connections and Schema


Connections and Schema

Correct Parallel Connection

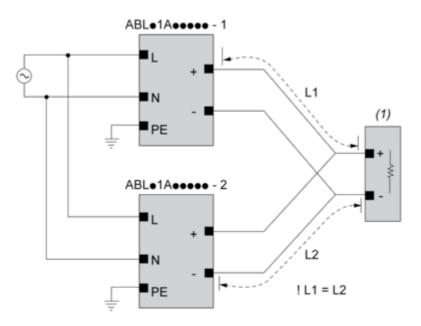

(1): Load


Incorrect Parallel Connection

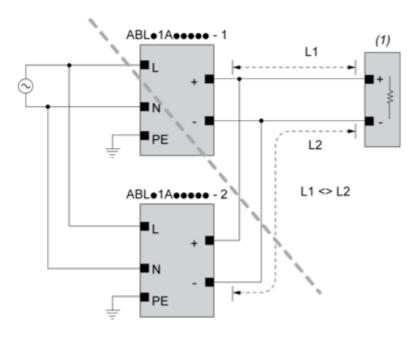

(1): Load ABLx1Axxxxx-1 = ABLx1Axxxxx-2 max 2 x ABLx1Axxxxx L1 = L2 $\Delta V max 25 mV$ $I_{Load} < 90\% 2 x I_{nom}$


Output Voltage Balancing

ABLM1A05036

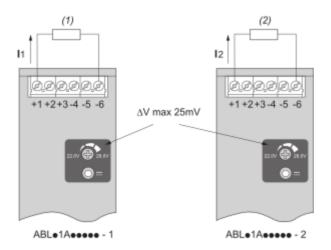

- (1): R_{Load1}
- (2): R_{Load2}
- $R_{Load1} = R_{Load2}$
- $I_1 = I_2 = \sim I_{\text{nom}}$

Series Connection

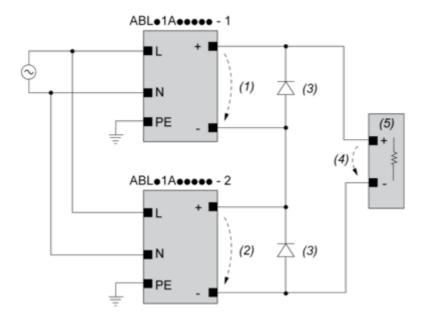

- (1): V_{out1}
- (2) : V_{out2}
- (3) : 2 x Diode, $V_{RRM} > 2 \times V_{out1/2}$, $I_F > 2 \times I_{nom1/2}$
- (4) : V_{Load} = 2 x V_{out}
- (5) : Load

Connections and Schema


		(1)		
		<40°C	<50°C	<70°C
ABLM1A24004		60°C	75°C	75°C
ABLM1A12010		60°C	75°C	90°C
ABLM1A24006		60°C	75°C	90°C
ABLM1A05036	Input	60°C	75°C	90°C
	Output	75°C	90°C	90°C
ABLM1A12021		60°C	75°C	90°C
ABLM1A24012		60°C	75°C	90°C
ABLM1A12042		60°C	75°C	90°C
ABLM1A24025		60°C	75°C	90°C

(1): Ambient


Mounting and Clearance

Mounting

Mounting Position A

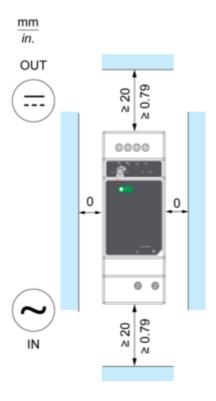


Mounting Position B

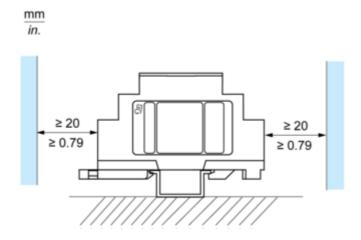



Incorrect Mounting

Product datasheet

ABLM1A05036








ABLM1A05036

Performance Curves

Performance Curve

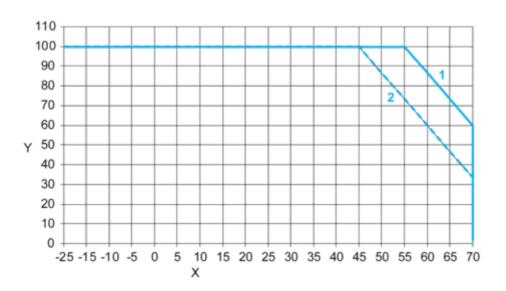

X : Ambient Temperature (°C)
Y : Percentage of Max Load (%)
1 : Mounting A & B, altitude 2000M
2 : Mounting A & B, altitude 5000M