



# voltage transformer - 230 V - 1 x 24 V - 400 VA

ABT7ESM040B

- Discontinued on: Nov 21, 2022
- ! To be end-of-service on: Jun 1, 2025

#### ① Discontinued

#### Main

Range Of Product	Modicon Transformer Economic			
Product Or Component Type	Safety and isolation transformer			
Rated Power In Va	400 VA			
Input Voltage	230 V AC phase to phase, terminal(s): L1-L2 230 V AC single phase, terminal(s): N-L1			
Output Voltage	24 V AC			
Secondary Winding	Single			
Protective Cover	Without			
Ambient Air Temperature For Operation	-2040 °C			

# Complementary

,	
Input Voltage Limits	207253 V
Network Frequency Limits	4763 Hz
Input Voltage Tolerance	+/- 15 V
Efficiency	90 %
Power Dissipation In W	44.4 W
Voltage Variation At Nominal Load	0,0429 at 230 V
Output Sustained Overvoltage	5 % (no load, hot state)
Maximum Voltage Drop At Rated Load	5.75 %
No Load Losses	19.3 W
Short-Circuit Voltage	0,055
Output Protection Type	Against overload, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against overvoltage, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against short-circuits, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection
Connections - Terminals	For input connection: screw type terminals, connection capacity: 4 x 2.54 x 4 mm² AWG 14AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 2.51 x 4 mm² AWG 14AWG 11 For output connection: screw type terminals, connection capacity: 2 x 2.52 x 4 mm² AWG 14AWG 11
	CE

Fixing Mode	By 4 screws diameter: 5 mm on vertical panel, operating position: horizontal By 4 screws diameter: 5 mm on vertical panel, operating position: vertical By 4 screws diameter: 5 mm on horizontal panel with derating to 90 %				
Operating Altitude	3000 m				
Electrical Insulation Class	Class B				
Width	120.0 mm				
Height	104.0 mm				
Depth	122.0 mm				
Net Weight	5.12 kg				

### **Environment**

Product Certifications	EAC DNV-GL
Ip Degree Of Protection	IP20
Environmental Characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Ambient Air Temperature For Storage	-4080 °C
Relative Humidity	095 % during operation
Overvoltage Category	Class I conforming to VDE 0106-1
Dielectric Strength	3200 V between input and ground 3200 V between output and ground 5100 V between input and output

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	25.500 cm
Package 1 Width	18.500 cm
Package 1 Length	14.800 cm
Package 1 Weight	5.430 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	22
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	132.460 kg

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance

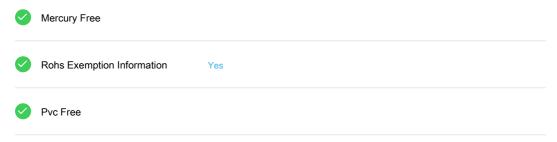


#### **Certifications & Standards**

Reach Regulation	REACh Declaration				
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)				
China Rohs Regulation	China RoHS declaration				
<b>Environmental Disclosure</b>	Product Environmental Profile				
Circularity Profile	No need of specific recycling operations  Circularity Profile				

### ABT7ESM040B

### **Dimensions Drawings**

### **Dimensions**

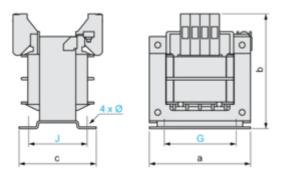

#### Dimensions in mm

а	b	С	G	J	Ø
120	122	104	90	86	5.8

#### Dimensions in in.


Difficiono in in.					
а	b	С	G	J	Ø
4.72	4.80	4.09	3.54	3.39	0.23

### **Product datasheet**


### ABT7ESM040B

Connections and Schema

### Internal Scheme



### Primary Voltage Wiring



### Secondary Voltage Wiring

