

# Product data sheet

Specifications



## Regenerative unit, Altivar, 7,5kW, for Altivar variable speed drive

ATVRU75N4

### Main

Range of product	Altivar
Range compatibility	Altivar Machine ATV340 Altivar Process ATV900 Altivar Machine ATV320
Product or component type	Power module
Device application	Energy regeneration
[Us] rated supply voltage	380...500 V - 15...10 %
[Ue] rated operational voltage	456...778 V DC
Rated power in W	6.8 kW

### Complementary

Network frequency	45...65 Hz
Network number of phases	3 phases
Fixing mode	By screws
Maximum voltage drop at rated load	3 %
Electrical connection	Control: removable screw terminal block: 0.5...1.5 mm², AWG 20...AWG 16 (bottom) Power supply: removable screw terminal block: 2.5...4 mm², AWG 12...AWG 10 (top) DC bus: removable screw terminal block: 2.5...4 mm², AWG 12...AWG 10 (bottom)
Input current	16.5 A at 380 V AC for voltage inputs (continuous) 14.5 A at 500 V AC for voltage inputs (continuous) 22.9 A at 380 V AC for voltage inputs (transient for 60 s) 19.1 A at 500 V AC for voltage inputs (transient for 60 s)
Input power	6.8 kW at 380...500 V AC for voltage inputs (continuous) 10.2 kW at 380...500 V AC for voltage inputs (transient for 60 s)
Maximum DC bus voltage	300...880 V DC
Output current	13.4 A at 380 V AC (continuous) 11.9 A at 500 V AC (continuous) 18.4 A at 380 V AC (transient for 60 s) 15.4 A at 500 V AC (transient for 60 s)
Width	80 mm
Height	337 mm
Depth	175 mm
Net weight	6 kg

Environment

Standards	IEC 61800-5-1 IEC 61800-3
Product certifications	cUL
Ambient air temperature for operation	-10...50 °C without derating 50...60 °C with derating factor
Ambient air temperature for storage	-40...70 °C
Operating altitude	<= 1000 m without derating 1000...3000 m with power derating 1 % per 100 m
Operating position	Vertical or horizontal position
Type of cooling	Fan
Environmental characteristic	Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3 Dust pollution resistance class 3S2 conforming to EN/IEC 60721-3-3
Pollution degree	2 conforming to EN/IEC 61800-5-1

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	20 cm
Package 1 Width	25.8 cm
Package 1 Length	51.5 cm
Package 1 Weight	7.51 kg
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	75 cm
Package 2 Width	60 cm
Package 2 Length	80 cm
Package 2 Weight	58.06 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>



Dimensions

Front and Side Views

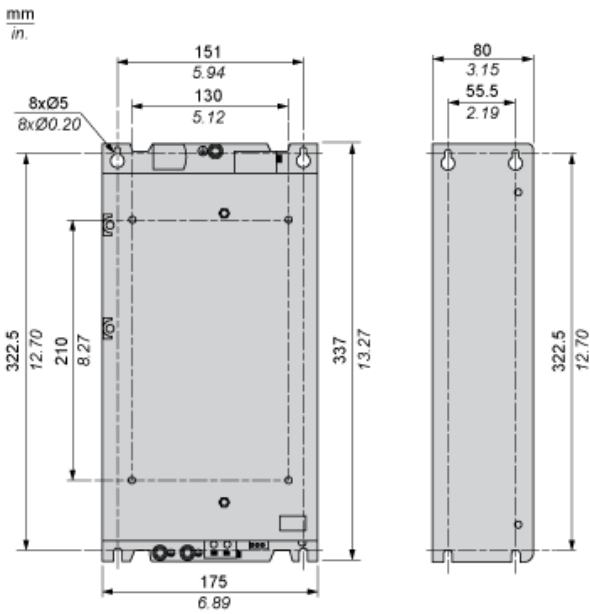


Mounting Recommendations

Vertical Flat Mounting

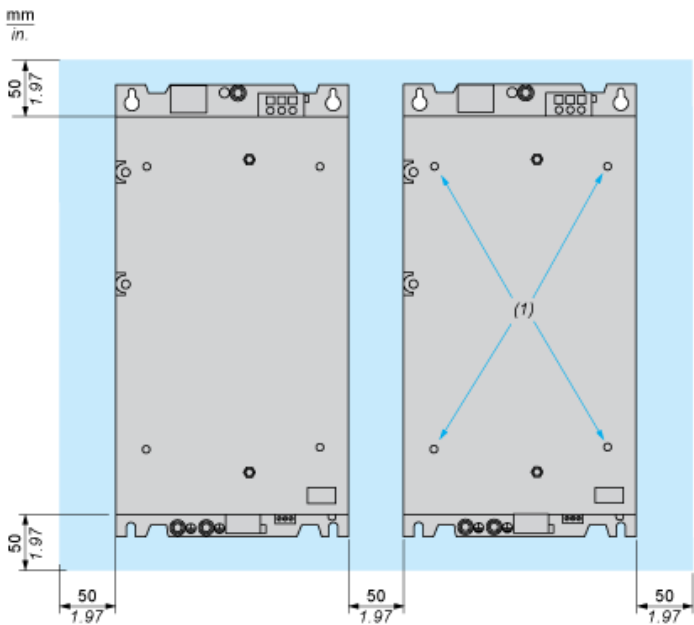
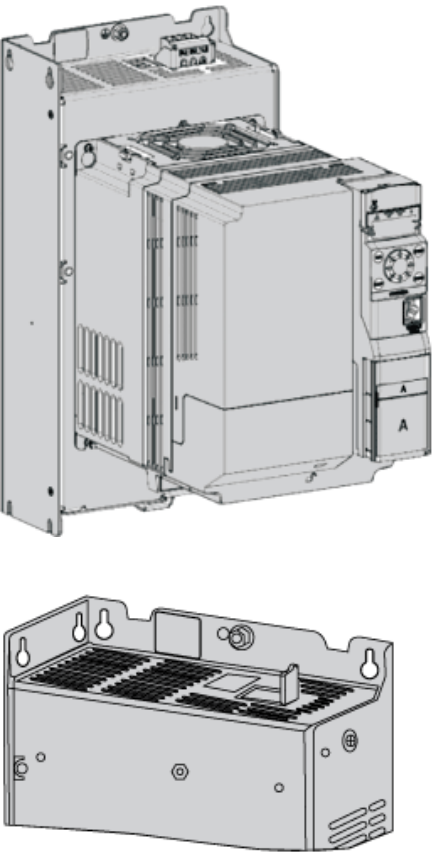


(1) :     Fixing holes for ATV320

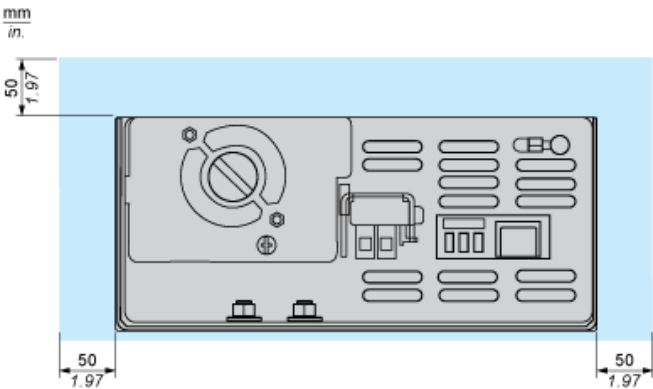


Mounting Recommendations

Side by Side Mounting

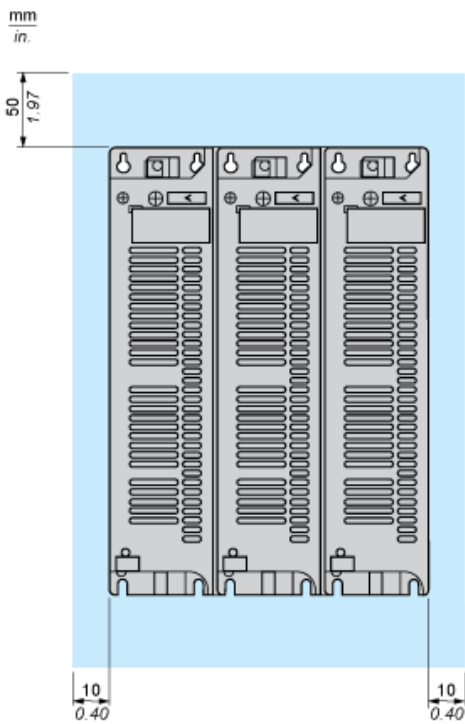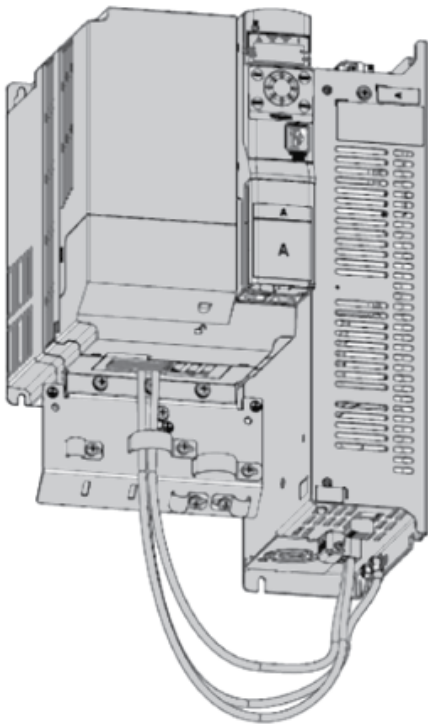


Mounting Recommendations

Horizontal Flat Mounting

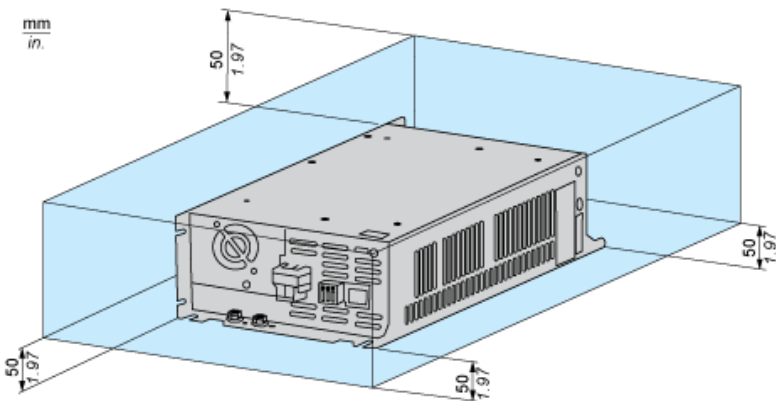

Wiring Diagram

Drive and Regenerative Unit

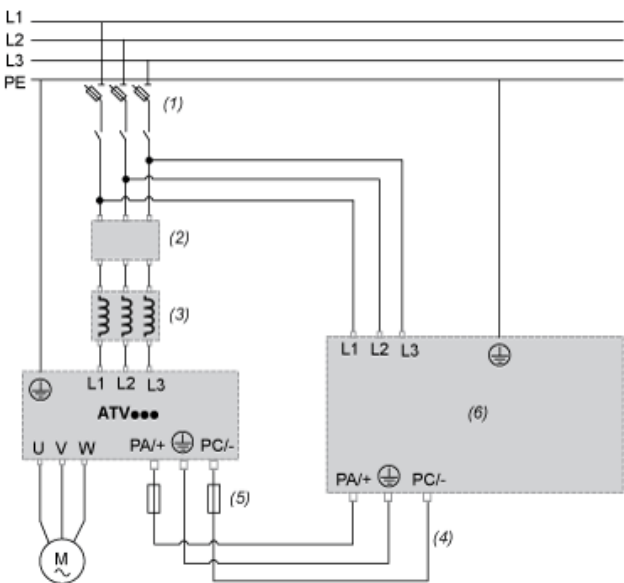

- (1) : AC protection fuses
- (2) : Optional additional EMC input Filter (see drive catalog)
- (3) : Optional AC Choke (see drive catalog)
- (4) : DC bus link
- (5) : DC protection fuses
- (6) : Altivar Regenerative Unit

Recommended replacement(s)