Specifications



#### Main

Product or Component Type	Circuit breaker
Trip Unit Technology	Thermal-magnetic

### Complementary

· · · · · · · · · · · · · · · · · · ·		
Line Rated Current	15 A	
Number of Poles	3P	
Breaking capacity code	A	
Mounting Mode	Unit mount	
Magnetic Hold Current	275 A	
Magnetic Tripping Current	600 A	
Electrical connection	Lugs, load Lugs, line	
Terminal identifier	AL50FA	
Phase connection	ABC	
Height	6.4 in (162.6 mm)	
Width	4.5 in (114.3 mm)	
Depth	4.13 in (104.90 mm)	
Circuit breaker application	HACR rated	

### Environment

Certifications UL Listed CSA	
---------------------------------	--

## Ordering and shipping details

Category	US10DE200903
Discount Schedule	0DE2
GTIN	785901423546
Returnability	No
Country of origin	MX

#### **Packing Units**

Unit Type of Package 1

PCE

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Number of Units in Package 1	1	
Package 1 Height	6.18 in (15.7 cm)	
Package 1 Width	6.18 in (15.7 cm)	
Package 1 Length	9.80 in (24.9 cm)	
Package 1 Weight	4.760 lb(US) (2.159 kg)	


## **Contractual warranty**

Warranty

18 months

# Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

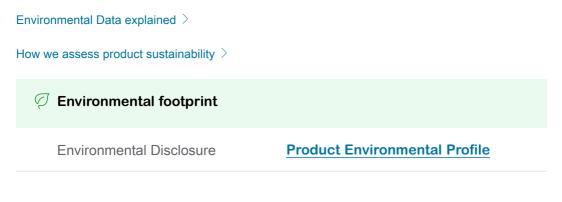

### **Use Better**

Materials and Substances	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China RoHS Regulation	China RoHS declaration
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause Birth Defects or other reproductive harm.For more information go to www.p65warnings.ca.gov