Product datasheet

Specifications





12w Industrial FPM, Harmony FP6, WXGA, 16M colors, PCAP Multi Touch (2 points) with optimized noise filter, DVI, USB Type B, 24V DC

HMIFP6600WCD

EAN Code: 3606481808257

Main

Range of product	Harmony FP6	
Product or component type	Touch panel screen	
Operating system	Windows 10 (version 1809)	

Complementary

display size	12.1 inch				
Aspect ratio	16:9				
Display type	LED Colour TFT LCD				
display resolution	1280 x 800 pixels WXGA				
Display colour	16 million colours				
Touch panel	Multi-touch projected capactive technology (PCT)				
Pixel resolution	1280 x 800				
Backlight lifespan	50000 hours at 25 °C				
Integrated connection type	DVI-D video port USB type B USB 2.0				
[Us] rated supply voltage	24 V DC				
Power consumption in W	15.9 W				
Inrush current	30 A				
Type of cooling	Natural				
Device mounting	Panel mounting Direct mounting VESA				
Cut-out dimensions	295 (+ 1/- 0) x 217 (+ 1/- 0) mm				
Width	308.5 mm				
Depth	67.5 mm				
Height	230.5 mm				
Net weight	3.9 kg				

Environment

Standards CE

FCC part 15 UL 61010-2-201

CSA C22.2 No 61010-2-201

-					
Product certifications	RCM				
	KC				
	UKCA DNV (except 22" wide display) ATEX zone 2				
	ATEX zone 22 dust CULus Class 1 Division 2				
	IECEx zone 2 (DC model, front USB cover must be locked with screw)				
	IECEx zone 22 (DC model, front USB cover must be locked with screw)				
IP degree of protection	IP66f				
- '	IP67f				
	Type 1				
	Type 4X				
	**				
	Type 12				
	Type 13				
Ambient air temperature for	055 °C				
operation					
Ambient air temperature for storage	-2060 °C				
Pollution degree	2				
Operating altitude	2000 m				
Vibration resistance	1 gn (f = 59 Hz) - single amplitude - conforming to IEC 61131-2				
	1 gn (f = 9150 Hz) - fixed amplitude - conforming to IEC 61131-2				
	1 gn - X, Y, Z directions for 10 cycles (approx. 100 min) - conforming to IEC 61131-2				
Shock resistance	147 m/s² conforming to IEC 61131-2				
Chock redictance	· · · · · · · · · · · · · · · · · · ·				
	147 m/s² 3 shocks in each direction X, Y and Z				
Electromagnetic compatibility	Electrostatic discharge immunity test 6 kV contact discharge conforming to IEC				
	61000-4-2 level 3				
	Electrostatic discharge immunity test 8 kV air discharge conforming to IEC 61000-4-2				
	level 3				
	Electrical fast transient/burst immunity test 2 kV power ports conforming to IEC 61000-4-4				
	Electrical fast transient/burst immunity test 1 kV signal ports conforming to IEC				
	61000-4-4				

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15 cm
Package 1 Width	55 cm
Package 1 Length	82 cm
Package 1 Weight	3.09 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End of Life Information			

Dimensions Drawings

Dimensions

External Dimensions

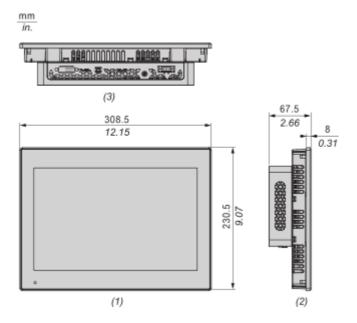


- (1): Front (2): Left
- (3): Bottom

HMIFP6600WCD

Connections and Schema


Mounting

Panel Cut Dimension

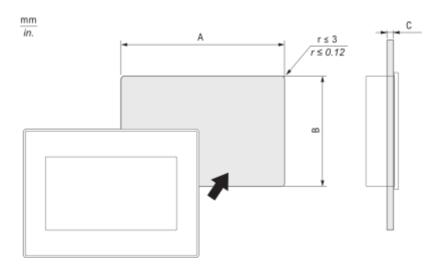

Α		В		C	
mm	in.	mm	in.	mm	in.
295 (+1, -0)	11.61 (+0.04, -0)	217 (+1, -0)	8.54 (+0.04, -0)	1.65	0.060.2

Mounting Orientation

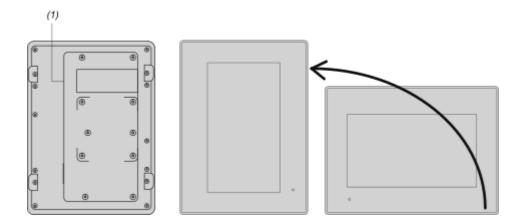


(1): Power connector

 $\textbf{Note:} \ \ \text{For portrait orientation mounting, make sure the screen editing software supports the function.}$

Mounting Angle

HMIFP6600WCD

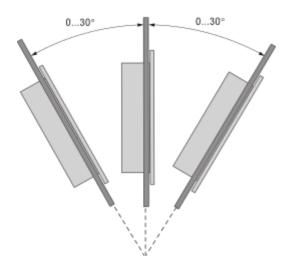

Clearance

