Product datasheet

Specifications





19w Industrial FPM, Harmony FP6, Full HD, 16M colors, PCAP Multi Touch (2 points) with optimized noise filter, DVI, USB Type B, 24V DC

HMIFP6800WCD

EAN Code: 3606481808295

Main

| Range of product | Harmony FP6 | |
|---------------------------|---------------------------|--|
| Product or component type | Touch panel screen | |
| Operating system | Windows 10 (version 1809) | |

Complementary

| display size | 18.5 inch | | | | |
|----------------------------|--|--|--|--|--|
| Aspect ratio | 16:9 | | | | |
| Display type | LED Colour TFT LCD | | | | |
| display resolution | 1920 x 1080 pixels full HD | | | | |
| Display colour | 16 million colours | | | | |
| Touch panel | Multi-touch projected capactive technology (PCT) | | | | |
| Pixel resolution | 1920 x 1080 | | | | |
| Backlight lifespan | 50000 hours at 25 °C | | | | |
| Integrated connection type | DVI-D video port USB type B USB 2.0 | | | | |
| [Us] rated supply voltage | 24 V DC | | | | |
| Power consumption in W | 30.6 W | | | | |
| Inrush current | 30 A | | | | |
| Type of cooling | Natural | | | | |
| Device mounting | Panel mounting Direct mounting VESA | | | | |
| Cut-out dimensions | 449.5 (+ 1/- 0) x 279.5 (+ 1/- 0) mm | | | | |
| Width | 463.6 mm | | | | |
| Depth | 69.5 mm | | | | |
| Height | 293.6 mm | | | | |
| Net weight | 6.3 kg | | | | |

Environment

Standards CE

FCC part 15 UL 61010-2-201

CSA C22.2 No 61010-2-201

| Product certifications | RCM KC UKCA DNV (except 22" wide display) ATEX zone 2 ATEX zone 22 dust CULus Class 1 Division 2 IECEx zone 2 (DC model, front USB cover must be locked with screw) IECEx zone 22 | | |
|---------------------------------------|--|--|--|
| IP degree of protection | IP66f IP67f Type 1 Type 4X Type 12 Type 13 | | |
| Ambient air temperature for operation | 055 °C | | |
| Ambient air temperature for storage | -2060 °C | | |
| Pollution degree | 2 | | |
| Operating altitude | 2000 m | | |
| Vibration resistance | 1 gn (f = 59 Hz) - single amplitude - conforming to IEC 61131-2 1 gn (f = 9150 Hz) - fixed amplitude - conforming to IEC 61131-2 1 gn - X, Y, Z directions for 10 cycles (approx. 100 min) - conforming to IEC 61131-2 | | |
| Shock resistance | 147 m/s² conforming to IEC 61131-2 147 m/s² 3 shocks in each direction X, Y and Z | | |
| Electromagnetic compatibility | Electrostatic discharge immunity test 6 kV contact discharge conforming to IEC 61000-4-2 level 3 Electrostatic discharge immunity test 8 kV air discharge conforming to IEC 61000-4-2 level 3 Electrical fast transient/burst immunity test 2 kV power ports conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test 1 kV signal ports conforming to IEC 61000-4-4 | | |

Packing Units

| Unit Type of Package 1 | PCE |
|------------------------------|---------|
| Number of Units in Package 1 | 1 |
| Package 1 Height | 15 cm |
| Package 1 Width | 55 cm |
| Package 1 Length | 82 cm |
| Package 1 Weight | 5.98 kg |

Contractual warranty

| Warranty | 18 months | |
|----------|-----------|--|



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

| Reach Regulation | REACh Declaration | | |
|--------------------------|--|--|--|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) | | |
| China Rohs Regulation | China RoHS declaration | | |
| Environmental Disclosure | Product Environmental Profile | | |
| Circularity Profile | End of Life Information | | |

Dimensions Drawings

Dimensions

External Dimensions

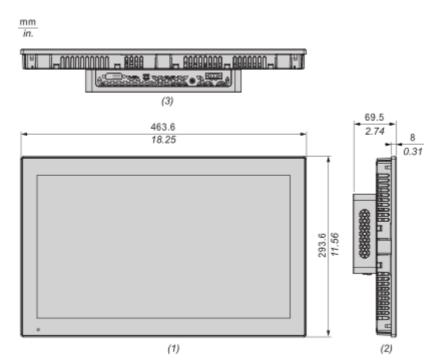


- (1): Front
- (2): Left

HMIFP6800WCD

Connections and Schema


Mounting

Panel Cut Dimension

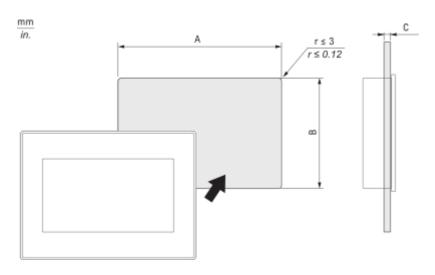

| Α | | В | | С | |
|----------------|------------------|----------------|------------------|------|---------|
| mm | in. | mm | in. | mm | in. |
| 449.5 (+1, -0) | 17.7 (+0.04, -0) | 279.5 (+1, -0) | 11.0 (+0.04, -0) | 1.65 | 0.060.2 |

Mounting Orientation

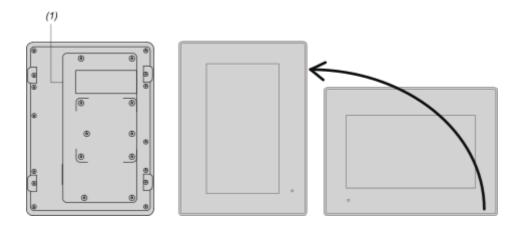


(1): Power connector

 $\textbf{Note:} \ \ \text{For portrait orientation mounting, make sure the screen editing software supports the function.}$

Mounting Angle

HMIFP6800WCD

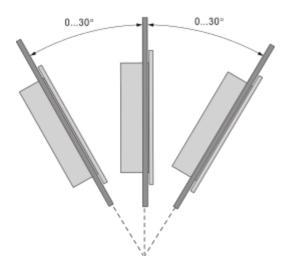

Clearance

