

# Product datasheet

Specifications



Easy Panel PC,Performance  
15.6" Wide DC, Perf PPC, Core  
i5 CPU, 8GB RAM, 128GB  
SSD,ETHx2, USBx4, COMx2,  
Remote Switch,Win10

HMIPSPS752D1X01

## Main

Range of product	Easy Harmony iPC
Product or component type	Touch panel screen
Processor name	Intel Core i5 6200U at 2.3 GHz
Free slots	1 2.5" SATA 1 M.2 (support mSATA SSD SSD and NVMe SSD)
Display size	15.6 inch
Display colour	16777216 colors
Luminance	400 cd/m²
Pixel resolution	1366 x 768
Operating system	Windows 10 IoT Enterprise 64 bitmultilingual
Software package	EcoStruxure Machine SCADA Expert run time HMI/SCADA license not included

## Complementary

Number of points	1
Terminal type	Touchscreen display
Memory type	8 GB RAM DDR4 on-board
Data storage equipment	128 GB mSATA SSD
Aspect ratio	16:9
Display type	Colour TFT LCD LED
Display resolution	1366 x 768 pixels FWXGA
Backlight lifespan	50000 hours
View angle horizontal x vertical	160 x 170°
Touch panel	Single touch analogue resistive
Type of cooling	Passive Fanless
Watchdog timer	1...255 ms
Integrated connection type	1 male SUB-D 9 connector RS232/RS485/RS422 on switchable (default RS232) 1 male SUB-D 9 connector RS232/RS485/RS422 on switchable (default RS422/RS485) 4USB 3.0 port 2 RJ45 connector Ethernet port at 10/100/1000 Mbit/s 1 HDMI connector HDMI 1 removable spring connector connector digital input

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Us] rated supply voltage	12...24 V DC - 15...20 %
[In] rated current	1.9 A
Power consumption in W	29...60 W
Surface finish	Aluminium black
Material	Aluminium alloy
Fixing mode	Panel mounting: by clips and screws (0...50 °C)
Mounting plate description	75 mm x 75 mm VESA mounting
Width	400 mm
Height	254 mm
Depth	50.5 mm
Cut-out dimensions	390 x 244 mm
Net weight	3.79 kg
	15.6" wide single-touch
Main type	Performance

## Environment


IP degree of protection	IP65 front panel: IP20 rear panel:
Product certifications	CE
Standards	IEC 61000-4-2 IEC 61000-4-3 IEC 61000-6-4 IEC 61000-6-5
Directives	2006/95/EC - low voltage directive
Ambient air temperature for operation	0...55 °C SSD 0...45 °C HDD
Ambient air temperature for storage	-20...60 °C
Relative humidity	10...95 % non-condensing
Operating altitude	2000 m
Vibration resistance	1 gn (f = 3...150 Hz)SSD

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.7 cm
Package 1 Width	41.8 cm
Package 1 Length	58.4 cm
Package 1 Weight	5.88 kg
Unit Type of Package 2	P06
Number of Units in Package 2	8
Package 2 Height	97.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	36.0 kg
Pallet unit layers	4

Pallet layers	2
<b>Offer Sustainability</b>	
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

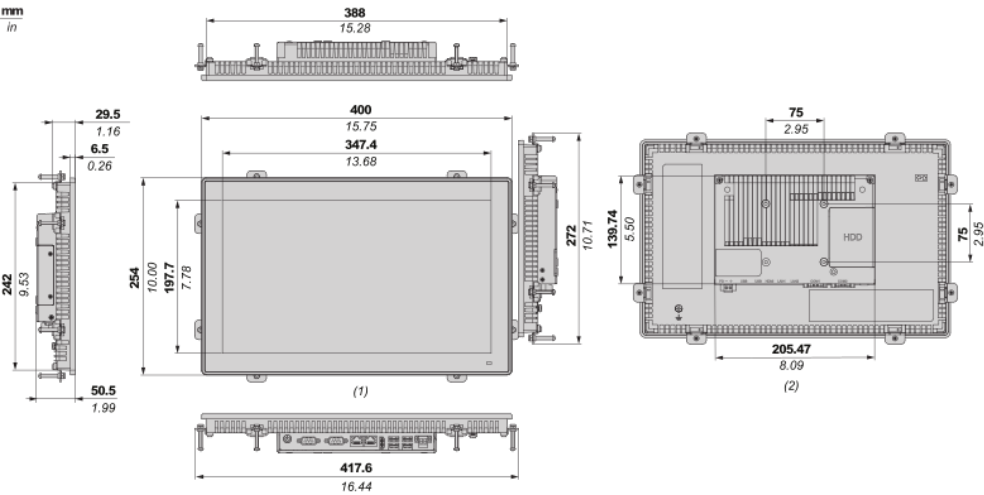

- (1) : Front view
- (2) : Back view

Recommended replacement(s)