

Easy Panel PC, Performance 18.5" Wide DC, Perf PPC, Core i5 CPU, 8GB RAM, 128GB SSD, ETHx2, USBx4, COMx2, Remote Switch, Win10

HMIPSPS952D1X01

#### Main

Range Of Product	Easy Harmony iPC	
Product Or Component Type	Touch panel screen	
Processor Name	Intel Core i5 6200U at 2.3 GHz	
Free Slots	1 2.5" SATA 1 M.2 (support mSATA SSD SSD and NVMe SSD)	
Display Size	18.5 inch	
Display Colour	16777216 colors	
Luminance	450 cd/m²	
Pixel Resolution	1366 x 768	
Operating System	Windows 10 IoT Enterprise 64 bitmultilingual	
Software Package	EcoStruxure Machine SCADA Expert run time HMI/SCADA license not included	

#### Complementary

oumplemental y		
Number Of Points	1	
Terminal Type	Touchscreen display	
Memory Type	8 GB RAM DDR4 on-board	
Data Storage Equipment	128 GB mSATA SSD	
Aspect Ratio	16:9	
Display Type	Colour TFT LCD LED	
Display Resolution	1366 x 768 pixels FWXGA	
Backlight Lifespan	50000 hours	
View Angle Horizontal X Vertical	160 x 170°	
Touch Panel	Single touch analogue resistive	
Type Of Cooling	Passive Fanless	
Watchdog Timer	1255 ms	
ntegrated Connection Type  1 male SUB-D 9 connector RS232/RS485/RS422 on switchable (default RS2 1 male SUB-D 9 connector RS232/RS485/RS422 on switchable (default RS4 RS485) 4USB 3.0 port 2 RJ45 connector Ethernet port at 10/100/1000 Mbit/s 1 HDMI connector HDMI 1 removable spring connector connector digital input		
[Us] Rated Supply Voltage	1224 V DC - 1520 %	

[In] Rated Current	1.9 A	
Power Consumption In W	3360 W	
Surface Finish	Aluminium black	
Material	Aluminium alloy	
Fixing Mode	Panel mounting: by clips and screws (050 °C)	
Mounting Plate Description	75 mm x 75 mm VESA mounting	
Width	467 mm	
Height	292.5 mm	
Depth	51.5 mm	
Cut-Out Dimensions	457 x 283 mm	
Net Weight	4.72 kg	
Display Size	18.5" wide single-touch	
Main Type	Performance	

# **Environment**

Ip Degree Of Protection	IP65 front panel: IP20 rear panel:	
Product Certifications	CE	
Standards	IEC 61000-4-2 IEC 61000-4-3 IEC 61000-6-4 IEC 61000-6-5	
Directives	2006/95/EC - low voltage directive	
Ambient Air Temperature For Operation	055 °C SSD 045 °C HDD	
Ambient Air Temperature For Storage	-2060 °C	
Relative Humidity	1095 % non-condensing	
Operating Altitude	2000 m	
Vibration Resistance	1 gn (f = 3150 Hz)SSD	

## **Packing Units**

r adming dimes	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.7 cm
Package 1 Width	41.8 cm
Package 1 Length	58.4 cm
Package 1 Weight	6.81 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	8
Package 2 Height	97.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	46.0 kg

Pallet Unit Layers	4
Pallet Layers	2

## Sustainability

Green Premium<sup>TM</sup> label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

## Well-being performance




Reach Free Of Svhc

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

#### **Dimensions Drawings**

#### **Dimensions**

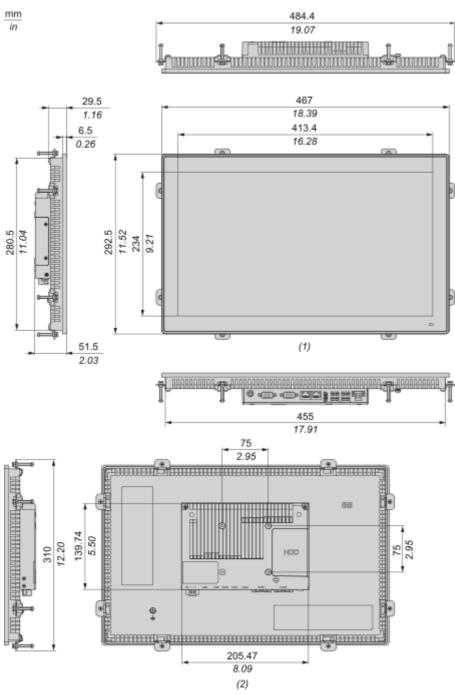

- (1): Front view
- (2) : Back view