

# Product data sheet

Specifications



Time delay auxiliary contact block, TeSys Deca, 1NO + 1NC, off delay 10-180s, front, screw clamp terminals

LADR4

Product availability : Stock - Normally stocked in distribution facility

Price\* : 157.20 USD

## Main

Range	TeSys TeSys Deca
Product name	TeSys Deca
Product or Component Type	Time delay auxiliary contact block
Range compatibility	TeSys Deca CAD TeSys Deca LC1D TeSys F LC1F TeSys F CR1F
Mounting Location	Front
Pole contact composition	1 NO + 1 NC
Contacts operation	Time delay
Timer type	Off delay
Time delay range	10...180 s
[Ue] rated operational voltage	690 V AC 25...400 Hz
[Ie] rated operational current	6 A120 V AC-15 1.04 A690 V AC-15 0.55 A125 V DC-13 0.1 A600 V DC-13
[Ui] rated insulation voltage	690 V IEC 60947-5-1 600 V UL 60947-5-1 600 V CSA C22.2 No 60947-5-1
[Ith] conventional free air thermal current	10 A 140 °F (60 °C)
Standards	GB/T 14048.5
Product Certifications	IECEE CB Scheme UL CSA CCC EAC UKCA

## Complementary

Irms rated making capacity	140 A <= 690 V AC IEC 60947-5-1 250 A <= 690 V DC IEC 60947-5-1
Permissible short-time rating	100 A 140 °F (60 °C) 1 s 120 A 140 °F (60 °C) 500 ms 140 A 140 °F (60 °C) 100 ms

\* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Protection type	GG fuse 10 A
Mechanical durability	5 Mcycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Non-overlap time	1.5 ms on de-energisation no overlap between NC and NO contact 1.5 ms on energisation no overlap between NC and NO contact
Insulation resistance	> 10 MOhm
Connections - terminals	screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible with cable end screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible without cable end screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )rigid screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible with cable end screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible without cable end screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )rigid screw clamp terminals
Tightening torque	15.05 lbf.in (1.7 N.m) flat Ø 6 mm 15.05 lbf.in (1.7 N.m) Philips No 2 15.05 lbf.in (1.7 N.m) pozidriv No 2
Height	1.89 in (48 mm)
Width	1.73 in (44 mm)
Depth	2.40 in (61 mm)
Color	Dark grey

## Environment

Environmental characteristic	Normal environment
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TH IEC 60068
Ambient Air Temperature for Storage	-76...176 °F (-60...80 °C)
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Operating altitude	9842.52 ft (3000 m)

## Ordering and shipping details

Category	22341-CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	3389110386233
Returnability	Yes
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.05 in (5.200 cm)
Package 1 Width	2.56 in (6.500 cm)
Package 1 Length	1.97 in (5.000 cm)
Package 1 Weight	2.67 oz (75.600 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.05 in (5.200 cm)

Package 2 Width	5.04 in (12.800 cm)
Package 2 Length	9.45 in (24.000 cm)
Package 2 Weight	26.67 oz (756.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	140
Package 3 Height	11.81 in (30.000 cm)
Package 3 Width	11.81 in (30.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	24.54 lb(US) (11.129 kg)


### Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: Cancer - <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

### Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

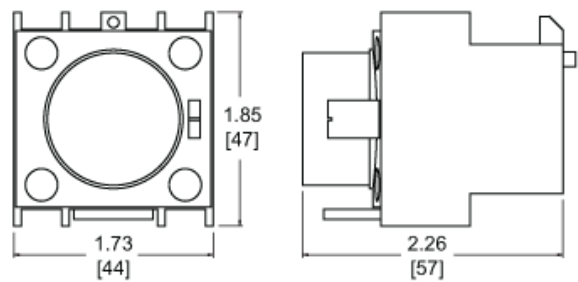

Recommended replacement(s)