



# TeSys Deca, thermal overload relay, 1 to 1.6 A, class 10A

LRD06

Product availability: Stock - Normally stocked in distribution facility

Price\*: 60.00 USD

#### Main

Range	TeSys	
	TeSys Deca	
Product name	TeSys LRD	
	TeSys Deca	
Product or Component Type	Differential thermal overload relay	
Device short name	LRD	
Relay application	Motor protection	
Product Compatibility	LC1D25	
	LC1D32	
	LC1D12	
	LC1D18	
	LC1D38	
	LC1D09	
Network type	DC	
	AC	
Thermal overload class	Class 10A IEC 60947-4-1	
Thermal protection adjustment range	11.6 A	
[Ui] rated insulation voltage	Power circuit 600 V CSA	
	Power circuit 600 V UL	
	Power circuit 690 V IEC 60947-4-1	

# Complementary

Network Frequency	0400 Hz	
Mounting support	Plate, with specific accessories Rail, with specific accessories Under contactor	
Tripping threshold	1.14 +/- 0.06 Ir IEC 60947-4-1	
Auxiliary contact composition	1 NO + 1 NC	
ch] conventional free air thermal 5 A signalling circuit		
Permissible current	3 A 120 V AC-15 signalling circuit 0.22 A 125 V DC-13 signalling circuit	
Ue] rated operational voltage 690 V AC 0400 Hz power circuit IEC 60947-4-1		
Associated fuse rating	4 A gG for signalling circuit 4 A BS for signalling circuit	
[Uimp] rated impulse withstand voltage	6 kV	
Phase failure sensitivity	Tripping current 130 % of Ir on two phase, the last one at 0	
Control type Red push-button stop Blue push-button reset		

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Temperature compensation	-4140 °F (-2060 °C)	
Connections - terminals	Control circuit screw clamp terminals 2 0.0020.004 in² (12.5 mm²) flexible without cable end	
	Control circuit screw clamp terminals 2 0.0020.004 in² (12.5 mm²) flexible with cable end	
	Control circuit screw clamp terminals 2 0.0020.004 in² (12.5 mm²) solid without cable end	
	Power circuit screw clamp terminals 1 0.0020.02 in² (1.510 mm²) flexible without cable end	
	Power circuit screw clamp terminals 1 0.0020.006 in <sup>2</sup> (14 mm <sup>2</sup> ) flexible with cable end	
	Power circuit screw clamp terminals 1 0.0020.009 in $^{\!2}$ (16 mm $^{\!2}$ ) solid without cable end	
Tightening torque	Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals	
Height	2.6 in (66 mm)	
Width	1.8 in (45 mm)	
Depth	2.8 in (70 mm)	
et Weight 0.273 lb(US) (0.124 kg)		

### **Environment**

Climatic withstand	withstand IACS E10	
IP degree of protection	IP20 conforming to IEC 60529	
Ambient air temperature for operation	-4140 °F (-2060 °C) without derating IEC 60947-4-1	
Ambient Air Temperature for Storage	-76158 °F (-6070 °C)	
Flame retardance	V1 conforming to UL 94	
Mechanical robustness	Vibrations6 Gn IEC 60068-2-6 Shocks15 Gn for 11 ms IEC 60068-2-7	
Dielectric strength	1.89 kV 50 Hz IEC 60947-1	
Standards	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 UL 60947-5-1 CSA C22.2 No 60947-4-1 CSA C22.2 No 60947-5-1 GB/T 14048.4 GB/T 14048.5 EN 50495	
Product Certifications	IEC UL CSA CCC EAC BV RINA DNV-GL LROS (Lloyds register of shipping) ATEX INERIS UKCA	

# Ordering and shipping details

Category	US10I1222347	
Discount Schedule	0112	
GTIN	3389110346763	
Returnability	Yes	
Country of origin	FR	

# **Packing Units**

•		
Unit Type of Package 1	PCE	
Number of Units in Package 1	<b>1</b> 1	
Package 1 Height	1.929 in (4.900 cm)	
Package 1 Width	3.031 in (7.700 cm)	
Package 1 Length	3.465 in (8.800 cm)	
Package 1 Weight	5.005 oz (141.900 g)	
Unit Type of Package 2	S02	
Number of Units in Package 2	24	
Package 2 Height	5.906 in (15.000 cm)	
Package 2 Width	11.811 in (30.000 cm)	
Package 2 Length	15.748 in (40.000 cm)	
Package 2 Weight	8.045 lb(US) (3.649 kg)	

# **Contractual warranty**

Warranty 18 months

## Sustainability Green Premium\*

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance

<b>②</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>②</b>	Rohs Exemption Information	Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
	Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Oct 30, 2024

**Dimensions Drawings** 

#### **Approximate Dimensions**

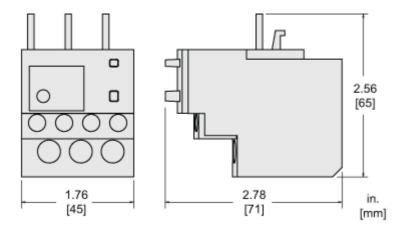

## Product data sheet

LRD06

Image of product / Alternate images

**Alternative** 





