


# Product datasheet

Specifications

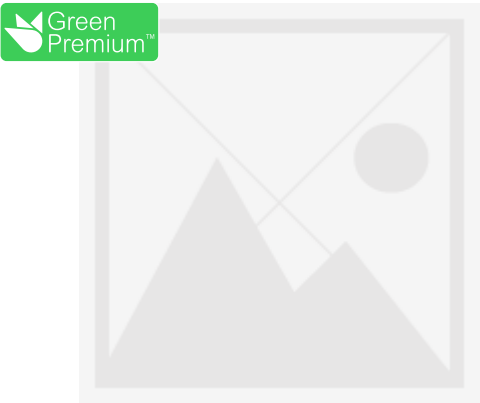

## NSX400S 400A Mic6.3A 3P3D

LV432414X63A400

### Main

Product or component type	Circuit breaker
Device short name	Compact NSX400
Circuit breaker name	Compact NSX400
Device application	Distribution
Poles description	3P
Breaking capacity code	S
Trip unit name	MicroLogic 6.3 A
Trip unit technology	Thermal-magnetic
Trip unit rating	400 A

### Complementary

Network frequency	50 Hz
Control type	Toggle
Mounting mode	Fixed
[In] rated current	400 A at 40 °C
[Ui] rated insulation voltage	800 V 50 Hz
[Ue] rated operational voltage	690 V 50/60 Hz
Breaking capacity	100 kA Icu
[Ics] rated service breaking capacity	100 kA
Connection pitch	45 mm

### Environment

IP degree of protection	IP40 conforming to IEC 60947-2
IK degree of protection	IK07 conforming to IEC 62262

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>

Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty

Warranty	18 months
----------	-----------

## Recommended replacement(s)