# **Product datasheet**

Specification





## Circuit breaker, EasyPact MVS, 3 Poles, 800A, 50kA, EDO, ETA6, drawout, electrical

MVS08N3NW6A

### Main

Range	EasyPact
Product name	MVS08N
Device short name	MVS08N
Product or component type	Circuit breaker
Device application	Distribution
poles description	3P
Protected poles description	3P 3d
[In] rated current	800 A at 40 °C
network type	AC
[Ue] rated operational voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
Breaking capacity code	N
Suitability for isolation	Yes conforming to IEC 60947-2
Utilisation category	Category B
Trip unit name	ETA6G
Trip unit technology	Electronic
Trip unit rating	800 A

### Complementary

-	
Network frequency	50/60 Hz
Control type	Electrically operated
Mounting mode	Drawout
Mounting support	Rail Base plate
Connection position	Horizontal Vertical
Location of connection	Rear
[Ui] rated insulation voltage	1000 V AC 50/60 Hz conforming to IEC 60947-2
[Uimp] rated impulse withstand voltage	12 kV conforming to IEC 60947-2
circuit breaker CT rating	800 A
Breaking capacity	50 kA lcu at 220440 V AC 50/60 Hz conforming to IEC 60947-2
[Ics] rated service breaking capacity	50 kA (Ics) at 220440 V AC 50/60 Hz conforming to IEC 60947-2

Mechanical durability	20000 cycles (with maintenance) conforming to IEC 60947-2 10000 cycles (without maintenance) conforming to IEC 60947-2							
Electrical durability	Category B: 6000 cycles 440 V AC 50/60 Hz without maintenance conforming to IEC							
	60947-2 Category B: 4000 cycles 690 V AC 50/60 Hz without maintenance conforming to IEC 60947-2							
Connection pitch	115 mm without spreader							
Contact position indicator	Yes							
[lcm] rated short-circuit making capacity	105 kA (Icm) at 220440 V AC 50/60 Hz conforming to IEC 60947-2							
[lcw] rated short-time withstand	50 kA (1 s) at 220440 V AC 50/60 Hz conforming to IEC 60947-2							
current	42 kA (1 s) at 690 V AC 50/60 Hz conforming to IEC 60947-2 25 kA (3 s) at 440/690 V AC 50/60 Hz conforming to IEC 60947-2							
Trip unit protection functions	LSIG							
Protection type	Instantaneous short-circuit protection Short time short-circuit protection							
	Earth fault							
	Overload protection (long time)							
Fault indication	Short-circuit Earth fault							
	Internal fault							
	Overload							
Long time pick-up adjustment type Ir	Adjustable 9 settings							
Long time pick-up adjustment range	0.41 x ln							
Long time delay adjustment type	Adjustable 9 settings							
[tr] long-time delay adjustment range	0.524 s at 6 x lr							
Short-time pick-up adjustment type Isd	Adjustable 9 settings							
[Isd] short-time pick-up adjustment range	1.510 x lr							
Short-time delay adjustment type	Adjustable 5 settings							
[tsd] short-time delay adjustment range	100400 ms							
Instantaneous pick-up adjustment type li	Adjustable 9 settings							
instantaneous pick-up adjustment range	Off 215 x ln							
ground-fault pick-up adjustment type	Adjustable 9 settings							
ground-fault time delay adjustment type -tg	Adjustable 5 settings							
[tg] ground-fault time delay adjustment range	100400 ms							
[lg] ground-fault pick-up adjustment range	0.21 x ln							
Zone selective interlocking ZSI	With							
Display type	Digital display							
type of measurement	Current							
Current sensor rating range	400/2000 A							
Maximum breaking time	25 ms							
Maximum closing response time	70 ms							
Height	439 mm							
Width	441 mm							
Depth	395 mm							

Net weight 70 kg

### **Environment**

Standards	IEC 60947-2						
Product certifications	IEC						
	CCC						
	CCS						
	GOST						
Pollution degree	4 conforming to IEC 60664-1						
IP degree of protection	IP40						
Ambient air temperature for operation	-570 °C						
Ambient air temperature for	-4085 °C without control unit						
storage	-2585 °C with control unit						

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	42.0 cm
Package 1 Width	35.0 cm
Package 1 Length	50.0 cm
Package 1 Weight	38.0 kg

## **Contractual warranty**

Warranty 18 months

## Sustainability Screen Premium

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance



Mercury Free



Rohs Exemption Information

Yes

#### **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration  Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information


10 Aug 2024

### **Product datasheet**

### MVS08N3NW6A

### **Dimensions Drawings**

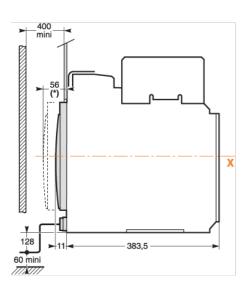


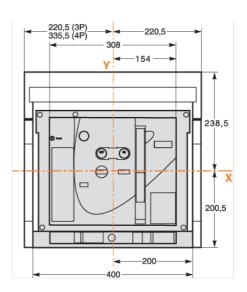


### **Product datasheet**

### MVS08N3NW6A


### Assembly

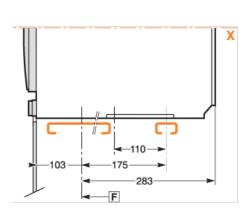

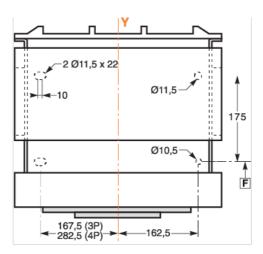

#### MVS08N3NW6A


#### Performance Curves

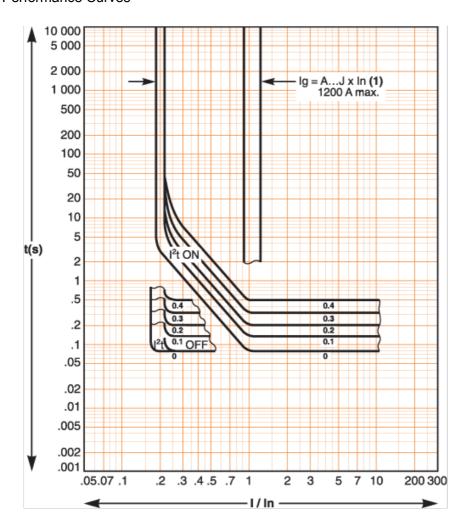

(1)

lg = ln x	Α	В	С	D	Е	F	G	Н	J
In ≤ 400 A	0.3	0.3	0.4	0.5	0.6	0.7	8.0	0.9	1
400 A < In ≤ 1000 A	0.2	0.3	0.4	0.5	0.6	0.7	8.0	0.9	1
In ≥ 1250A	500	640	720	800	880	960	1040	1120	1200

#### MVS08N3NW6A

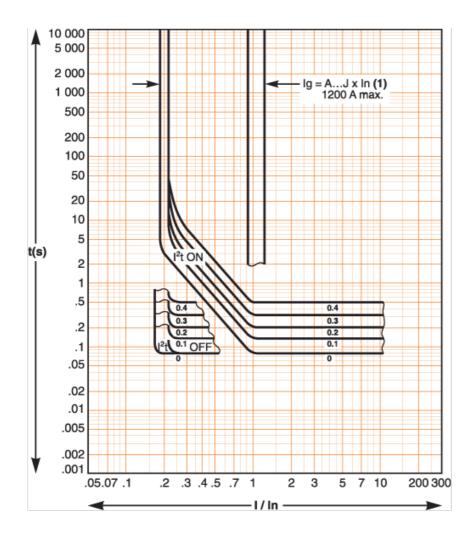

(1)

lg = ln x	Α	В	С	D	Е	F	G	Н	J
In ≤ 400 A	0.3	0.3	0.4	0.5	0.6	0.7	8.0	0.9	1
400 A < In ≤ 1000 A	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
In ≥ 1250A	500	640	720	800	880	960	1040	1120	1200