


Product data sheet

Specifications

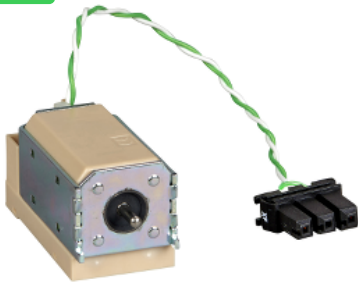

MVS XF 100/130V AC/DC

MVS15511

Main

Range of product	EasyPact MVS
Range	EasyPact
Device short name	XF
Product or component type	Closing coil
Device application	Control
Range compatibility	EasyPact (EasyPact MVS) circuit breaker
Voltage release type	Closing coil

Complementary

Control type	Electrically operated
Control signal type	Maintained
[Uc] control circuit voltage	110/130 V AC/DC 50/60 Hz
Threshold tripping voltage	Remote control: 0.85...1.1 Un closing
Supply holding power	4.5 W 4.5 VA
Supply inrush power	200 VA 200 ms 200 W 200 ms
Response time	70 ms at 800 A (EasyPact MVS) 70 ms at 100 A (EasyPact MVS) 70 ms at 1250 A (EasyPact MVS) 70 ms at 1600 A (EasyPact MVS) 70 ms at 2000 A (EasyPact MVS) 70 ms at 2500 A (EasyPact MVS) 70 ms at 3200 A (EasyPact MVS) 70 ms at 4000 A (EasyPact MVS)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	6.0 cm
Package 1 Length	8.5 cm
Package 1 Weight	149.0 g
Unit Type of Package 2	BB1

Number of Units in Package 2	10
Package 2 Height	9.0 cm
Package 2 Width	13.0 cm
Package 2 Length	19.0 cm
Package 2 Weight	1.556 kg
Unit Type of Package 3	S03
Number of Units in Package 3	30
Package 3 Height	30.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	5.155 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)