


# Product datasheet

Specifications

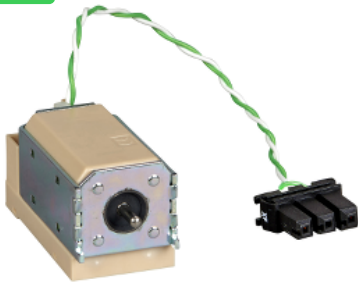

## MVS XF 200/250V AC/DC

MVS15512

### Main

Range of product	EasyPact MVS
Range	EasyPact
Device short name	XF
Product or component type	Closing coil
Device application	Control
Range compatibility	EasyPact (EasyPact MVS) circuit breaker
Voltage release type	Closing coil

### Complementary

Control type	Electrically operated
Control signal type	Maintained
[Uc] control circuit voltage	220/250 V AC/DC 50/60 Hz
Threshold tripping voltage	Remote control: 0.85...1.1 Un closing
Supply holding power	4.5 VA 4.5 W
Supply inrush power	200 VA 200 ms 200 W 200 ms
Response time	70 ms at 800 A (EasyPact MVS) 70 ms at 100 A (EasyPact MVS) 70 ms at 1250 A (EasyPact MVS) 70 ms at 1600 A (EasyPact MVS) 70 ms at 2000 A (EasyPact MVS) 70 ms at 2500 A (EasyPact MVS) 70 ms at 3200 A (EasyPact MVS) 70 ms at 4000 A (EasyPact MVS)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	6 cm
Package 1 Length	8.5 cm
Package 1 Weight	149 g
Unit Type of Package 2	BB1

Number of Units in Package 2	10
Package 2 Height	9 cm
Package 2 Width	13 cm
Package 2 Length	18.5 cm
Package 2 Weight	1.548 kg
Unit Type of Package 3	S03
Number of Units in Package 3	30
Package 3 Height	30 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	5.131 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------

### Recommended replacement(s)