# **Product datasheet**

Specification





universal protection relay, PowerLogic P3U20, 4L ringlug, 1U, 10DI/5DO, Uaux: 48-230V, DI: 24-230V, RS-485

REL52034

### Main

Range Of Product	PowerLogic P3	
Product Or Component Type	Protection relay	
Relay Application	Universal	
Product Reference	P3U20-6AAA1ABAA	
Mounting Case Size	20TE	
Power Supply	48230 V AC/DC	
Measuring Inputs	: 1/5 A CT phase current 3 : 1/5 A CT residual current 1 : 100 V/110 V VT voltage 1	
Number Of Digital Inputs (Di)	10	
Number Of Digital Outputs (Do)	1 watchdog 5	
Number Of Analogue Inputs	0	
Number Of Analogue Outputs	0	
Type Of Temperature Module Connection	Copper cable external module Fiber optic cable external module	
Communication Ports	USB port 1 front RS485 1 rear	
Communication Protocols	IEC 60870-5-101 IEC 60870-5-103 DNP3 Modbus RTU DeviceNet SPAbus	
Cybersecurity	Password protection Port hardening	

**Protection Functions** Phase undercurrent 37 Negative sequence overcurrent 46 Broken conductor 46 I2/I1 Excessive starting time, locked rotor 48/51LR Thermal overload protection 49 Phase overcurrent 50/51 Earth fault overcurrent 50N/51N Breaker failure 50BF Switch ON to fault (SOTF) Capacitor bank unbalance 51C Capacitor overvoltage 59C Neutral voltage displacement 59N Motor restart inhibition 66 Directional earth fault 67N Transient earth fault 67NI CT supervision 60 VT supervision 60 H2 detection 68H2 H5 detection 68H5 Recloser 79 Lockout relay 86 Cold load pick-up Programmable stages 99 Programmable curve **Arc Flash Protection** No **Measurement Functions** Current 3-phase Current zero sequence Current positive sequence Current negative sequence Current ratio of negative and positive Voltage phase to earth Voltage phase to phase Voltage zero sequence Voltage positive sequence Voltage negative sequence Voltage ratio of negative and positive Short circuit fault reactance Fault location current Earth fault reactance Frequency Active power RMS active power Reactive power RMS reactive power Apparent power RMS apparent power Active energy Reactive energy Cos φ Tan φ Power angle Power factor Voltage phasor diagram view Current phasor diagram view Current 2nd, 15th harmonics with THD Voltage 2nd, 15th harmonics with THD Voltage interruption Condition monitoring CB wear **Control Functions** Switchgear control and monitoring Programmable switchgear interlocking Local control on single-line diagram Local control with I/O keys Local/remote control 2 function keys Mobile application with Easergy SmartApp Web-server Programmable logic Controllable Switchgear Devices 2 controlled + 4 displayed **Number Of Setting Groups Monitoring Functions** Trip circuit supervision 74 Circuit breaker monitoring Relay self-monitoring

Logs And Records	Event recording Disturbance recording Tripping context
Switchgear Diagnosis Type	CT supervision Trip circuit supervision ANSI code: TCS
Connections - Terminals	Screw removable (digital input/output) Ring lugs removable (current transformer) Pin removable (voltage transformer)

# Complementary

Operating Threshold	24230 V AC/DC
Software Name	EcoStruxure Power Device ESetup Easergy Pro
Web Server	Embedded HTTP server
Display Type	LCD 128 x 64 pixels with single line diagram
Number Of Key	2 customizable
Local Signalling	4 LEDs 8 LEDs programmable
Standards	IEC
Height	169.5 mm
Width	170 mm
Depth	205 mm
Net Weight	2.5 kg maximum

### **Environment**

Electromagnetic Compatibility	Emission tests conforming to IEC/EN 60255-26 ed. 3		
	Emission tests class A conforming to CISPR 11		
	Emission tests class A conforming to CISPR 22		
	EMC immunity conforming to IEC/EN 60255-26 ed. 3		
	EMC immunity conforming to EN/IEC 61000-4-18		
	EMC immunity level 4 conforming to EN/IEC 61000-4-2		
	EMC immunity level 3 conforming to EN/IEC 61000-4-3		
	EMC immunity level 4 conforming to EN/IEC 61000-4-4		
	EMC immunity level 3 conforming to EN/IEC 61000-4-5		
	EMC immunity level 3 conforming to EN/IEC 61000-4-6		
	EMC immunity conforming to EN/IEC 61000-4-8		
	EMC immunity level 5 conforming to EN/IEC 61000-4-9		
	EMC immunity conforming to EN/IEC 61000-4-29		
	EMC immunity conforming to EN/IEC 61000-4-11		
	EMC immunity conforming to EN/IEC 61000-4-17		
Mechanical Robustness	Vibrations (level: class II) conforming to IEC 60255-21-1		
	Vibrations: Fc conforming to IEC 60068-2-6		
	Shocks (level: class II) conforming to IEC 60255-21-2		
	Shocks: Ea conforming to IEC 60068-2-27		
	Seismic tests method A (level: class II) conforming to IEC 60255-21-3		
	Bumps (level: class II) conforming to IEC 60255-21-2		
	Bumps: Ea conforming to IEC 60068-2-27		
Climatic Withstand	Exposure to dry heat Bb tests conforming to EN/IEC 60068-2-2		
	Exposure to cold Ad tests conforming to EN/IEC 60068-2-1		
	Exposure to damp heat in service Db tests conforming to EN/IEC 60068-2-30		
	Exposure to damp heat in service Cab tests conforming to EN/IEC 60068-2-78		
Ambient Air Temperature For Operation	-4065 °C		
Ip Degree Of Protection	IP54 conforming to IEC 60529		
Relative Humidity	095 %, without condensation		
	2000 m		
Maximum Operating Altitude	2000 111		

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16 cm
Package 1 Width	21.5 cm
Package 1 Length	27.5 cm
Package 1 Weight	3.5 kg

## **Contractual warranty**

Warranty

Up to 10 years extended warranty (Standard warranty 2 years. Please check with your local SE representative for extended warranty availability and conditions)



Green Premium<sup>TM</sup> label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO2 products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance




Rohs Exemption Information

#### **Certifications & Standards**

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Connections and Schema

#### **Functional View**

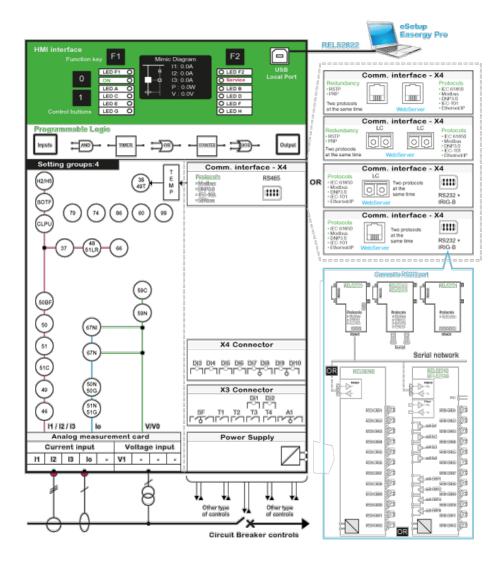


### **REL52034**

### **Dimensions Drawings**

#### **Base Unit Dimensions**

 $\frac{\text{mm}}{\text{in.}}$ 

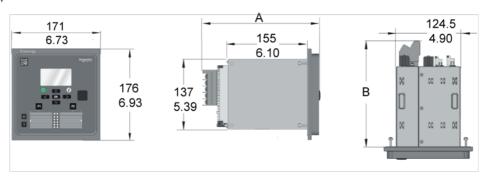

	Α	В
With screw connector	214 mm/8.43"	192 mm/7.6"
With ring-lug connector	226 mm/8.90"	204 mm/8.0"