# **Product datasheet**

Specifications





universal protection relay, PowerLogic P3U30, 4L ringlug, 4U, 16DI/8DO, Uaux: 48-230V, DI: 110-230V, 2 x RJ-45

REL52008

#### Main

mann	
Range of product	PowerLogic P3
Product or component type	Protection relay
relay application	Universal
product reference	P3U30-6AAA2BCAA
Mounting case size	30TE
power supply	48230 V AC/DC
measuring inputs	: 1/5 A CT phase current 3 : 1/5 A CT residual current 1 : 100 V/110 V VT voltage 4
number of Digital Inputs (DI)	16
number of Digital Outputs (DO)	1 watchdog 8
number of analogue inputs	0
number of analogue outputs	0
communication ports	USB port 1 front RJ45 2 rear
communication protocols	IEC 61850 ed. 1 IEC 61850 ed. 2 IEC 60870-5-101 DNP3 TCP Modbus TCP EtherNet/IP
Redundancy communication port protocol	RSTP PRP
Cybersecurity	Port hardening Password protection

#### protection functions

Arc flash protection

Phase overcurrent 50/51 Directional phase overcurrent 67 Earth fault overcurrent 50N/51N Directional earth fault 67N Transient earth fault 67NI Capacitor bank unbalance 51C Broken conductor 46 I2/I1 Cold load pick-up Switch ON to fault (SOTF) Breaker failure 50BF Directional active underpower 37P Fault locator 21FL Recloser 79 Phase undercurrent 37 Excessive starting time, locked rotor 48/51LR Motor restart inhibition 66 Capacitor overvoltage 59C Negative sequence overcurrent 46 Overvoltage 59 Undervoltage 27 Positive sequence undervoltage 27P Earth fault overvoltage 59N Underfrequency 81/81N Rate of change of frequency 81R Synchro-check 25 Lockout relay 86 CT supervision 60 VT supervision 60 H2 detection 68H2 H5 detection 68H5 Negative sequence overcurrent 47 Programmable stages 99 Programmable curve

#### measurement functions Current 3-phase Current zero sequence Current positive sequence Current negative sequence Current ratio of negative and positive Voltage phase to earth Voltage phase to phase Voltage zero sequence Voltage positive sequence Voltage negative sequence Voltage ratio of negative and positive Short circuit fault reactance Fault location current Earth fault reactance Frequency Active power RMS active power

No

Reactive power RMS reactive power Apparent power RMS apparent power Active energy Reactive energy Cos  $\phi$ Tan  $\phi$ Power angle Power factor

control functions

Condition monitoring CB wear Switchgear control and monitoring Programmable switchgear interlocking Local control on single-line diagram Local control on single-line diagram Local control with I/O keys Local/remote control 2 function keys Mobile application with Easergy SmartApp Web-server Programmable logic

Voltage phasor diagram view Current phasor diagram view Current 2nd, 15th harmonics with THD Voltage 2nd, 15th harmonics with THD

Voltage interruption

controllable switchgear devices	4 controlled + 8 displayed	
number of setting groups	4	
monitoring functions	Trip circuit supervision 74 Circuit breaker monitoring Relay self-monitoring	
logs and records	Event recording Disturbance recording Tripping context	
Switchgear diagnosis type	CT/VT supervision ANSI code: 60 CT supervision Trip circuit supervision ANSI code: TCS	
Connections - terminals	Screw removable (digital input/output) Ring lugs removable (current transformer) Pin removable (voltage transformer)	

## Complementary

Operating threshold	110230 V AC/DC	
Time synchronisation protocol	SNTP	
Software name	EcoStruxure Power Device ESetup Easergy Pro	
Web server	Embedded HTTP server	
Display type	LCD 128 x 64 pixels with single line diagram	
Number of key	2 customizable	
Local signalling	4 LEDs 8 LEDs programmable	
Standards	IEC	
Height	169.5 mm	
Width	170 mm	
Depth	205 mm	
Net weight	2.5 kg maximum	

## Environment

Mechanical robustness	Vibrations (level: class II) conforming to IEC 60255-21-1 Vibrations: Fc conforming to IEC 60068-2-6 Shocks (level: class II) conforming to IEC 60255-21-2 Shocks: Ea conforming to IEC 60068-2-27 Seismic tests method A (level: class II) conforming to IEC 60255-21-3 Bumps (level: class II) conforming to IEC 60255-21-2 Bumps: Ea conforming to IEC 60068-2-27
climatic withstand	Exposure to dry heat Bb tests conforming to EN/IEC 60068-2-2 Exposure to cold Ad tests conforming to EN/IEC 60068-2-1 Exposure to damp heat in service Db tests conforming to EN/IEC 60068-2-30

Exposure to damp heat in service Cab tests conforming to EN/IEC 60068-2-78

Electromagnetic compatibility	Emission tests conforming to IEC/EN 60255-26 ed. 3 Emission tests class A conforming to CISPR 11 Emission tests class A conforming to CISPR 22 EMC immunity conforming to IEC/EN 60255-26 ed. 3 EMC immunity conforming to EN/IEC 61000-4-18 EMC immunity level 4 conforming to EN/IEC 61000-4-2 EMC immunity level 3 conforming to EN/IEC 61000-4-3 EMC immunity level 4 conforming to EN/IEC 61000-4-3 EMC immunity level 3 conforming to EN/IEC 61000-4-5 EMC immunity level 3 conforming to EN/IEC 61000-4-6 EMC immunity level 5 conforming to EN/IEC 61000-4-8 EMC immunity conforming to EN/IEC 61000-4-9 EMC immunity conforming to EN/IEC 61000-4-9 EMC immunity conforming to EN/IEC 61000-4-11 EMC immunity conforming to EN/IEC 61000-4-17	
Ambient air temperature for operation	-4065 °C	
IP degree of protection	IP54 conforming to IEC 60529	
Relative humidity	095 %, without condensation	
maximum operating altitude	2000 m	
Protective treatment	Conformal coating	

## **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	26 cm
Package 1 Width	21.5 cm
Package 1 Length	31.5 cm
Package 1 Weight	3.168 kg

#### **Contractual warranty**

Warranty

Up to 10 years extended warranty (Standard warranty 2 years. Please check with your local SE representative for extended warranty availability and conditions)

## Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance

Rohs Exemption Information

#### **Certifications & Standards**


Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

#### **Product datasheet**

**REL52008** 

#### Connections and Schema


#### **Functional View**

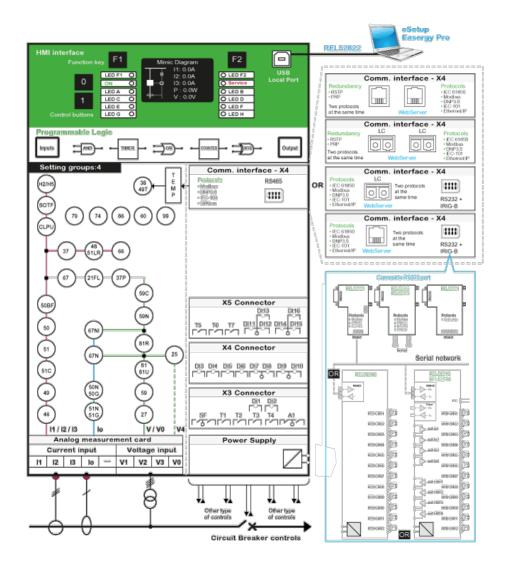

## Product datasheet

#### **Dimensions Drawings**

#### **Base Unit Dimensions**

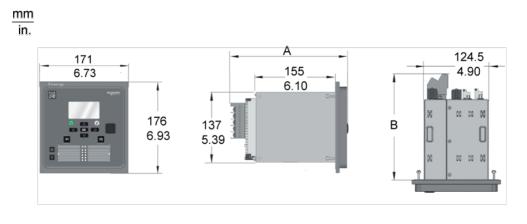

	A	В
With screw connector	214 mm/8.43"	192 mm/7.6"
With ring-lug connector	226 mm/8.90"	204 mm/8.0"