


XGSZ22E4503

Ethernet copper cable, Radio frequency identification XG, Jumper M12/RJ45 straight/ elbowed shielded 3 m

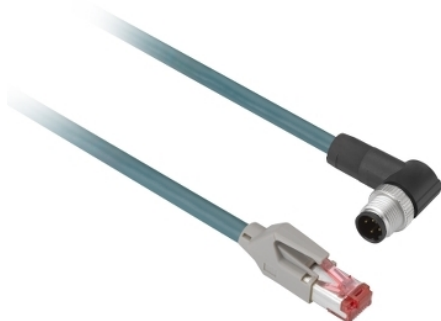

Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part categor	Connection accessories
Accessory / separate part type	Connecting cable
Product or component type	Ethernet copper cable
Product compatibility	XGSZ33ETH XGSZ33EIP XUW
Accessory / separate part destination	Ethernet network

Complementary

Cable length	3 m
Transmission rate	100 Mbit/s
Transmission support medium	2 twisted shielded pairs
Communication network category	5e
AWG gauge	AWG 26
Electrical connection	1 male connector, RJ45 straight connector with 4 pin(s) 1 male connector, M12 elbowed connector with 4 pin(s) - encoding type: D coding
Conductor material	Copper
Cover material	PUR

Environment

IP degree of protection	IP67
Standards	IEC 60754-1 EIA/TIA-568 ISO/IEC 11801 Ed.2, 2002

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.500 cm
Package 1 Width	27.000 cm
Package 1 Length	28.000 cm
Package 1 Weight	162.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	1.980 kg

Offer Sustainability

California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For all Reach Rohs enquiries contact us at

sustainability@tesensors.com

Wiring Diagram

