Specifications





Tower Light - RAG - 24V - LED -Tube mounting with foldable bracket

XVGB3M

Main

Range of product	Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	60 mm
Component name	XVG
Device mounting	Tube mounting with foldable bracket
Light source	LED steady red LED steady green LED steady amber
Light block color	Red/orange/green
Indicator bank base type	Base without buzzer

Complementary

rated supply voltage	24 V AC/DC
Cable cross section	0.33 mm ²
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current consumption	109 mA
Power consumption in W	3.1 W
Fundamental frequency	2.64 kHz
Net weight	0.4 kg

Environment

Product certifications	CE EAC
Ambient air temperature for storage	-3570 °C
Ambient air temperature for operation	-1050 °C
IP degree of protection	IP40

Packing Units

Unit Type of Package 1

PCE

Number of Units in Package 1	1
Package 1 Height	8.3 cm
Package 1 Width	14.0 cm
Package 1 Length	54.4 cm
Package 1 Weight	601.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	5.76 kg
Unit Type of Package 3	P06
Number of Units in Package 3	30
Package 3 Height	72 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	30.6 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free


Rohs Exemption Information

Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Dimensions Drawings

Dimensions

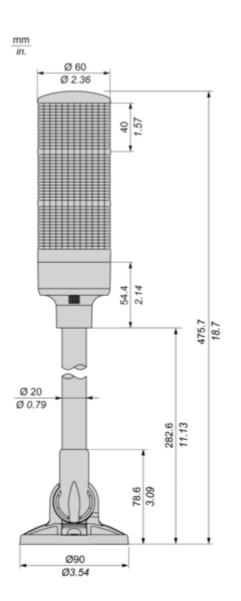


4

Mounting and Clearance

Mounting


Ø73 mm/2.87 in., Standard

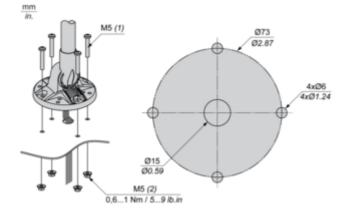


(1) Thickness + 10 mm/0.39 in.

(2) Hexagon Nut with flange

Ø73 mm/2.87 in., 45°

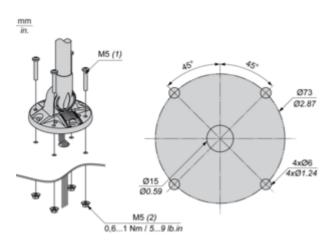

(1) Thickness + 10 mm/0.39 in.(2) Hexagon Nut with flange Ø54 mm/2.13 in., 45°

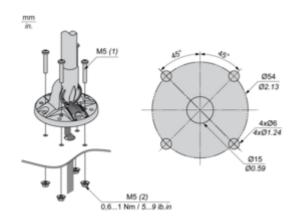


(1) Thickness + 10 mm/0.39 in.

(2) Hexagon Nut with flange

Connections and Schema

Wiring

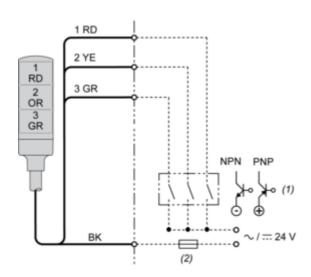

(1) "ON" for lighting and/or applying continuous sound.(2) Fuse (rated current: 0.5 A)

- RD : Red
- YE : Yellow
- **GR** : Green **OR** : Orange
- BK : Black