

# Product datasheet

Specifications



## Tower Light - RAG - 24V - LED - Direct tube mounting

XVGB3T

### Main

Range of product	Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	60 mm
Component name	XVG
Device mounting	Direct tube mounting
Light source	LED steady red LED steady green LED steady amber
Light block color	Red/orange/green
Indicator bank base type	Base without buzzer

### Complementary

rated supply voltage	24 V AC/DC
Cable cross section	0.33 mm²
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current consumption	109 mA
Power consumption in W	3.1 W
Fundamental frequency	2.64 kHz
Net weight	0.39 kg

### Environment

Product certifications	CE EAC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
IP degree of protection	IP23

### Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Number of Units in Package 1	1
Package 1 Height	9.000 cm
Package 1 Width	14.000 cm
Package 1 Length	57.000 cm
Package 1 Weight	606.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	5.525 kg
Unit Type of Package 3	P06
Number of Units in Package 3	24
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	25.075 kg

## Contractual warranty

Warranty	18 months
----------	-----------

# Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	37
---	----

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	No
--	----

Packaging without single use plastic	No
--------------------------------------	----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

China RoHS Regulation	<a href="#">China RoHS declaration</a>
-----------------------	--

## Use Again


### Repack and remanufacture

Circularity Profile	<a href="#">End of Life Information</a>
---------------------	---

Take-back	No
-----------	----

Dimensions Drawings


Dimensions

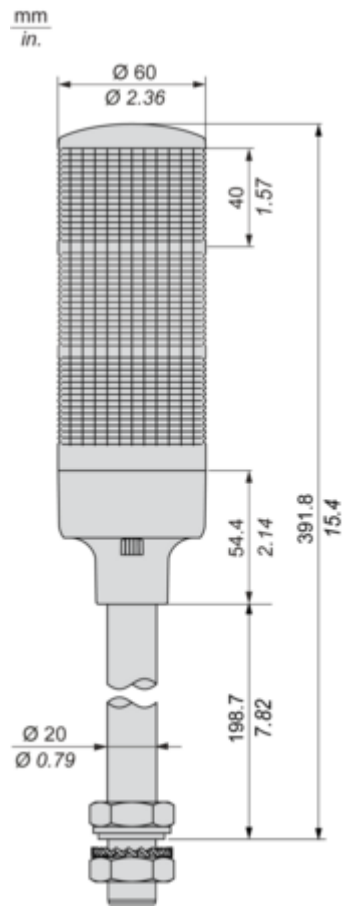

Mounting and Clearance


Mounting

---

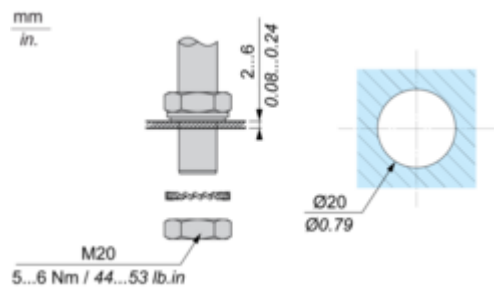

Connections and Schema

Wiring

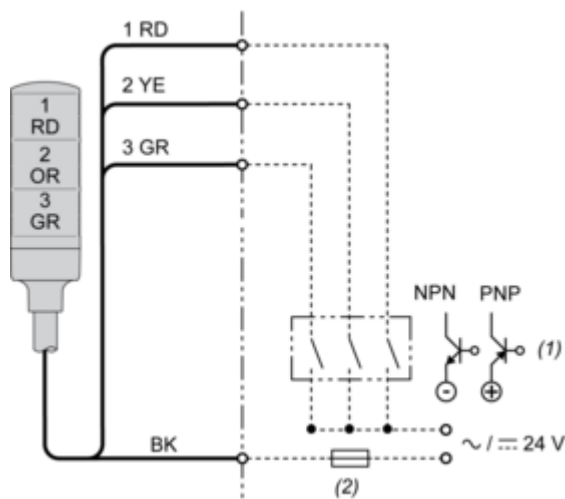

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 0.5 A)

RD : Red

YE : Yellow


GR : Green

OR : Orange

BK : Black

## Technical Illustration


## Dimensions

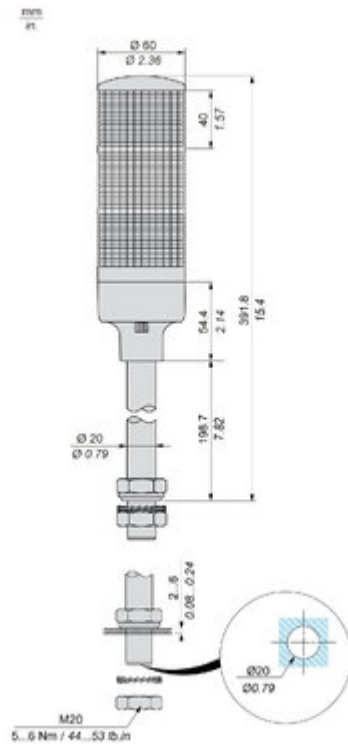

Technical Illustration

Wiring diagram

---

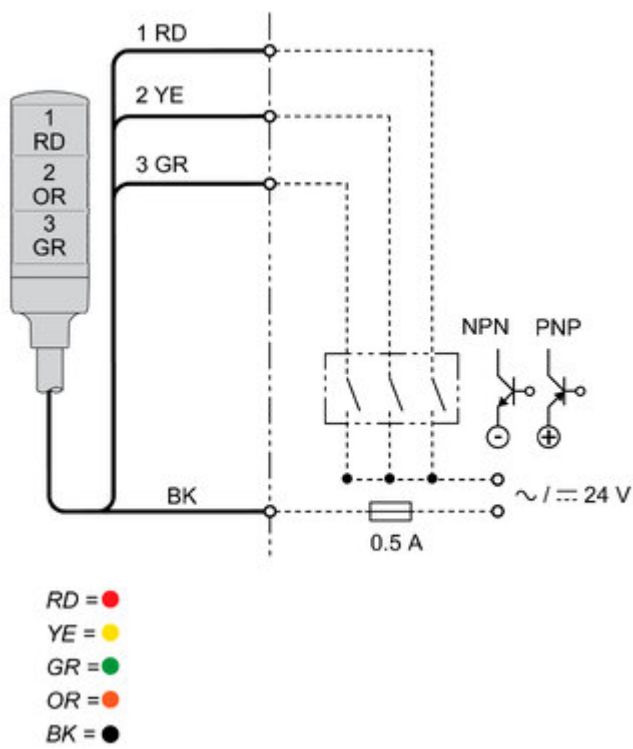



Offer Marketing Illustration

Product benefits / Features

---

### Features

Easy Harmony XVG



Pre-assembled and  
Pre-wired with color  
code



Long distance machine  
status by clear lens  
design



Less maintenance  
thanks to LEDs



Integrated 85dB  
buzzer



Wide mounting options  
for all kind of  
applications



Offer Marketing Illustration

Product benefits / Features

---

Technical Benefits

Easy Harmony XVG

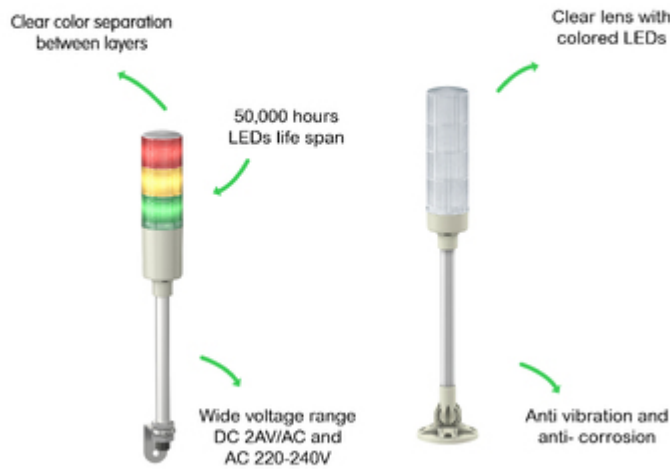


Image of product / Alternate images

Alternative

---







Image of product in real life situation

