

Product datasheet

Specifications



Monolithic tower lights, Easy Harmony XVG, 60mm, red orange green, steady light, aluminium tube mounting, IP23, 220...240V AC

XVGM3T

Main

Range of product	Easy Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe
Mounting diameter	60 mm
Component name	XVG
Device mounting	Direct tube mounting
Light source	LED steady
Light block color	Red/orange/green
Indicator bank base type	Base without buzzer

Complementary

Rated supply voltage	220...240 V AC
Cable cross section	0.33 mm²
Discrete output type	PNP
[Uimp] rated impulse withstand voltage	4.0 kV
Current consumption	50 mA
Power consumption in VA	8.1 VA
Net weight	0.44 kg

Environment

Product certifications	CE CCC EAC
Ambient air temperature for storage	-20...65 °C
Ambient air temperature for operation	0...50 °C
Electrical shock protection class	Class II
Overvoltage category	III conforming to IEC 60947-5-1

IP degree of protection	IP23
-------------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.82 cm
Package 1 Width	8.0 cm
Package 1 Length	56.38 cm
Package 1 Weight	650.0 g
Unit Type of Package 2	S06
Number of Units in Package 2	30
Package 2 Height	73.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	25.66 kg


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

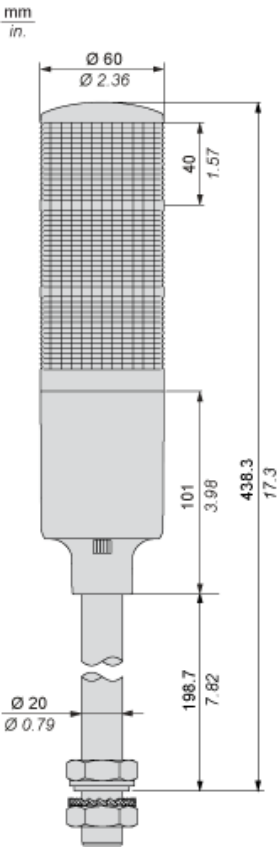

Mounting

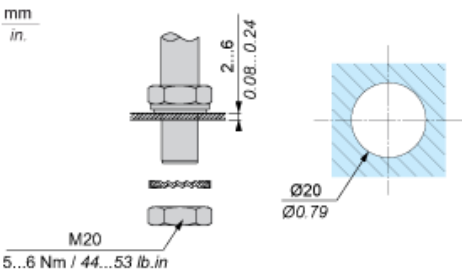

Wiring

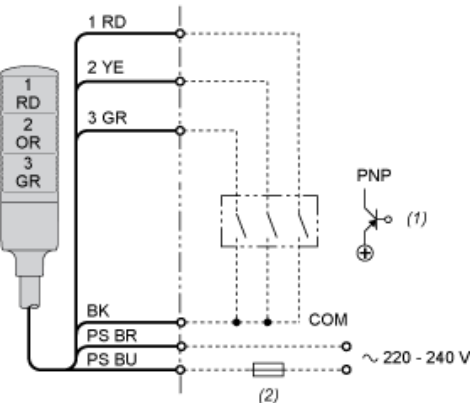

- (1)

“ON” for lighting and/or applying continuous sound.
- (2)

Fuse (rated current: 1 A)
- RD :

Red
- YE :

Yellow
- GR :

Green
- OR :

Orange
- BK :

Black
- PS BR :

Power Supply Brown
- PS BL :

Power Supply Blue

Recommended replacement(s)