

Product datasheet

Specifications



illuminated unit - Ø 45 - red - BA 15d
- bulb not included - ≤ 230 V AC
DC

XVMC34

Main

| | |
|------------------------------------|---|
| Range of product | Harmony XVM |
| Product or component type | Indicator bank |
| Beacon or indicator bank unit type | Illuminated unit |
| Component name | XVM |
| Light source | Bulb not included, red |
| Bulb type | Incandescent with BA 15d base Super bright LED Flash discharge tube |
| [Us] rated supply voltage | ≤ 230 V AC/DC |

Complementary

| | |
|--|--|
| Mounting diameter | 45 mm |
| Assembly style | Customer assembly |
| Maximum power dissipation in W | 5 W |
| Connections - terminals | Screw terminals, 1 x 0.325...1 x 1.5 mm ² |
| Marking | CE |
| [Ui] rated insulation voltage | 250 V conforming to IEC 60947-1 |
| Nominal voltage limit | 0.85...1.1 Un conforming to IEC 60947-5-1 |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1 |
| Luminance | 650 cd/m ² |
| CAD overall width | 47 mm |
| CAD overall height | 65 mm |
| CAD overall depth | 47 mm |
| Net weight | 0.04 kg |

Environment

| | |
|------------------------|------------------------------------|
| Product certifications | CCC |
| Standards | EN/IEC 60947-1 EN/IEC 60947-5-1 |

| | |
|--|---|
| Ambient air temperature for storage | -25...70 °C |
| Ambient air temperature for operation | -10...50 °C |
| IP degree of protection | IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529 |
| Electrical shock protection class | Class I aluminium tube mounting conforming to IEC 60947-1 Class I aluminium tube mounting conforming to IEC 60947-5-1 Class I aluminium tube mounting conforming to IEC 61140 Class II base mounting conforming to IEC 60947-1 Class II base mounting conforming to IEC 60947-5-1 Class II base mounting conforming to IEC 61140 |
| Protective treatment | TC |

Packing Units

| | |
|-------------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 5.1 cm |
| Package 1 Width | 7.2 cm |
| Package 1 Length | 12.9 cm |
| Package 1 Weight | 48 g |
| Unit Type of Package 2 | S01 |
| Number of Units in Package 2 | 25 |
| Package 2 Height | 15 cm |
| Package 2 Width | 15 cm |
| Package 2 Length | 40 cm |
| Package 2 Weight | 1.436 kg |

Offer Sustainability

| | |
|-----------------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |


Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get b dimension.

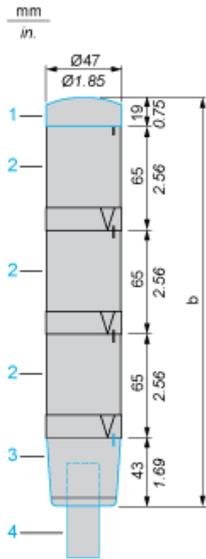

- (1) Cover (included with base unit XVMC21/C29•)
- (2) Illuminated unit
- (3) Base unit XVMC21 (without buzzer) or XVMC29• (with buzzer), to be ordered separately
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

| Number of illuminated units (ref. 2) | b in mm | b in in. |
|--------------------------------------|---------|----------|
| 1 | 127 | 5.00 |
| 2 | 192 | 7.56 |
| 3 | 257 | 10.12 |
| 4 | 322 | 12.68 |
| 5 | 387 | 15.24 |

Recommended replacement(s)