



# contact block ZB2 - 1 NC contact - spring return

ZB2BE102C

#### Main

Range of product	Easy Harmony XB2
Product or component type	Complete body/contact assembly
Component name	ZB2
Electrical circuit type	Control circuit
Contact block application	Single speed
Contact block type	Single
Type of operator	Spring return
Product compatibility	ZB2C
Contacts type and composition	1 NC
Mounting of block	Front mounting
Sale per indivisible quantity	1
Device short name	XB2
Device presentation	Basic element
Body type	Body for control button
Contact operation	Slow-break

#### Complementary

Mechanical durability	3000000 cycles	
Contact code designation	A600 AC-15, Ue = 240 V, Ie = 3 A conforming to IEC 947-5-1 appendix A A600 AC-15, Ue = 600 V, Ie = 1.2 A conforming to IEC 947-5-1 appendix A Q600 DC-13, Ue = 250 V, Ie = 0.27 A conforming to IEC 947-5-1 appendix A Q600 DC-13, Ue = 600 V, Ie = 0.1 A conforming to IEC 947-5-1 appendix A	
[Ithe] conventional enclosed thermal current	10 A	
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to EN/IEC 60947-1	
[Uimp] rated impulse withstand voltage	6 kV conforming to EN/IEC 60947-1	
Maximum resistance across terminals	25 MOhm	
Operating force	35 N	
Short-circuit protection	10 A fuse protection by cartridge fuse type gG (gI)	
Rated operational power in W	40 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 120 V, load factor = 0.5 conforming to IEC 60947-5-1 48 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 48 V, load factor = 0.5 conforming to IEC 60947-5-1 65 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 24 V, load factor = 0.5 conforming to IEC 60947-5-1	
Terminals description ISO n°1	(11-12)NC	

Net weight	0.015 kg
Height	29 mm
Width	15 mm
Depth	24 mm
Connections - terminals	Screw clamps terminals
Fixing collar material	Zamak
Connections - terminals	Screw clamps terminals, 1 x 2.5 mm² with or without cable end Screw clamps terminals, 2 x 1.5 mm² with or without cable end
Contacts material	Silver alloy (Ag/Ni)
Contacts usage	Standard contacts
Connections - terminals	Screw clamp terminal, <= 2 x 1.5 mm <sup>2</sup> with and without cable ends Screw clamp terminal, <= 1 x 2.5 mm <sup>2</sup> with and without cable ends Screw clamp terminal, >= 1 x 0.5 mm <sup>2</sup> with and without cable ends Faston terminals, connection size: 6.3 mm
Electrical durability	1000000 cycles, AC-15, 3 A at 240 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C 1000000 cycles, DC-13, 0.27 A at 250 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda$ < 10exp(-6) at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4 $\Lambda$ < 10exp(-8) at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4
[le] rated operational current	3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1 0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1
Short-circuit protection	10 A gL fuse type gG conforming to EN/IEC 60947-5-1
[Ith] conventional free air thermal current	10 A conforming to EN/IEC 60947-5-1
Positive opening	With conforming to EN/IEC 60947-5-1 appendix K
Operating travel	1.5 mm (NO changing electrical state) 5 mm (total travel)
Shape of screw head	Cross compatible with Philips no 1 screwdriver Cross compatible with pozidriv No 1 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver
Protective treatment	тс/тн
Customizable	No
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Tightening torque	0.81.0 N.m
Fixing mode	Fixing screw beneath head recommended torque: 0.8 N.m Fixing screw beneath head recommended torque: 1.0 N.m
Environment	
Ambient air temperature for operation	-2570 °C
Ambient air temperature for storage	-4070 °C
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Electrical shock protection class	
	Class II conforming to IEC 61140

Standards EN/IEC 60947-1
EN/IEC 60947-5-1
EN/IEC 60947-5-4
GB/T 14048.1
GB/T 14048.5

## **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.5 cm
Package 1 Width	2.79 cm
Package 1 Length	2.87 cm
Package 1 Weight	15.5 g
Unit Type of Package 2	S02
Number of Units in Package 2	200
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.5 kg
Unit Type of Package 3	P06
Number of Units in Package 3	4000
Package 3 Height	90 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	69.2 kg



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance

Reach Free Of Svhc

Mercury Free

Rohs Exemption Information


Yes

#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

#### **Dimensions Drawings**


#### **Dimensions**



e: clamping thickness 1 to 6 mm / 0.04 to 0.24 in.

**Technical Illustration** 

#### **Dimensions**

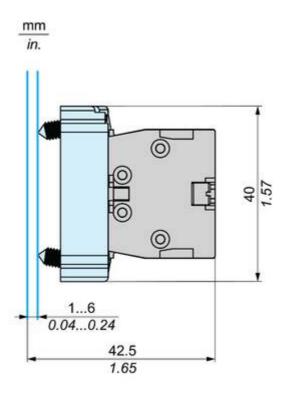

#### **ZB2BE102C**

Offer Marketing Illustration

**Product benefits / Features** 



#### **Product datasheet**

#### **ZB2BE102C**

Offer Marketing Illustration

#### **Product benefits / Features**

# Technical Benefits Easy Harmony XB2



Image of product / Alternate images

#### **Alternative**











