


Home > Electrification > Automation & Control > Contactors > Contactors < 100A > N31E 220-230V 50Hz / 230-240V 60Hz Contactor Relay



♥ [ADD TO WISH LIST](#)

Share with your friends

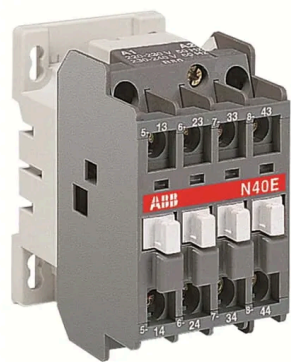

Automation & Control

ABB

N31E 220-230V 50Hz / 230-240V 60Hz Contactor Relay

₹570.90

+ ₹102.76 (GST 18%)

-

1

+

Buy Now

Add to Cart

More Offers available from [13 sellers](#) starting at INR. 673.66

Pin Code

Calculate Shipping

Please enter your PIN Code to check the best offers

Product Id#: 1SBH141001R8031

[Be the first to review this product](#)

Sold and delivered by **System Controls and Switchgears**

N... contactor relays are used for switching auxiliary circuits and control circuits - Poles: 4-pole contactor relays (mechanically linked contact elements available) - Control circuit: AC operated with laminated magnet circuit - Accessories: a wide range of accessories is available.

Genuine products

Dedicated Support

Doorstep Delivery

Enquire Now

More about N31E 220-230V 50Hz / 230-240V 60Hz Contactor Relay

[Technical Specification](#)

https://shop.in.abb.com/1sbh141001r8031/n31e-220-230v-50hz-230-240v-60hz-contactor-relay.html?srsId=AfmBOop64-r96gqJmVWXbFtDogFfVzC...

1/3

MRP (Indian Rupees)	Not for Retail Sale
Compatibility	Auxiliary Contactors
Max Mechanical Switching Frequency	6000 cycles per hour
Conventional Free-air Thermal Current (Ith)	acc. to IEC 60947-5-1, q = 40 °C 16 ampere
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 8 2 volt - ampere, Holding at Max. Rated Control Circuit Voltage 60 Hz 8 2 volt - ampere, Pull-in at Max. Rated Control Circuit Voltage 50 Hz 70 volt - ampere, Pull-in at Max. Rated Control Circuit Volta
Terminal Type	Screw Terminals
Rated Operational Voltage	Main Circuit 690 volt
Operate Time	Between Coil De-energization and NC Contact Closing 9 ... 16 millisecond, Between Coil De-energization and NO Contact Opening 4 ... 11 millisecond, Between Coil Energization and NC Contact Opening 7 ... 21 millisecond, Between Coil Energization and NO Con
Rated Control Circuit Voltage (Uc)	50 Hz 220-230V; 60 Hz 230-240V
Rated Operational Current DC-13 (Ie)	(125 V) 0.55 / 69 ampere, (24 V) 6 / 144 ampere, (250 V) 0.3 / 75 ampere, (48 V) 2.8 / 134 ampere, (72 V) 1 / 72 ampere
Rated Operational Current AC-15 (Ie)	(220 / 240 V) 4 ampere, (24 / 127 V) 6 ampere, (380 / 440 V) 3 ampere, (500 V) 2 ampere, (690 V) 2 ampere
Rated Breaking Capacity acc. to IEC 60947-5-1	10 x Ie AC-15
Rated Frequency Limits	25 ... 400 hertz
Rated Frequency (f)	Supply Circuit 50 60 hertz
Number of Aux Contacts NO	3
Package Width	78 millimetre
Package Length	79 millimetre
Package Height	47 millimetre
Invoice Description	N31E 220-230V 50Hz / 230-240V 60Hz Contactor Relay
Product Range	Auxiliary Contactors
Package Gross Weight	0.34 kilogram
Extended Product Type	N31E 220-230V 50Hz / 230-240V 60Hz
Number of Aux Contacts NC	1
Ambient Air Temperature	Close to Contactor for Storage -60 ... +80 degree Celsius, Near Contactor for Operation in Free Air (Uc) -40 ... +70 degree Celsius, Near Contactor for Operation in Free Air (0.85 ... 1.1 Uc) -40 ... +55 degree Celsius
Rated Insulation Voltage (Ui)	acc. to UL/CSA 600 volt, acc. to IEC 60947-5-1 and VDE 0110 (Gr. C) 690 volt

Enquire Now



Product Class	Block Contactors
Total GST Percentage	18.00
HSN Number	85364900
Country of origin	Bulgaria (BG) - Imported by ABB India Limited

- Download

▼
- Offers

▼
- Reviews

▼

Recently Viewed

 <p><u>N31E 400-415V 50Hz / 415-440V 60Hz Contactor Relay</u> 1SBH141001R8631 ₹763.22</p>	 <p><u>N40E 24V 50Hz / 24V 60Hz Contactor Relay</u> 1SBH141001R8140 ₹731.00</p>	 <p><u>N40E 110V 50Hz / 110-120V 60Hz Contactor Relay</u> 1SBH141001R8440 ₹673.66</p>	 <p><u>N40E 220-230V 50Hz / 230-240V 60Hz Contactor Relay</u> 1SBH141001R8040 ₹603.64</p>
--	--	---	--

Enquire Now

☐ Write to Us

1800 420 0707

@ contactabb.in@abb.com

(Only for India Inquiries)

Disha - Plot No.5 & 6, 2nd Stage, Peenya Industrial Area IV, Peenya 560058, Bangalore, Karnataka, India.

Facebook

Twitter

LinkedIn

Youtube

COMPANY

INFORMATION

PAYMENT METHODS

AboutSell Our Us With Sellers

BlogsExchange and Returns Policy

Privacy Terms Policy of Use

How to create a Company Account

FAQ