



undervoltage release 120-127 V AC 50/60 Hz accessory for: 3VA1 and 3VA20-26

Model		
product brand name	SENTRON	
product designation	Auxiliary release	
accessories	Auxiliary release	
General technical data		
degree of pollution	3	
overvoltage category	III	
apparent power consumption / maximum	2 VA	
Voltage		
surge voltage resistance	4 kV	
Mechanical Design		
height	65.1 mm	
width	25.7 mm	
number of slots	3	
depth	28.8 mm	
net weight	91 g	
tightening torque / with screw-type terminals / minimum	0.4 N·m	
tightening torque / with screw-type terminals / maximum	0.5 N·m	
Connections according IEC		
stripped length	10 mm	
connectable conductor cross-section <ul style="list-style-type: none"><li>• minimum</li><li>• maximum</li></ul>	0.5 ... 1.5	
AWG number / as coded connectable conductor cross section / for auxiliary contacts <ul style="list-style-type: none"><li>• minimum</li><li>• maximum</li></ul>	20 16	
Connetctions according UL		
stripped length [in]	0.4 in	
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in	
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in	
Certificates		
General Product Approval	EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Test Certificates	Marine / Shipping	other	Environment
-------------------	-------------------	-------	-------------

**Environment**

[Environmental Con-  
firmations](#)

**Further information****Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9908-0BB24>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9908-0BB24>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9908-0BB24](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9908-0BB24)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

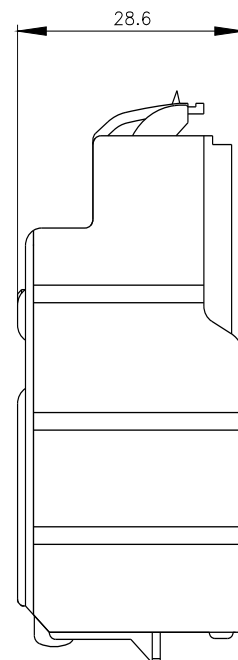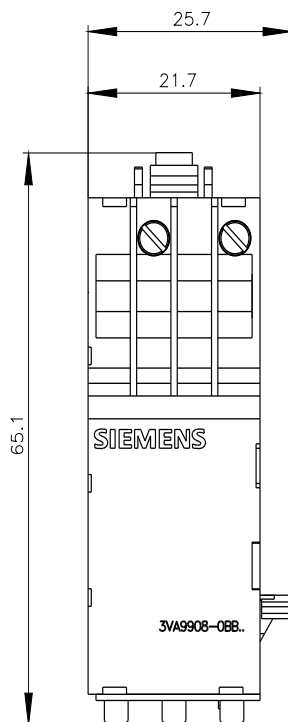

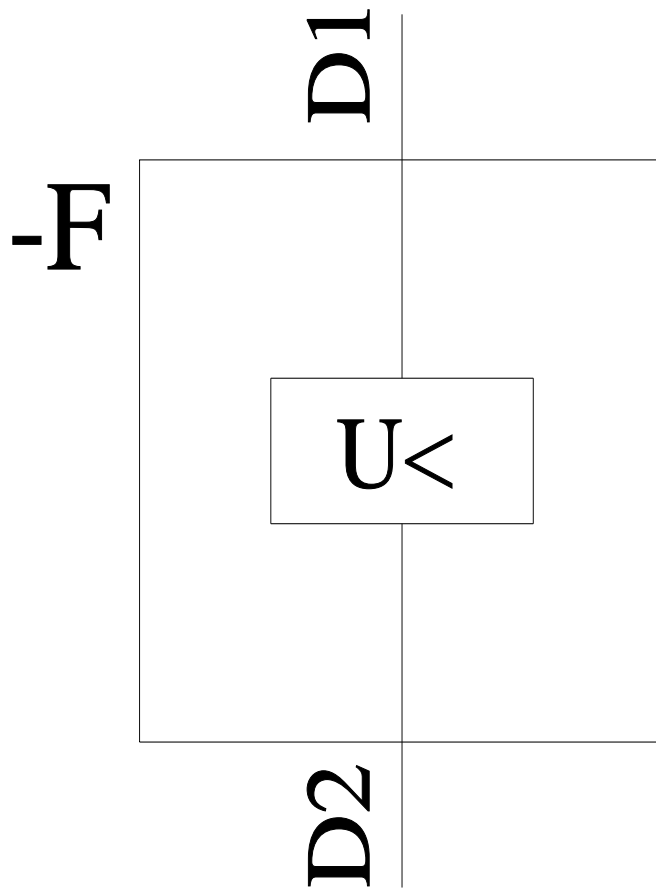

last modified:

5/26/2024 

