## SIEMENS

## Data sheet

## 3VA9988-0AB12




trip alarm switch changeover contacts Type HQ (7 mm) accessory for: 3VA1; 3VA20-26  $\,$ 

SENTRON
Tripped signaling switch
Tripped signaling switch
3
III
4 kV
240 V
250 V
6 A
6 A
6 A
6 A
6 A
6 A
6 A
4 A
2 A
0.5 A
0.25 A
1 A
0.8 A
0.4 A
0.2 A
0.1 A
3 A
3 A
3 A
3 A
3 A
56 mm
7 mm
30 mm
0.4 N·m
0.5 N·m

Connections according	IEC					
stripped length			15 mr	n		
connectable conductor of	cross-section					
• minimum			0.5	1.5		
<ul> <li>maximum</li> </ul>						
AWG number / as coded connectable conductor cross section / for auxiliary contacts						
• minimum			20			
• maximum			16			
Connetctions according	UL					
stripped length [in]			0.6 in			
tightening torque [lbf·in]	tightening torque [lbf·in] / with screw-type terminals / minimum			f·in		
tightening torque [lbf·in]	tightening torque [lbf·in] / with screw-type terminals / maximum			f·in		
Certificates						
General Product Appr	oval					
EG-Konf.	UK CA			VDE	<u>Miscellaneous</u>	KC
proval	EMV	Test Certificate	es	Marine / Shipping	other	
EHC	RCM	<u>Type Test Cer</u> ates/Test Rep	<u>tific-</u> port	Hoyd's Register us	<u>Miscellaneous</u>	<u>Confirmation</u>
other	Environment					
<u>Miscellaneous</u>	Environmental Con- firmations	Environmental firmations				
Further information						_

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0AB12	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0AB12	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0AB12	
CAx-Online-Generator http://www.siemens.com/cax	
Tender specifications	

http://www.siemens.com/specifications

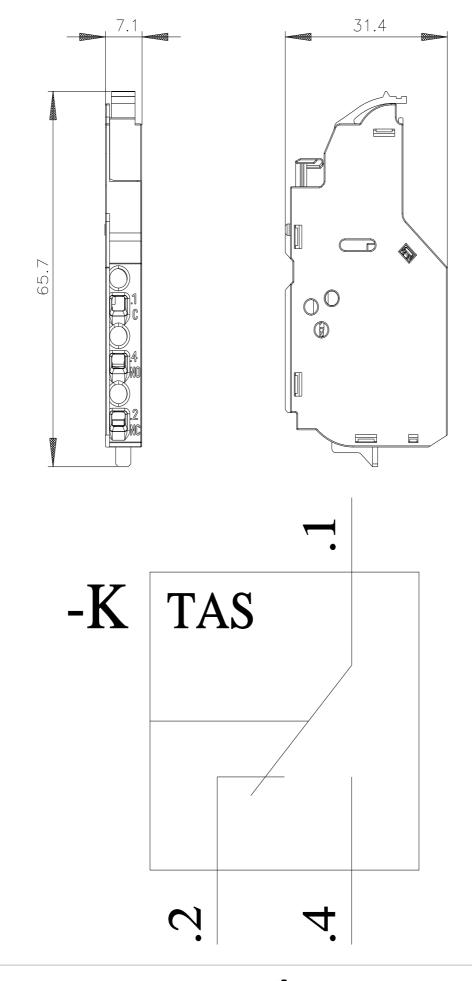

last modified:

12/20/2020 🖸

5/26/2024

Subject to change without notice © Copyright Siemens