



LV HRC fuse element, NH3, In: 425 A, gG, Un AC: 690 V, Un DC: 440 V, Front indicator, live grip lugs

Model		
product designation		LV HRC fuse link
design of the product		With blade contacts
design of an identification indicator		Front indicators
General technical data		
size of fuse system according to EN 60269-1		NH3
operating class of the fuse link		gG
mounting type		non-insulated grip lugs
type of voltage of the operating voltage		AC/DC
supply voltage		
• at AC		690 V
• at DC		440 V
Mechanical Design		
net weight		990 g
Certificates		
reference code according to IEC 81346-2		FC
Approvals Certificates		
General Product Approval	Marine / Shipping	other

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



Environment

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3362-6RC>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3NA3362-6RC>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3362-6RC

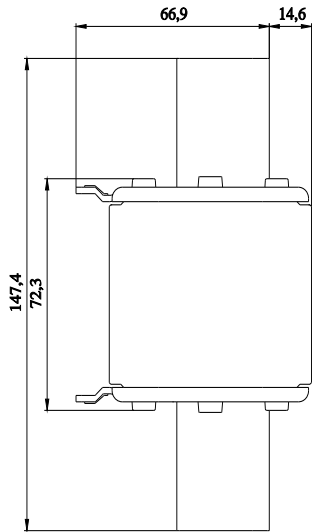

last modified:

6/5/2023 

